

ESS Solution

SE-F5 & SE-F5 Plus & SE-F5 Pro & SE-F12 & SE-F12 Max & SE-F16 & SE-F16 Max



NEW



• SE-F5 & F5 Plus

• SE-F5 Pro

• SE-F12

• SE-F16

• SE-F12 Max

• SE-F16 Max

IP65

IP65

SE-F5 & SE-F5 Plus & SE-F5 Pro & SE-F12 & SE-F12 Max & SE-F16 & SE-F16 Max

Comprehensive Protection

Advanced BMS with active fuse

Superior Performance

Support Max. 1C charge & 1.2C discharge (SE-F5 & F5 Plus), GaN MOSFETs: 50% loss reduction, high-temp resistance

Optimized Energy Density

Integrated PACK: reduced line loss, enhanced energy density

Flexible Expansion

Max. 32 units in parallel


Easy Maintenance

Auto-networking, Local monitoring mode for battery, remote monitoring mode for ESS

Reliable Durability

Operates reliably in -20°C to 55°C, natural cooling

ESS Solution

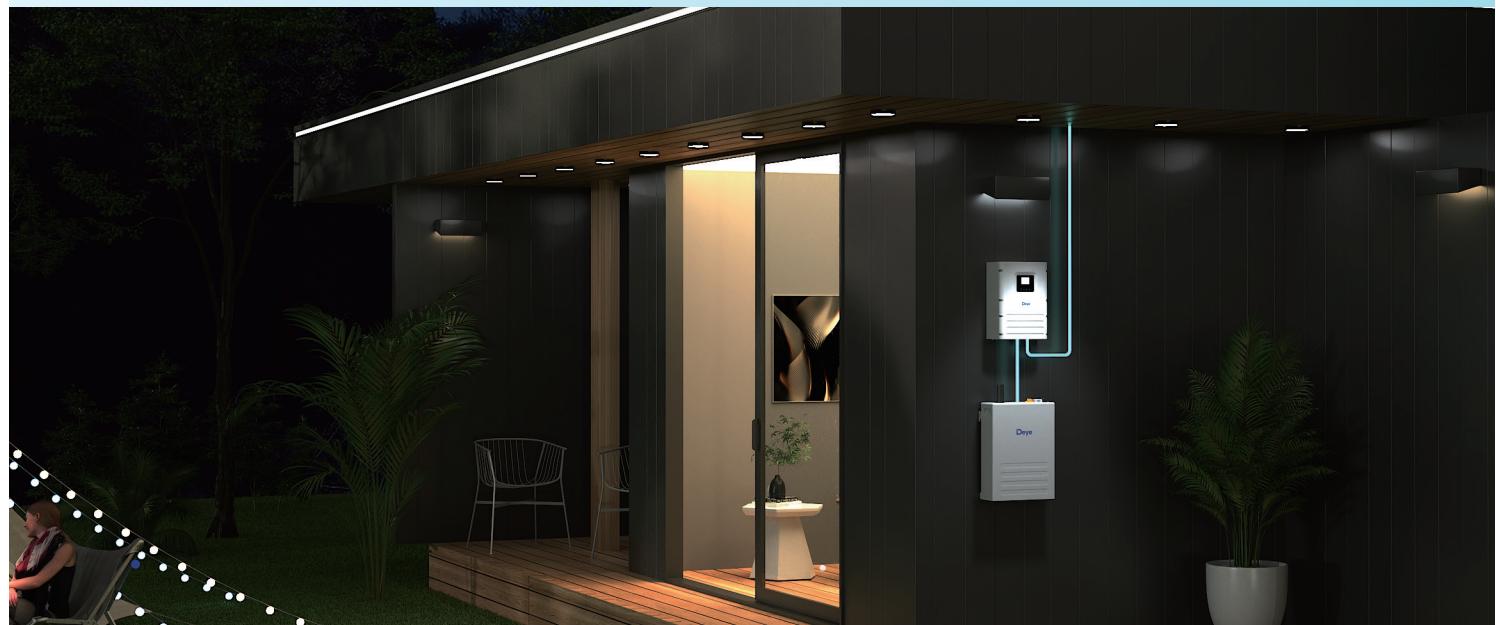

Model

Main Parameters		SE-F5	SE-F5 Plus	SE-F5 Pro
Battery Chemistry			LiFePO ₄	
Capacity			100 Ah	
Scalability ^[1]			Max. 32 pcs in parallel	
Nominal Voltage			51.2 V	
Operating Voltage			44.8 V ~ 57.6 V	
Nominal Energy			5.12 kWh	
Charge Current ^[2]	Max. Continuous		100 A	
	Peak	120 A (10 sec)		150 A (120 sec)
Discharge Current ^[2]	Max. Continuous	120 A		100 A
	Peak	150 A (10 sec)		150 A (120 sec)
Other Parameter				
Recommend Depth of Discharge		80% DoD	90% DoD	90% DoD
Dimension (W × H × D) (Without hanging board)mm		370 × 548 × 140 mm		404 × 547 × 141 mm
Weight Approximate		41 kg		44 kg
LED Indicator		LED (SOC, working, protecting) & Buzzer		
IP Rating of Enclosure		IP21		
Operating Temperature	Charge: 0 ~ 55°C / Discharge: -20 ~ 55°C	Charge: -10 ~ 55°C / Discharge: -20 ~ 55°C	Charge: 0°C ~ 55°C Discharge: -20°C ~ 55°C	
Storage Temperature		0°C ~ 35°C		
Relative Humidity		95% (non-condensing)		
Altitude		≤3000m		
Cycle Life		≥6000(25°C±2°C, 70% EOL)		
Installation	Wall-Mounted, Floor-Mounted, Stack-Mounted			
Communication	CAN2.0, RS485, Bluetooth+APP			CAN2.0, RS485, Optional module, (WiFi+Bluetooth+APP)
Warranty Period ^[3]	5 years	10 years		
Energy Throughput ^[3]	8 MWh	16 MWh		
Certification	UN38.3, MSDS, CE, CB			UN38.3, MSDS, CE, CB, VDE2510-50, CEC

[1] Max. 64 pcs can parallel with CAN-Bridge.

[2] Operating current is affected by temperature and SOC.

[3] Conditions apply, refer to Deye Warranty Letter.

ESS Solution



Model

Main Parameters	SE-F12	SE-F12 Max	SE-F16	SE-F16 Max
Battery Chemistry			LiFePO ₄	
Capacity	230 Ah		314 Ah	
Scalability ^[1]		Max. 32 pcs in parallel		
Nominal Voltage		51.2 V		
Operating Voltage		44.8 V ~ 57.6 V		
Nominal Energy	11.8 kWh		16 kWh	
Charge Current ^[2]	Max. Continuous Peak	230 A 280 A (10 sec)		160 A
Discharge Current ^[2]	Max. Continuous Peak	230 A 280 A (10 sec)		
Other Parameter				
Recommend Depth of Discharge			90% DoD	
Dimension (W × H × D) (Without hanging board)mm	400 × 559 × 233	464 × 767 × 244.5	400 × 708 × 233	464 × 914 × 244.5
Weight Approximate	84 kg	≈93 kg	109 kg	≈118 kg
LED Indicator	LED (SOC, working, protecting) & Buzzer	LCD(SOC, Alarm), LED (Working)	LED (SOC, working, protecting) & Buzzer	LCD(SOC, Alarm), LED (Working)
IP Rating of Enclosure	IP21	IP65	IP21	IP65
Operating Temperature	Charge: 0~55°C (-20~55°C, 12 Max/16 Max with Optional heating)		Discharge: -20~55°C	
Storage Temperature			0°C~35°C	
Relative Humidity			95% (non-condensing)	
Altitude			≤3000m	
Cycle Life			≥6000(25°C±2°C, 70%EOL)	
Installation			Wall-Mounted, Floor-Mounted, Stack-Mounted	
Communication	CAN2.0, RS485, Bluetooth+APP	CAN2.0, RS485, Bluetooth+APP	CAN2.0, RS485, Bluetooth+APP	CAN2.0, RS485, Bluetooth+APP
Warranty Period ^[3]	10 years	10 years	10 years	10 years
Energy Throughput ^[3]	37 MWh	37 MWh	50 MWh	50 MWh
Certification	UN38.3, CE, CB	UN38.3, CE, CB	UN38.3, CE, CB	UN38.3, CE, CB, UL1973, UL9540A, UL9540-DC, FCC

[1] Max. 64 pcs can parallel with CAN-Bridge.

[2] Operating current is affected by temperature and SOC.

[3] Conditions apply, refer to Deye Warranty Letter.

Product comparison

Model	Nominal Energy	Charge / Discharge Rate	DoD	Warranty	Size
SE-F5	5.12kWh, 51.2V, 100Ah	1C/1.2C	80%	5years	370 x 548 x 140 mm
SE-F5 Plus	5.12kWh, 51.2V, 100Ah	1C/1.2C	90%	10years	370 x 548 x 140 mm
SE-F5 Pro	5.12kWh, 51.2V, 100Ah	1C/1C	90%	10years	404 x 547 x 141 mm
SE-F12	11.8kWh, 51.2V, 230Ah	1C/1C	90%	10years	400 x 583 x 233 mm
SE-F12 Max	11.8kWh, 51.2V, 230Ah	1C/1C	90%	10years	464 x 767 x 244.5 mm
SE-F16	16kWh, 51.2V, 314Ah	0.5C/0.7C	90%	10years	400 x 708 x 233 mm
SE-F16 Max	16kWh, 51.2V, 314Ah	0.5C/0.7C	90%	10years	464 x 914 x 244.5 mm

Mounting example

Stacked

Supports 6 layers in parallel (4 layers for SE-F16/F12 Max/F16 Max), allows multiple clusters in parallel



SE-F5 & SE-F5 Plus

SE-F5 Pro

SE-F12

SE-F16

Wall mounted

All support wall mounted installation, and support for multiple packs in parallel



SE-F5 & SE-F5 Plus

SE-F5 Pro

SE-F12

SE-F16

SE-F12 Max

SE-F16 Max

Optional wheels available for SE-F12 & SE-F12 Max & SE-F16 & SE-F16 Max




SE-F12


SE-F16

SE-F12 Max

SE-F16 Max

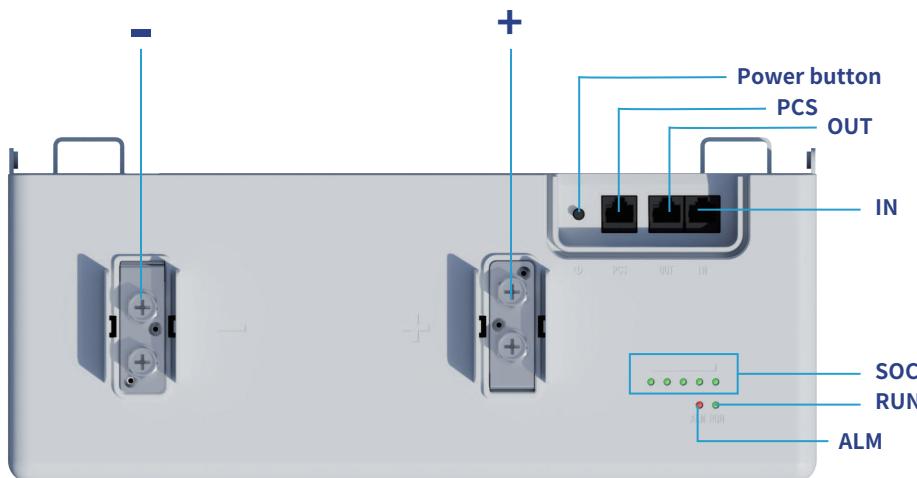


- ◎ -: Battery negative terminal connection position.
- ◎ +: Battery positive terminal connection position.
- ◎ SOC: These 5 LEDs are used to display the pack SOC and charge or discharge state.
- ◎ RUN light: green LED lighting to show the battery running status.
- ◎ ALM light: red LED lighting to show the battery has been alarmed.
- ◎ Power button: Power on or off the control battery.
- ◎ PCS: Inverter communication terminal:(RJ45port) follow the CAN protocol (baud rate:500kbps),and RS485(baud rate:9600bps),used to output battery information to the inverter.
- ◎ OUT: parallel Communication Terminal:(RJ45port) Connect "IN"Terminal of Next battery,for Communication between multiple parallel batteries.
- ◎ IN: parallel Communication Terminal: (RJ45 port) Connect "OUT" Terminal of Previous battery,for Communication between multiple parallel batteries.

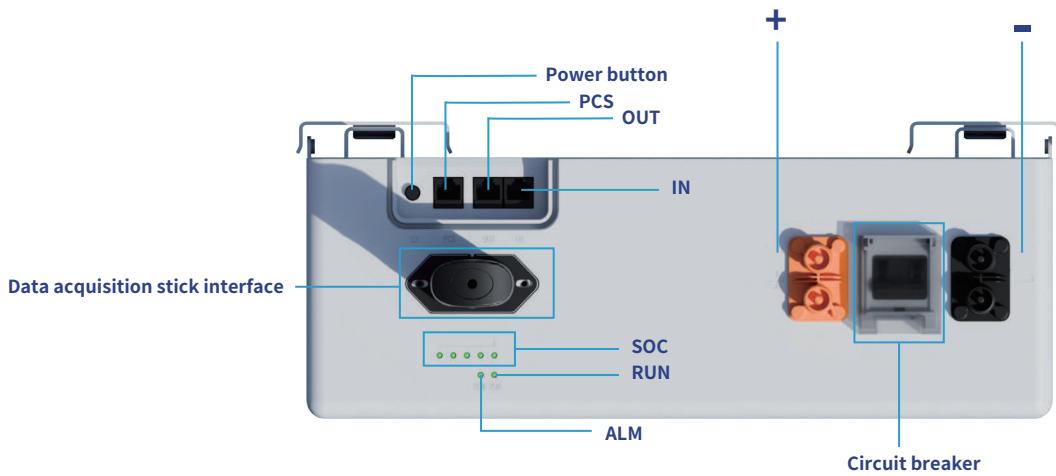

- ◎ -: Battery negative terminal connection position(Quickly plug and unplug).
- ◎ +: Battery positive terminal connection position(Quickly plug and unplug).
- ◎ SOC: These 5 LEDs are used to display the pack SOC and charge or discharge state.
- ◎ RUN light: green LED lighting to show the battery running status.
- ◎ ALM light: red LED lighting to show the battery has been alarmed.
- ◎ Power button: Power on or off the control battery.
- ◎ PCS: Inverter communication terminal:(RJ45port) follow the CAN protocol (baud rate:500kbps),and RS485(baud rate:9600bps),used to output battery information to the inverter.
- ◎ OUT: parallel Communication Terminal:(RJ45port) Connect "IN"Terminal of Next battery,for Communication between multiple parallel batteries.
- ◎ IN: parallel Communication Terminal: (RJ45 port) Connect "OUT" Terminal of Previous battery,for Communication between multiple parallel batteries.
- ◎ Circuit breaker: Used to manually control the connection between the battery rack and external devices.
- ◎ Data acquisition stick interface: The location to connect with your Data Logger that is used for data acquisition via WIFI or Bluetooth.

Without Junction Box(SE-F12 Max & F16 Max)(For EU、AS、AF、LATAM)

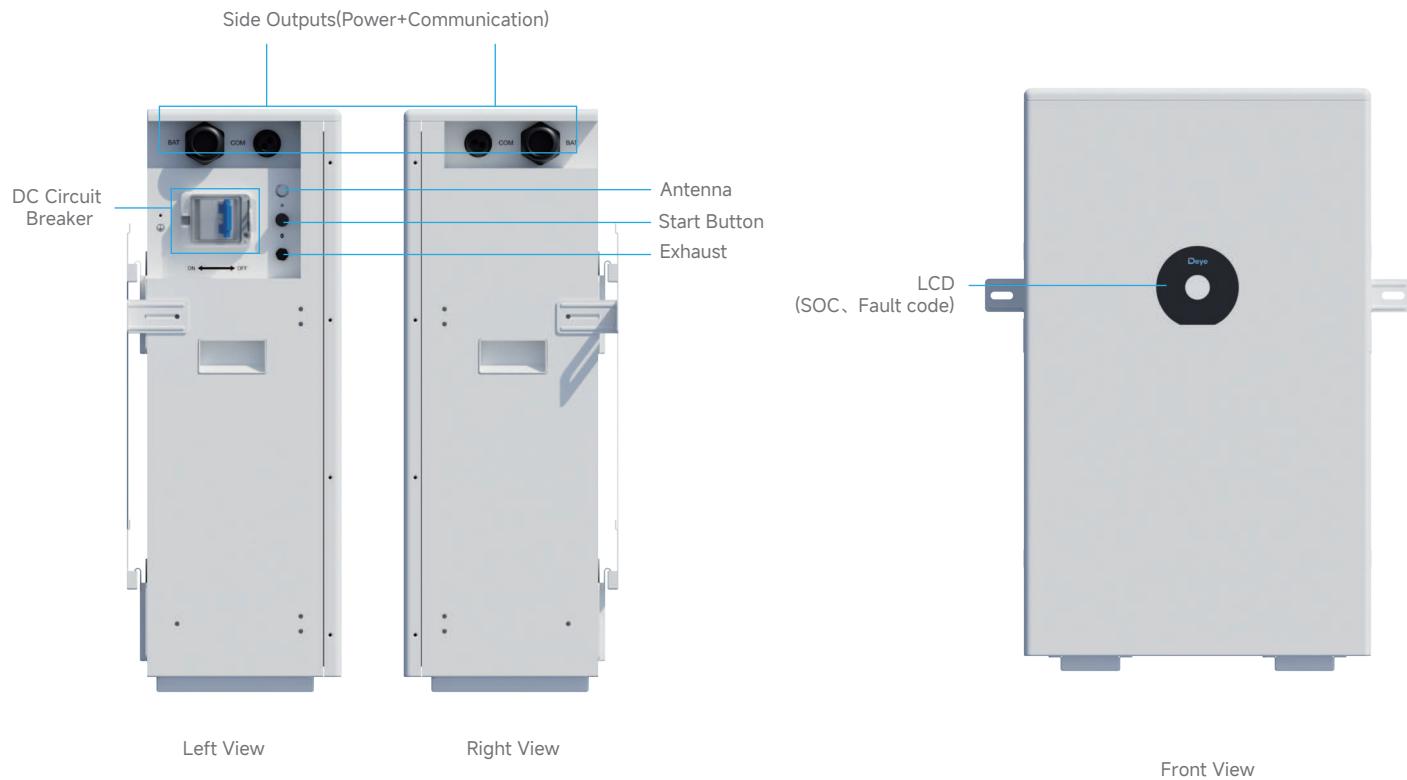


SE-F Series Model Selection and Appearance Reference


Common version



LED strip version

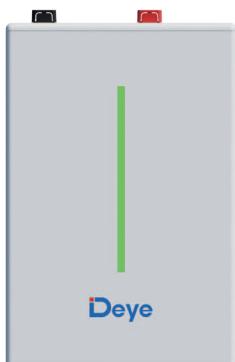

Display screen version

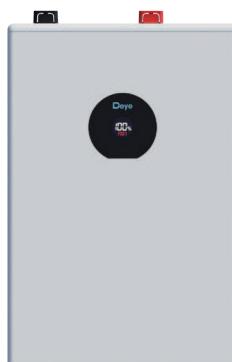

Model	Config Version	Reference
-------	----------------	-----------

SE-F5/F5 Plus/F5 Pro/F12/F16

L



SE-F5/F5 Plus/F5 Pro/F12/F16

E




SE-F5/F5 Plus/F5 Pro/F12/F16/F12 Max/F16 Max

C



Deye Smart Energy Management System(Optional)

The Deye Smart Energy Management System enables seamless control with smart CT, smart plug, smart switch and solar EV charging, ensuring efficiency and full compatibility with Deye inverters.

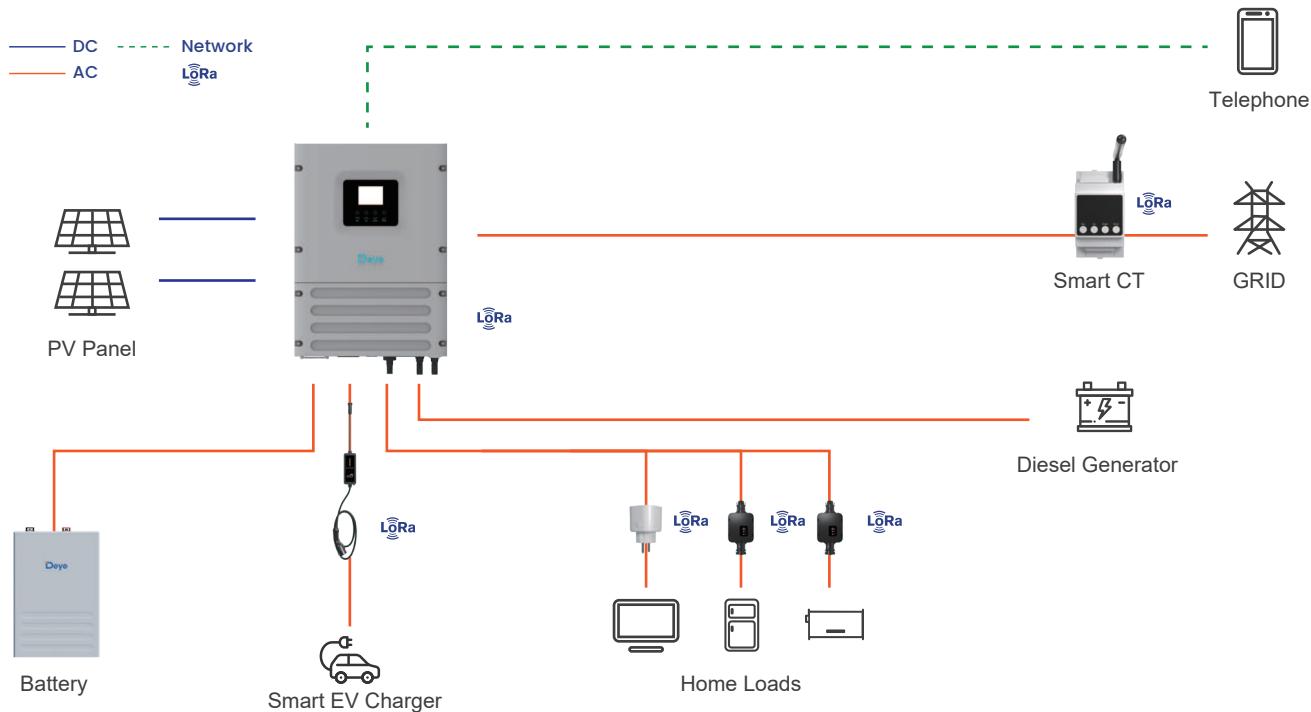

Key Features

● Wireless Zero Export Control

Enables seamless zero export without the need for complex wiring, simplifying installation.

● Intelligent Load Control

Automatically manages loads based on time schedules and battery SOC, optimizing energy distribution.

● Solar-Powered EV Charging

Supports 100% solar charging with dynamic power adjustment for enhanced efficiency and sustainability.

● Full Compatibility

All Deye hybrid inverters can be upgraded to support this system, ensuring seamless integration with existing setups.

● Precise Off-Grid Load Management

Ensures that only non-essential loads are disconnected during off-grid operation, maintaining power supply for critical applications.



Bluetooth APP Monitoring

Low Power (Bluetooth LE)

Automated upgrade

Quick Pairing

No Internet Needed

Portable Control

- Real-time Equipment Monitoring**
- Intelligent Charging/Discharging Strategies**
- AI Data Analytics**
- Customized Maintenance**

Smarten Up Your Home Energy



Download Deye APP to join us!

Embrace a seamless, effortless energy experience that's both ecofriendly and budget-friendly with our intelligent assistant





POWERING YOUR LIFE



www.deyeess.com / www.deyeinverter.com



Deye ESS / Deye New Energy