
BOS-G (NA) Extension

NOTICE: Do contact the after-sales staff at Deye before battery system expansion. Otherwise it will affect the warranty.

1. In-Cluster capacity extension

The solution of customer's original BOS-G system extension along with new BOS-G.

Step 1: Verify the battery serial number (SN). If the manufacturing date difference between the new and old batteries is within one years, capacity extension is allowed.

Step 2: Prior to the extension, ensure the original system is **fully** charged to 100% State of Charge (SOC), and the new battery is also charged to 100% SOC. If fewer than **4 pcs** batteries are being added, use the charger for charging; if **4 pcs or more than 4 pcs batteries** are added, use the inverter for charging. For further details, please contact the after-sales staff at Deye.

Note: a. When charging **4 pcs or more than 4 pcs** BOS-G battery packs to full capacity using an inverter, the high-voltage box will display a SOC of 100% and a current reading of 0A.

b. For single-pack charging procedures, adhere to the BOS-G battery pack charging manual. If you need to check whether the battery pack of the single package is full charge, the historical data read by the upper computer shall prevail.

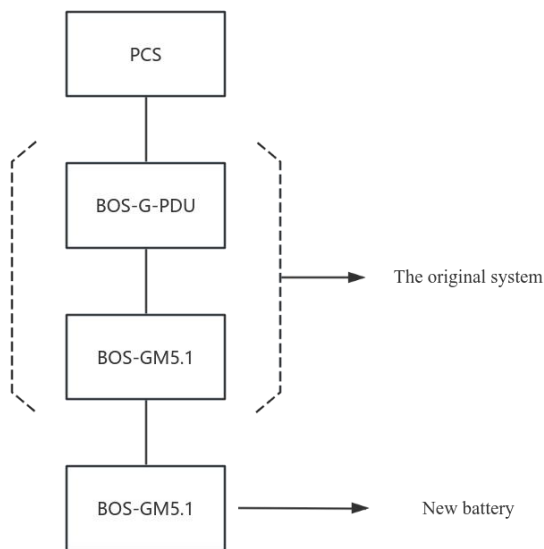


Figure 1 Network diagram

2. Cluster and cluster capacity extension

The solution of customer's original BOS-G system extension along with new BOS-G cluster.

Step 1: Verify the battery serial number (SN). If the manufacturing date difference between the new and old batteries is within two years, capacity extension is allowed.

Step 2: Update the firmware of the original system and the new system's BOS-G high voltage box to the same version. (Seek assistance from Deye staff for the update.)

Step 3: Charge the original BOS-G system and the new BOS-G system to full capacity, then connect them to the combiner box.

Step 4: Initiate BOS-G BMS 1 (master) first, and subsequently activate BOS-G BMS 2 (slave) once the BMU has been fully recognized.

Step 5: Please attach a terminal resistance to the out port of the last HV box when confronting a parallel communication issue. (The last HV box is BOS-G-PDU(BMS2) as figure 2)

Items to note:

1. Please ensure to purchase the 300A Combiner box manufactured by Deye before proceeding with the extension. (Combiner box material number: 10100802000004)
2. The quantity of batteries under all high-voltage boxes must be kept uniform to maintain an equal voltage level.
3. It is recommended to fully charge the battery cluster that needs expansion separately from the original battery cluster, and then perform the parallel connection.

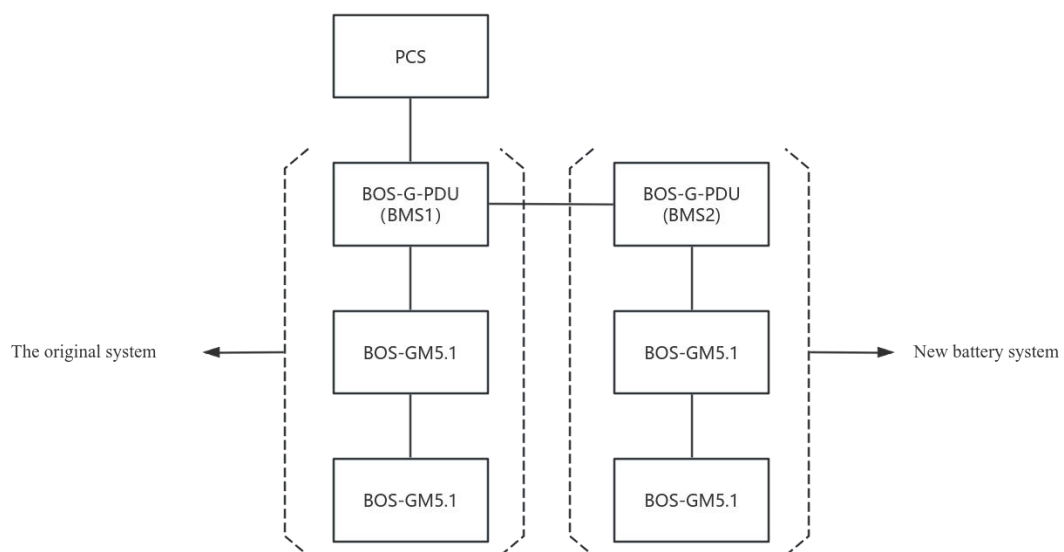


Figure2 Network diagram

3.Operation Guidance For Single BOS-GM5.1Recharge



4.Charging Tools

PN	SN
B+/B+Battery connecting line single PIN	30221105000073
B-/B-Battery connecting line single PIN	30221105000080
Supplementary charging harness UL2426 22AWG black 2-pin	30221105000071
P+ orange terminal connector	30220405000097
P- Black terminal connector	30220405000096
BMS-BMU battery communication line	30221105000070
can analysis box	30314100000041