


# 100KW-2.5MW C&I ESS SOLUTION

Featuring PCS, MPPT, and STS modules with integrated EMS functionality

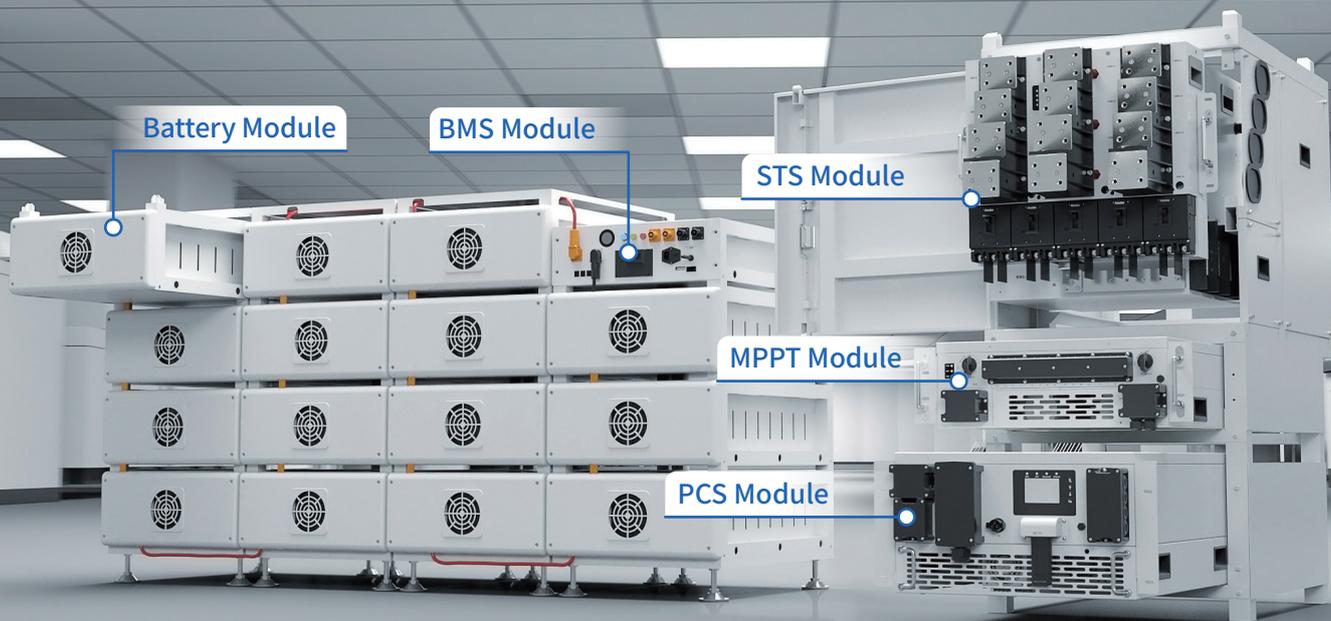

## Fast & Reliable Switching

- **Seamless Switching :**  
STS module can switch between on-grid, off-grid, and diesel modes in <10ms.
- **Independent High-Power Paths :**  
Diesel, load, and grid connections support 500kW.



## Advanced Energy Storage

- **Extended Backup :**  
Up to 32 hours of backup with 16 racks per PCS.
- **Smart Balancing:**  
Independent BMS ensures optimal charge distribution and extends battery life.



## Intelligent Control

- **Integrated EMS :**  
Supports zero-export and time-of-use charging/discharging.
- **Easy Management:**  
Color touchscreen for local or remote cloud adjustments.



## Efficient PV Integration

- **High PV Input :**  
Maximum 200kWp PV module connection with 8 MPPT channels, 40A per MPPT.



## Rugged & Reliable

- **IP65 Protection :**  
PCS and MPPT modules feature IP65-rated protection.
- **Peak Power Support :**  
200% of rated power for 15s.
- **LFP battery:**  
BOS-B's robust design enhances the system's reliability.




## High Performance & Scalability

- **Powerful Capacity :**  
PCS offers 100kW/125kW, expandable up to 2.5MW.
- **Large Energy Storage:**  
BOS-B or BOS-B Pro battery delivers 215/241 kWh per cluster, supporting up to 16 packs per PCS.
- **High Efficiency :**  
PCS reaches 98.5% efficiency, MPPT exceeds 99%.

**STS Module**

Smoothly switch between on-grid, off-grid, and diesel generator modes with a switching time of less than 10ms. Each diesel, load, and grid connection is independent, with each path supporting 500kW. One STS module can connect to five 100kW PCS modules or four 125kW PCS modules.

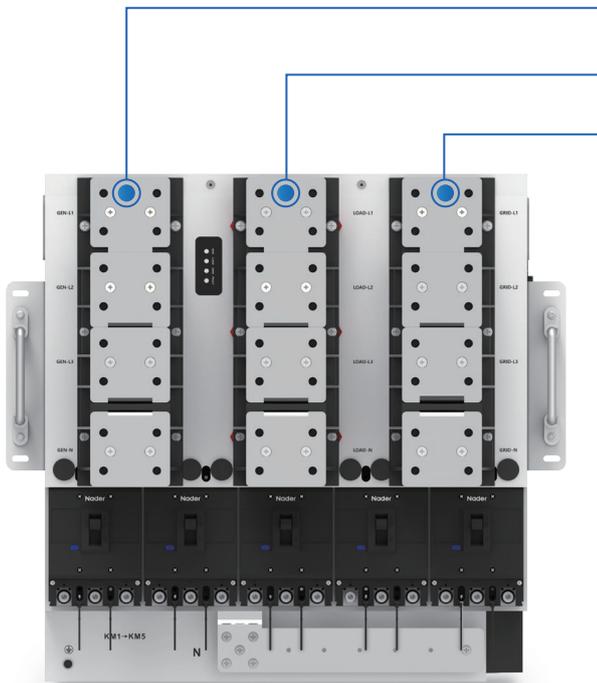

- GEN Port
- Load Port
- Grid Port

**STS Module (500kW)**

- ⊙ Switching capacity of **500kW**.
- ⊙ Enables smooth switching between on-grid, off-grid, and diesel generator modes.
- ⊙ Switching time of less than **10ms**.



- PCS Connection Point
- STS AC Parallel Port

**MPPT Module & PCS Module**

**MPPT Module (8 MPP Trackers)**


- ⊙ Maximum 200kWp PV module connection with 8 MPPT channels, **40A** per MPPT.

**PCS Module (100kW/125kW)**

- ⊙ **175A/200A** charge and discharge current.
- ⊙ Maximum efficiency of **98.5%**.
- ⊙ System rated power up to **2.5MW**.
- ⊙ Supports instantaneous peak power up to 200% of rated power.
- ⊙ Integrates zero-export and time-of-use control functions.
- ⊙ Eliminating the need for additional EMS.

PV Input  
8 MPPT

CAN/RS485

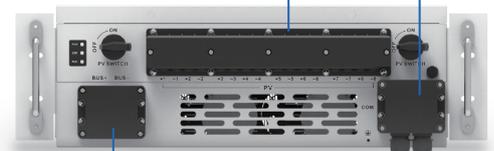

DC Port




Battery Port

CT/Meter/BMS/  
MPPT/Parallel

Data Logger

AC Output


Model	BOS-B-PDU-2
Operating Voltage	200~1000Vdc
Nominal Charge/Discharge Current	168A
Operating Temperature	-20~60°C
Ingress Protection	IP20
AC Input Rating	220±10%VAC/2A
Details	788.6×526×167.2(W×D×H),32kg

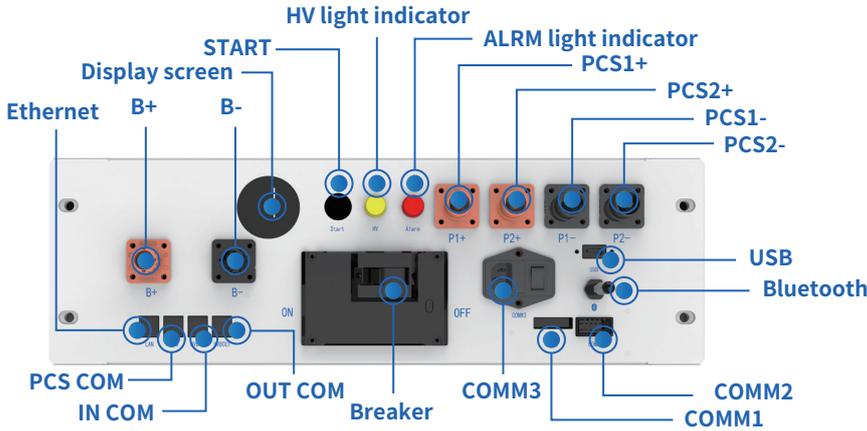

- ◎ COMM3: The product must be connected to the auxiliary power input AC200~240V-3A-50~60Hz when used.
- ◎ COMM1: Emergency power-off triggered the interface.
- ◎ COMM2: Communicative connection with the first battery module; and providing 12VDC power for the first battery module.
- ◎ Bluetooth: The mobile APP connects to the data acquisition rod of the energy storage system.
- ◎ B+: Battery common positive connection position (orange).
- ◎ B-: Battery common negative connection position (black).
- Display screen: Display SOC and fault codes.
- START: A start switch of 12VDC power inside the high-voltage control box.
- ◎ HV light indicator: High-voltage hazard indicator (yellow).
- ALRM light indicator: Battery system fault alarm indicator (red).
- ◎ PCS1+: First PCS positive connection position (orange).
- ◎ PCS2+: Second PCS positive terminal connection position (orange).
- ◎ PCS1-: First PCS negative connection position (black).
- ◎ PCS2-: Second PCS negative connection position (black).
- ◎ USB: BMS upgrade port and storage expansion port.

- ◎ Ethernet: Features not yet developed.
- ◎ PCS COM: PCS COM battery communication terminal: used to output battery information to the inverter.
- ◎ IN COM: Connection position with previous BOS-B-PDU-2 communication OUT COM.
- ◎ OUT COM: Connection position with next BOS-B-PDU-2 communication IN COM.
- ◎ Breaker: It is used to manually control the connection between the battery rack and external devices.

Model	BOS-B-Pack14.3
Nominal Capacity	280Ah
Nominal Energy	14.3kWh
Nominal Voltage	51.2Vdc
Nominal Charge/Discharge Current	168A
Ingress Protection	IP20
Operating Temperature(Charge)	0~55°C
Operating Temperature(Discharge)	-20~55°C
Storage Temperature	0~35°C
Details	795.9×526×274.2(W×D×H),123kg

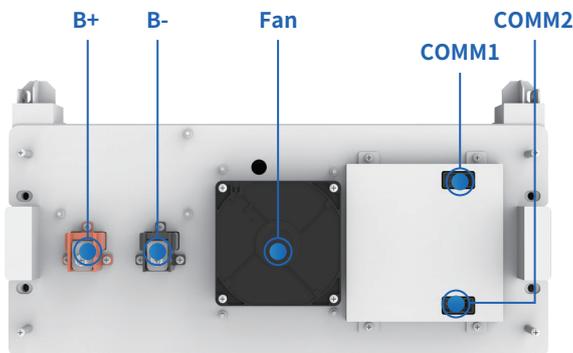

- ◎ B+: Battery module positive pole (orange)
- ◎ B-: Battery module negative pole (black)
- ◎ Fan: Ventilation and heat dissipation.
- ◎ COMM1: Connection position of battery module communication and power supply input
- ◎ COMM2: Connection position of battery module communication and power supply output

MPPT Module	SUN-MPPT-L01-EU-AM8
-------------	---------------------

PV String Input Data	
----------------------	--

Max. PV Input Power (kW)	200
Max. PV Input Voltage (V)	800
Start-up Voltage (V)	200
MPPT Voltage Range (V)	180-750
Full Load MPPT Voltage Range (V)	450-750
Rated PV Input Voltage (V)	600
Max. Operating PV Input Current (A)	40+40+40+40+40+40+40+40
Max. Input Short-Circuit Current (A)	60+60+60+60+60+60+60+60
No. of MPP Trackers	8

Efficiency	
------------	--

Max. Efficiency	>99%
MPPT Efficiency	>99.9%

Equipment Protection	
----------------------	--

DC input reverse protection	YES
DC ARC protection	Optional
Anti-PID(Potential Induced Degradation)	Optional
DC Switch	YES
Surge Protection Level	TYPE II

General Data	
--------------	--

Ingress Protection(IP) Rating	IP65
Over Voltage Category	OVC II
Cabinet Size[W×H×D] (mm)	543x198x700
Weight (kg)	41.75
Type Of Cooling	Intelligent air cooling
Safety EMC/Standard	IEC/EN 62109-1

DC Output Data	
----------------	--

DC Output Voltage Range(V)	630-1000
Max. DC Output Current(A)	200

STS Module	SUN-ST5500L
------------	-------------

Grid/PCS Side Data	
--------------------	--

Rated AC Input/Output Active Power (kW)	500
Rated AC Input/Output Current (A)	758/725
Rated Input/Output Voltage(V)	220/380, 230/400 (three phase)
Grid Connection Form	3L/N/PE
Rated Input/Output Grid Frequency	50Hz/60Hz

Load Side Data	
----------------	--

Rated Output Active Power (kW)	500
Rated Output Current (A)	758/725
Rated Output Voltage(V)	220/380, 230/400 (three phase)
Grid Connection Form	3L/N/PE
Rated Output Grid Frequency	50Hz/60Hz

GEN Side Data	
---------------	--

Rated AC Input Active Power (kW)	500
Rated AC Input Current (A)	758/725
Rated Input Voltage(V)	220/380, 230/400 (three phase)
Grid Connection Form	3L/N/PE
Rated Input Grid Frequency	50Hz/60Hz

General Data	
--------------	--

Off grid switching time	<10ms
Ingress Protection(IP) Rating	IP20
Over Voltage category	OVC III

Cabinet Size[W×H×D] (mm)	543x575x671
Weight (kg)	108
Type Of Cooling	Natural Cooling
Safety EMC/Standard	IEC/EN 61439-1/-2

PCS Model	SUN-100K-PCS01HP3	SUN-125K-PCS01HP3
-----------	-------------------	-------------------

Battery Data		
Battery Type	Lithium-ion	
Battery Voltage Range (V)	630-1000	
Max. Charging Current (A)	175	200
Max. Discharging Current (A)	175	200
Charging Strategy for Li-ion Battery	Self-adaption to BMS	
Number of Battery Input	1	

DC Input Data		
DC Input Voltage Range(V)	630-1000	630-1000
Max. DC Input Current(A)	200	200

AC Input/Output Data		
Rated AC Input/Output Active Power (kW)	100	125
Max. AC Input/Output Apparent Power (kVA)	110	125
Rated AC Input/Output Current (A)	151.6/145	189.4/181.2
Max. AC Input/Output Current (A)	166.7/159.5	189.4/181.2
Rated Input/Output Voltage/Range(V)	220/380, 230/400 0.85Un-1.1Un	
Grid Connection Form	3L+N+PE	
Rated Input/Output Grid Frequency/Range	50Hz/45Hz-55Hz 60Hz/55Hz-65Hz	
Power Factor Adjustment Range	-1~1	
Total Current Harmonic Distortion THDi	<3% (of nominal power)	
DC Injection Current	<0.5% In	

Efficiency		
Max. Efficiency	98.5%	
Euro Efficiency	97.8%	
MPPT Efficiency	>99%	

Equipment Protection		
Integrated	AC Output Overcurrent Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection, Anti-islanding Protection, Insulation Impedance Detection, Residual Current Detection	
Surge Protection Level	TYPE II(DC), TYPE II(AC)	

Interface		
LCD/LED display	LCD	
Communication Interface	WIFI, RS485, CAN, Meter	

General Data		
Operating Temperature Range(°C)	-40°C-60°C, >45°C Derating	
Permissible Ambient Humidity	0-95%	
Permissible Altitude	4000m	
Noise	<75dB	
Ingress Protection(IP) Rating	IP 65(PCS Module)	
Cabinet Size[W×H×D] (mm)	543x310x775	
Weight (kg)	70.35	
Inverter Topology	Non-Isolated	
Over Voltage Category	OVC II(DC), OVC III(AC)	
Type of Cooling	Intelligent Air Cooling	
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy	
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105	
Safety/EMC Standard	IEC/EN 62477-1	



<b>Model</b>	<b>BOS-B</b>
--------------	--------------

<b>Main Parameter</b>	
-----------------------	--


Battery Module Energy ( kWh )	14.3
Battery Module Nominal Voltage ( V )	51.2
Battery Module Capacity ( Ah )	280
Module Weight Approximate ( kg )	123
Battery Module Qty In Series ( Optional )	15
Matching Mode	PCS PCS+MPPT 14-15 units for PCS on-grid applications, 15 units for PCS off-grid applications 15 units (on/off-grid) for MPPT Open-Circuit Voltage $\leq$ 750V 14 units (on-grid) for MPPT Open-Circuit Voltage $\leq$ 700V
System Nominal Voltage ( V )	768
System Energy ( kWh )	214.5
System Usable Energy ( kWh )	193.05
Max.Charge/Discharge Current ( A )	168

<b>Other Parameter</b>	
------------------------	--


Operating Temperature ( °C )	discharge : -20 ~ 55      charge : 0 ~ 55
Storage Temperature ( °C )	0 ~ 35
Thermal Management	Smart fan cooling
LCD Display	SOC / Fault Code
Status Indicator	Yellow : Battery High Voltage Power On    Red : Battery System Alarm
Communication Port	TCP / RS485 / CAN
Communication With BMS	CAN
Humidity	5% ~ 85%
Altitude	$\leq$ 3000m
IP Rating of Enclosure	IP20
Noise ( dB )	TBD
System Dimension ( W × H × D, mm )	2150 × 1136 × 800
System Weight Approximate ( kg )	1944
Installation Location	Rack Mounted
Recommend Depth of Discharge	90%
Cycle Life	25±2°C, 0.5C / 0.5C, EOL70% $\geq$ 6000
Warranty Period	10 years
Certification	CE / IEC62619 / IEC62040 / UN38.3

Typical Application Scenarios


One PCS can support up to 16 racks of batteries in parallel

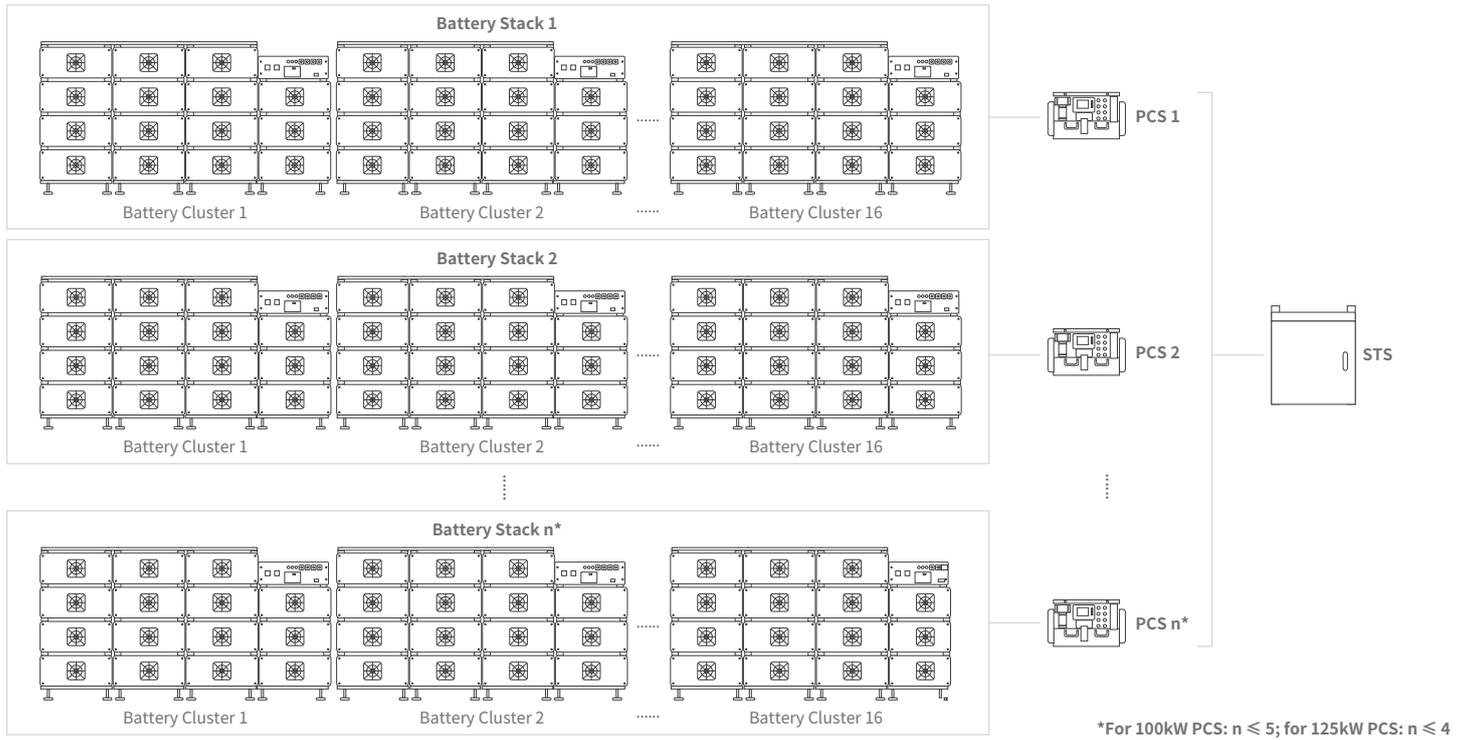

One STS module can connect to five 100kW PCS modules or four 125kW PCS modules for parallel operation

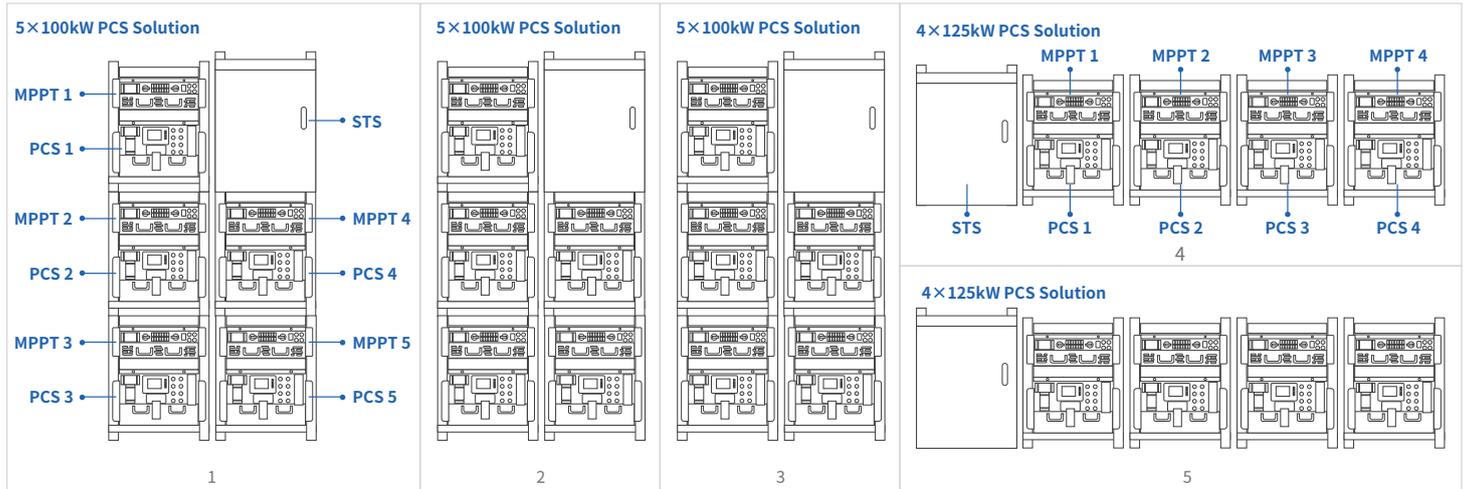

Five STS modules can provide parallel support for twenty-five 100kW PCS modules or twenty 125kW PCS modules, forming a 2.5MW system.

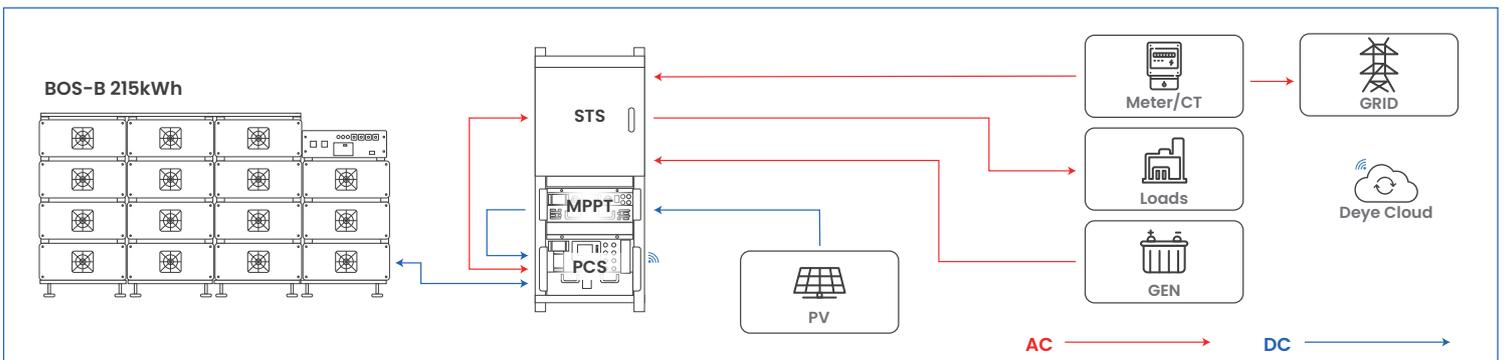


# Deye Cloud

## All-in-one Energy & Device Management Platform

- Unlock significant savings
- Individual Add-on for dynamic tariff
- Intelligent charging/discharging strategies
- Tailored solution to deye devices
- Real-time equipment monitoring
- Best energy scheduling solutions by Deye Copilot
- 24/7 AI Assistant support


Switch flexibly between autonomous and manual control

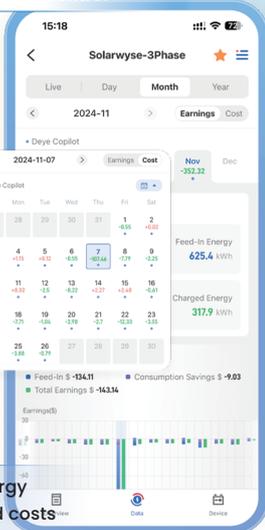

Display energy savings and costs



Support dynamic tariff and flat-rate

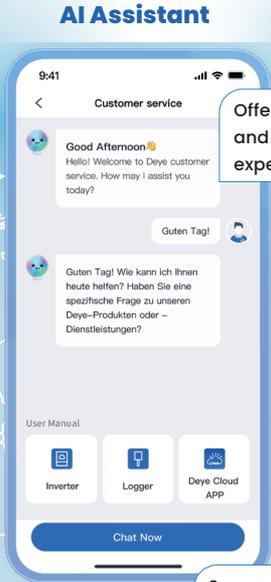

Offer response suggestions and personalized support experience

Support over 30 languages

Analyze dynamic pricing, predict power load and PV generation to optimize energy dispatch and minimize electricity costs



## Smarten Up Your Energy Storage System

Download Deye Cloud APP to join us!  
Embrace a seamless, effortless energy experience that's both eco-friendly and budget-friendly with our intelligent assistant



- APP & Web**  
Manage your energy effortlessly
- Cloud-edge Collaboration**  
Faster and more efficient
- Accelerated Connection**  
Optimized for speed and performance
- Localized Data Centers**  
Ensure data sovereignty and compliance in EU & US
- Deye Copilot**  
AI-powered energy analysis and control
- AI Assistant**  
24/7 support, fast, efficient, in your language