



POWERING YOUR LIFE



3.6kW~12kW/5~50kWh All-In-One
Single/Three Phase Energy Storage & Charging Solution

AI-W5.1-B-ESS (SPRING SERIES)



All-in-One

Hybrid inverter and LFP battery in one sleek system



Smarter Energy Use

Peak-shaving, smart load, AC coupling, time of use



Scalable Capacity

Modular design expandable from 5 kWh to 50 kWh



Uninterrupted Supply

4 ms seamless switchover from grid to back-up for energy security



Effortless Installation

Tool-free stacking for quick and easy installation



Smart Control

Convenient management via App, PC, or touch display

www.deyeess.com / www.deyeinverter.com



Deye ESS / Deye New Energy

ALL-IN-ONE POWER, READY IN MINUTES

6-in-One, Smart Integrated Design



- 


3.6-12kW
Single/Three-Phase Inverter
- 

5-50kWh
Flexible System Capacity
- 

Tool-Free
Stacking Installation
- 

One-Click
System Setup
- 

Gateway & DC Bus
Built-in

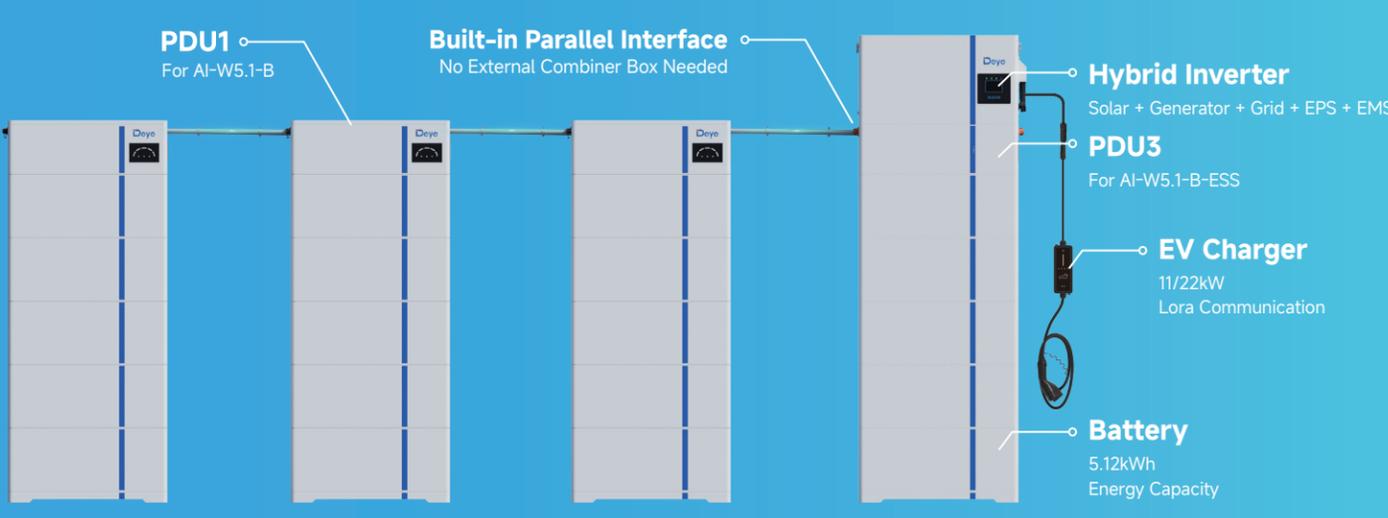

Scalable Energy for Every Need



| | | | | | |
|-------------------------------|---------|----------|----------|----------|---------|
| Hybrid Inverter + PDU3 + Base | x1 | x1 | x1 | x1 | x1 |
| Battery | x1 | x2 | x3 | x4 | x5 |
| Energy Capacity | 5.12kWh | 10.24kWh | 15.36kWh | 20.48kWh | 25.6kWh |



| | | | | | | |
|-----------------|---------|----------|----------|----------|---------|----------|
| PDU1 + Base | x1 | x1 | x1 | x1 | x1 | x1 |
| Battery | x1 | x2 | x3 | x4 | x5 | x6 |
| Energy Capacity | 5.12kWh | 10.24kWh | 15.36kWh | 20.48kWh | 25.6kWh | 30.72kWh |

Power Distribution Unit




Model: [AI-W5.1-PDU1-B](#)
 Application: For [AI-W5.1-B](#), supporting inter-cluster capacity expansion and parallel operation
 Details: 720 × 254 × 239.8 (W × D × H, mm) , 18.5kg
 Built-in Circuit Breaker: Two-pole Molded Case, 250A, 1000V



Model: [AI-W5.1-PDU3-B](#)
 Application: For [AI-W5.1-B-ESS](#), supporting inter-cluster capacity expansion and parallel operation
 Details: 720 × 254 × 239.8 (W × D × H, mm) , 18.5kg
 Built-in Circuit Breaker: Two-pole Molded Case, 250A, 1000V

Typical Scenario

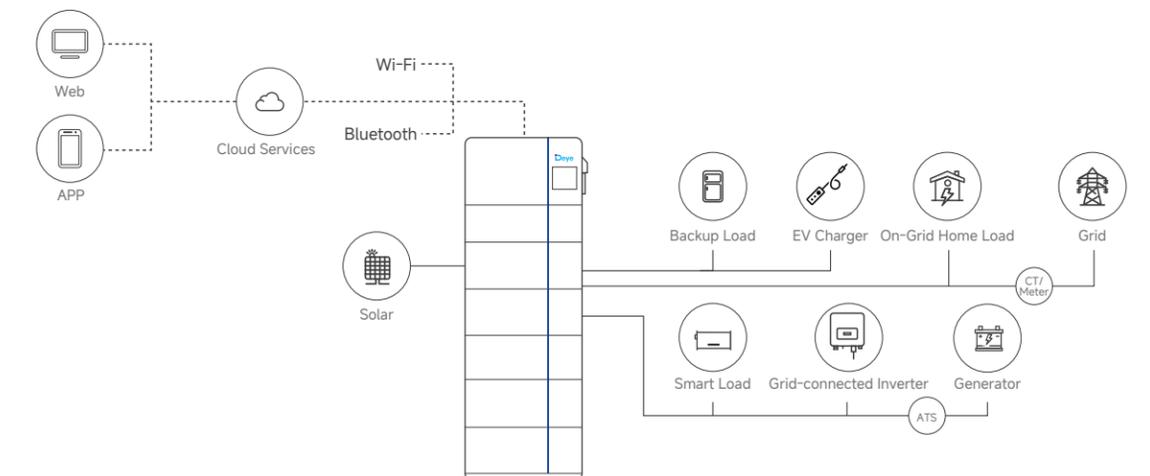

Deye Hybrid Inverter

3.6-10 kW Single-Phase | 5-12 kW Three-Phase
5-50kWh System

3.6kW~12kW/5~50kWh Energy Storage System



4 ms ultra-fast grid to back-up power switching time



2x rated power for 10 seconds



Quick and simple setup



Smart **EMS** with **real-time** monitoring



One-click diagnostics via Deye Cloud



IP65 protection for reliable outdoor performance



1 x PDU1 + 5 x Battery + 1 x Base



1 x Inverter + 1 x PDU3 + 5 x Battery + 1 x Base

| Model (Single-phase) | AI-W5.1-3.6P1-EU-B | AI-W5.1-5P1-EU-B | AI-W5.1-6P1-EU-B | AI-W5.1-7P1-EU-B | AI-W5.1-7.6P1-EU-B | AI-W5.1-8P1-EU-B | AI-W5.1-10P1-EU-B |
|--|--|------------------|------------------|------------------|--------------------|------------------|-------------------|
| Battery Input Data | | | | | | | |
| Battery Type | Lithium-ion | | | | | | |
| Battery Voltage | 40-60 | | | | | | |
| Max. Charging Current(A) | 90 | 120 | 135 | 175 | 190 | 190 | 210 |
| Max. Discharging Current(A) | 90 | 120 | 135 | 175 | 190 | 190 | 210 |
| Charging Strategy for Li-Ion Battery | Self-adaption to BMS | | | | | | |
| Number of Battery Input | 1 | | | | | | |
| PV String Input Data | | | | | | | |
| Max. PV access power(W) | 7200 | 10000 | 12000 | 14000 | 15200 | 16000 | 20000 |
| Max. PV Input Power(W) | 5760 | 8000 | 9600 | 11200 | 12160 | 12800 | 16000 |
| Max. PV Input Voltage(V) | 500 | | | | | | |
| Start-up Voltage(V) | 125 | | | | | | |
| PV Input Voltage Range(V) | 125-500 | | | | | | |
| MPPT Voltage Range(V) | 150-425 | | | | | | |
| Full Load MPPT Voltage Range(V) | 300-425 | | 200-425 | | | 250-425 | |
| Rated PV Input Voltage(V) | 370 | | | | | | |
| Max. Operating PV Input Current(A) | 18+18 | | | 32+32 | | | |
| Max. Input Short-Circuit Current(A) | 27+27 | | | 48+48 | | | |
| No.of MPPT Trackers/No.of String MPPT Tracker | 2/1+1 | | | 2/2+2 | | | |
| Max. Inverter Backfeed Current to The Array | 0 | | | | | | |
| AC Input/Output Data | | | | | | | |
| Rated AC Input/Output Active Power(W) | 3600 | 5000 | 6000 | 7000 | 7600 | 8000 | 10000 |
| Max. AC Input/Output Apparent Power(VA) | 3960 | 5500 | 6600 | 7700 | 8360 | 8800 | 11000 |
| Peak Power (off-grid)(W) | 2 times of rated power, 10s | | | | | | |
| Rated AC Input/Output Current(A) | 16.4/15.7 | 22.7/21.7 | 27.3/26.1 | 31.9/30.5 | 34.5/33 | 36.4/34.8 | 45.5/43.5 |
| Max. AC Input/Output Current(A) | 18/17.2 | 25/23.9 | 30/28.7 | 35/33.5 | 38/36.3 | 40/38.3 | 50/47.9 |
| Max. Continuous AC Passthrough (grid to load)(A) | 35 | | 40 | 50 | | | |
| Max. Output Fault Current(A) | 36 | 50 | 60 | 70 | 76 | 80 | 100 |
| Max. Output Overcurrent Protection(A) | 80 | | | 140 | | | |
| Rated Input/Output Voltage/Range(V) | 220V/230V 0.85Un-1.1Un | | | | | | |
| Grid Connection Form | L+N+PE | | | | | | |
| Rated Input/Output Grid Frequency/Range | 50Hz/45Hz-55Hz 60Hz/45Hz-65Hz | | | | | | |
| Power Factor Adjustment Range | 0.8 leading-0.8 lagging | | | | | | |
| Total Current Harmonic Distortion THDi | <3% (of nominal power) | | | | | | |
| DC Injection Current | <0.5In | | | | | | |
| Efficiency | | | | | | | |
| Max. Efficiency | 97.60% | | | | | | |
| Euro Efficiency | 96.50% | | | | | | |
| MPPT Efficiency | >99% | | | | | | |
| Equipment Protection | | | | | | | |
| DC Polarity Reverse Connection Protection | Yes | | | | | | |
| AC Output Overcurrent Protection | Yes | | | | | | |
| AC Output Overvoltage Protection | Yes | | | | | | |
| AC Output Short Circuit Protection | Yes | | | | | | |
| Thermal Protection | Yes | | | | | | |
| Arc fault circuit interrupter (AFCI) | Optional | | | | | | |
| Power Network Monitoring | Yes | | | | | | |
| Island Protection Monitoring | Yes | | | | | | |
| Earth Fault Detection | Yes | | | | | | |
| DC Input Switch | Yes | | | | | | |
| Overvoltage Load Drop Protection | Yes | | | | | | |
| Residual Current (RCD) Detection | Yes | | | | | | |
| Anti-islanding Protection | Yes(Active Frequency Shift) | | | | | | |
| Surge Protection Level | TYPE II(DC), TYPE II(AC) | | | | | | |
| Interface | | | | | | | |
| Display | LCD+LED | | | | | | |
| Communication Interface | RS232, RS485, CAN | | | | | | |
| Monitor Mode | GPRS/WIFI/Bluetooth/4G/LAN (optional) | | | | | | |
| PV Connection | VP-D4 | | | | | | |
| General Data | | | | | | | |
| Operating Temperature Range | -40 to +60°C, >45°C Derating | | | | | | |
| Permissible Ambient Humidity | 0-100% | | | | | | |
| Permissible Altitude | 2000m | | | | | | |
| Noise | <30 dB(A) | | | | | | |
| Ingress Protection(IP) Rating | IP 65 | | | | | | |
| Inverter Topology | Non-Isolated | | | | | | |
| Over Voltage Category | OVC II(DC), OVC III(AC) | | | | | | |
| Cabinet size(W*H*D) [mm] | 720W×399.2H×256D (Excluding connectors and brackets) | | | | | | |
| Weight(kg) | 31.6 | | | | | | |
| Warranty | 5Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy | | | | | | |
| Type of Cooling | Intelligent Air Cooling | | | | | | |
| Grid Regulation | IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105 | | | | | | |
| Safety EMC/Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | | | |

| Model (Three-phase) | AI-W5.1-5P3-EU-B | AI-W5.1-6P3-EU-B | AI-W5.1-8P3-EU-B | AI-W5.1-10P3-EU-B | AI-W5.1-12P3-EU-B |
|--|--|------------------|------------------|-------------------|-------------------|
| Battery Input Data | | | | | |
| Battery Type | Lithium-ion | | | | |
| Battery Voltage | 40-60 | | | | |
| Max. Charging Current(A) | 120 | 130 | 190 | 210 | 240 |
| Max. Discharging Current(A) | 120 | 130 | 190 | 210 | 240 |
| Charging Strategy for Li-Ion Battery | Self-adaption to BMS | | | | |
| Number of Battery Input | 1 | | | | |
| PV String Input Data | | | | | |
| Max. PV access power(W) | 10000 | 12000 | 16000 | 20000 | 24000 |
| Max. PV Input Power(W) | 8000 | 9600 | 12800 | 16000 | 19200 |
| Max. PV Input Voltage(V) | 800 | | | | |
| Start-up Voltage(V) | 160 | | | | |
| PV Input Voltage Range(V) | 160-800 | | | | |
| MPPT Voltage Range(V) | 200-650 | | | | |
| Full Load MPPT Voltage Range(V) | 350-650 | | | | |
| Rated PV Input Voltage(V) | 550 | | | | |
| Max. Operating PV Input Current(A) | 20+20 | | 36+20 | | |
| Max. Input Short-Circuit Current(A) | 30+30 | | 54+30 | | |
| No.of MPPT Trackers/No.of String MPPT Tracker | 2/1+1 | | 2/2+1 | | |
| Max. Inverter Backfeed Current to The Array | 0 | | | | |
| AC Input/Output Data | | | | | |
| Rated AC Input/Output Active Power(W) | 5000 | 6000 | 8000 | 10000 | 12000 |
| Max. AC Input/Output Apparent Power(VA) | 5500 | 6600 | 8800 | 11000 | 13200 |
| Peak Power (off-grid)(W) | 2 times of rated power, 10s | | | | |
| Rated AC Input/Output Current(A) | 7.6/7.2 | 9.1/8.7 | 12.1/11.6 | 15.2/14.5 | 18.2/17.4 |
| Max. AC Input/Output Current(A) | 8.4/8 | 10/9.6 | 13.4/12.8 | 16.7/15.9 | 20/19.1 |
| Max. Continuous AC Passthrough (grid to load)(A) | 45 | | | | |
| Max. Output Fault Current(A) | 16.8 | 20 | 26.8 | 33.4 | 40 |
| Max. Output Overcurrent Protection(A) | 70 | | | | |
| Rated Input/Output Voltage/Range(V) | 220/380V, 230/400V 0.85Un-1.1Un | | | | |
| Grid Connection Form | 3L+N+PE | | | | |
| Rated Input/Output Grid Frequency/Range | 50Hz/45Hz-55Hz 60Hz/55Hz-65Hz | | | | |
| Power Factor Adjustment Range | 0.8 leading-0.8 lagging | | | | |
| Total Current Harmonic Distortion THDi | <3% (of nominal power) | | | | |
| DC Injection Current | <0.5In | | | | |
| Efficiency | | | | | |
| Max. Efficiency | 97.6% | | | | |
| Euro Efficiency | 97.0% | | | | |
| MPPT Efficiency | >99% | | | | |
| Equipment Protection | | | | | |
| DC Polarity Reverse Connection Protection | Yes | | | | |
| AC Output Overcurrent Protection | Yes | | | | |
| AC Output Overvoltage Protection | Yes | | | | |
| AC Output Short Circuit Protection | Yes | | | | |
| Thermal Protection | Yes | | | | |
| Arc fault circuit interrupter (AFCI) | Optional | | | | |
| Power Network Monitoring | Yes | | | | |
| Island Protection Monitoring | Yes | | | | |
| Earth Fault Detection | Yes | | | | |
| DC Input Switch | Yes | | | | |
| Overvoltage Load Drop Protection | Yes | | | | |
| Residual Current (RCD) Detection | Yes | | | | |
| Anti-islanding Protection | Yes(Active Frequency Shift) | | | | |
| Surge Protection Level | TYPE II(DC), TYPE II(AC) | | | | |
| Interface | | | | | |
| Display | LCD+LED | | | | |
| Communication Interface | RS232, RS485, CAN | | | | |
| Monitor Mode | GPRS/WIFI/Bluetooth/4G/LAN (optional) | | | | |
| PV Connection | VP-D4 | | | | |
| General Data | | | | | |
| Operating Temperature Range | -40 to +60°C, >45°C Derating | | | | |
| Permissible Ambient Humidity | 0-100% | | | | |
| Permissible Altitude | 2000m | | | | |
| Noise | ≤ 55 dB | | | | |
| Ingress Protection(IP) Rating | IP 65 | | | | |
| Inverter Topology | Non-Isolated | | | | |
| Over Voltage Category | OVC II(DC), OVC III(AC) | | | | |
| Protection Level | Class I | | | | |
| Cabinet size(W*H*D) [mm] | 720W×460.5H×254D (Excluding connectors and brackets) | | | | |
| Weight(kg) | 44 | | | | |
| Warranty | 5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy | | | | |
| Type of Cooling | Intelligent Air Cooling | | | | |
| Grid Regulation | IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105 | | | | |
| Safety EMC/Standard | IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2 | | | | |

Deye AI-W5.1-B Battery

5.12kWh | LFP | Stacked Battery Module
5.12kWh~30.72kWh Per Stack

Highly **scalable** and **flexible** capacity

Intelligent **BMS** for safety and longer lifespan

Real-time battery monitoring via Deye Cloud

Auto-networking and remote firmware upgrades

Wide operating temperature range with natural cooling

IP65 protection for reliable outdoor performance

100% DOD
Maximises subsidies at lower cost

Built-in **Parallel Interface**
No External Combiner Box Needed

Stacked Battery (LV)

| Model | AI-W5.1-B | |
|---|---|-----|
| Main Parameter | | |
| Battery Chemistry | LiFePO4 | |
| Built-in Circuit Breaker | 125A 2P, 60Vdc | |
| Nominal Energy (kWh) | 5.12 | |
| Usable Energy (kWh) ^[1] | 4.6 | |
| Capacity (Ah) | 100 | |
| Nominal Voltage (V) | 51.2 | |
| Operating Voltage(V) | 44.8~57.6 | |
| Rated DC Power (kW) | 2.5 | |
| Charge/Discharge Current (A) ^[2] | Recommend | 50 |
| | Max. | 100 |
| | Peak(10s,25°C) | 150 |
| Other Parameter | | |
| Recommend Depth of Discharge | 90% | |
| Battery Dimension (W/D/H, mm) | 720*255*300 (without terminal parts) | |
| Battery Weight (kg) | 53 | |
| Master LED Indicator | Battery module: 3LED (working, alarming, protecting), PDU module: 5LED(SOC:20%~ 100%)&3LED (working, alarming, protecting) | |
| Operating Temperature | Charge: 0~55°C (-20°C~55°C optional heating) / Discharge: -20°C~55°C | |
| Storage Temperature | 0°C ~ 35°C | |
| IP Rating of Enclosure | IP65 (after stacking) | |
| Humidity | 5%~95%, non-condensing | |
| Altitude | ≤3000m | |
| Installation | Floor-Mounted | |
| Communication Port | CAN2.0, RS485 | |
| Cycle Life | ≥6000(25°C±2°C ,0.5C/0.5C,70%EOL) | |
| Energy Throughput | 16MWh(Battery Module @70%EOL) | |
| Warranty Period ^[3] | 10 years | |
| Certification | UN38 .3, IEC62619, CE, UK, VDE2510-50, CEI0-21,CE-LVD, CEC, FCC, UL1973, UL9540A | |

Parallel expansion

| | 1 | 2 | 3 | 4 | 5 | 6 |
|---|-------------|-------------|---------------|---------------|---------------|---------------|
| Battery Pack Quantity | 1 | 2 | 3 | 4 | 5 | 6 |
| System Usable Energy (kWh) [1] | 4.6 | 9.2 | 13.8 | 18.4 | 23 | 27.6 |
| System Recommend Charge/Discharge Current (A) | 50 | 100 | 150 | 200 | 250 | 250 |
| System Max. Charge/Discharge Current (A) [2] | 100 | 200 | 250 | 250 | 250 | 250 |
| System Rated DC Power (kW) | 2.5 | 5 | 7.5 | 10 | 12 | 12 |
| System Dimension (W/D/H, mm) (With PDU, Base) | 720*255*569 | 720*255*850 | 720*255* 1131 | 720*255* 1412 | 720*255* 1693 | 720*255* 1974 |
| System Weight (kg) (With PDU, Base) | 74.5 | 127.5 | 180.5 | 233.5 | 286.5 | 339.5 |

[1]DC Usable Energy, test conditions: 90%DOD, 0.5C charge & discharge at 25°C . System usable energy may vary due to system configuration parameters.

[2]The current is affected by temperature and SOC.


[3]Conditions apply, refer to Deye Warranty Letter.

[4]Made in China.

DEYE EV CHARGER

11kW Three-Phase

7/22kW Single/Three-Phase

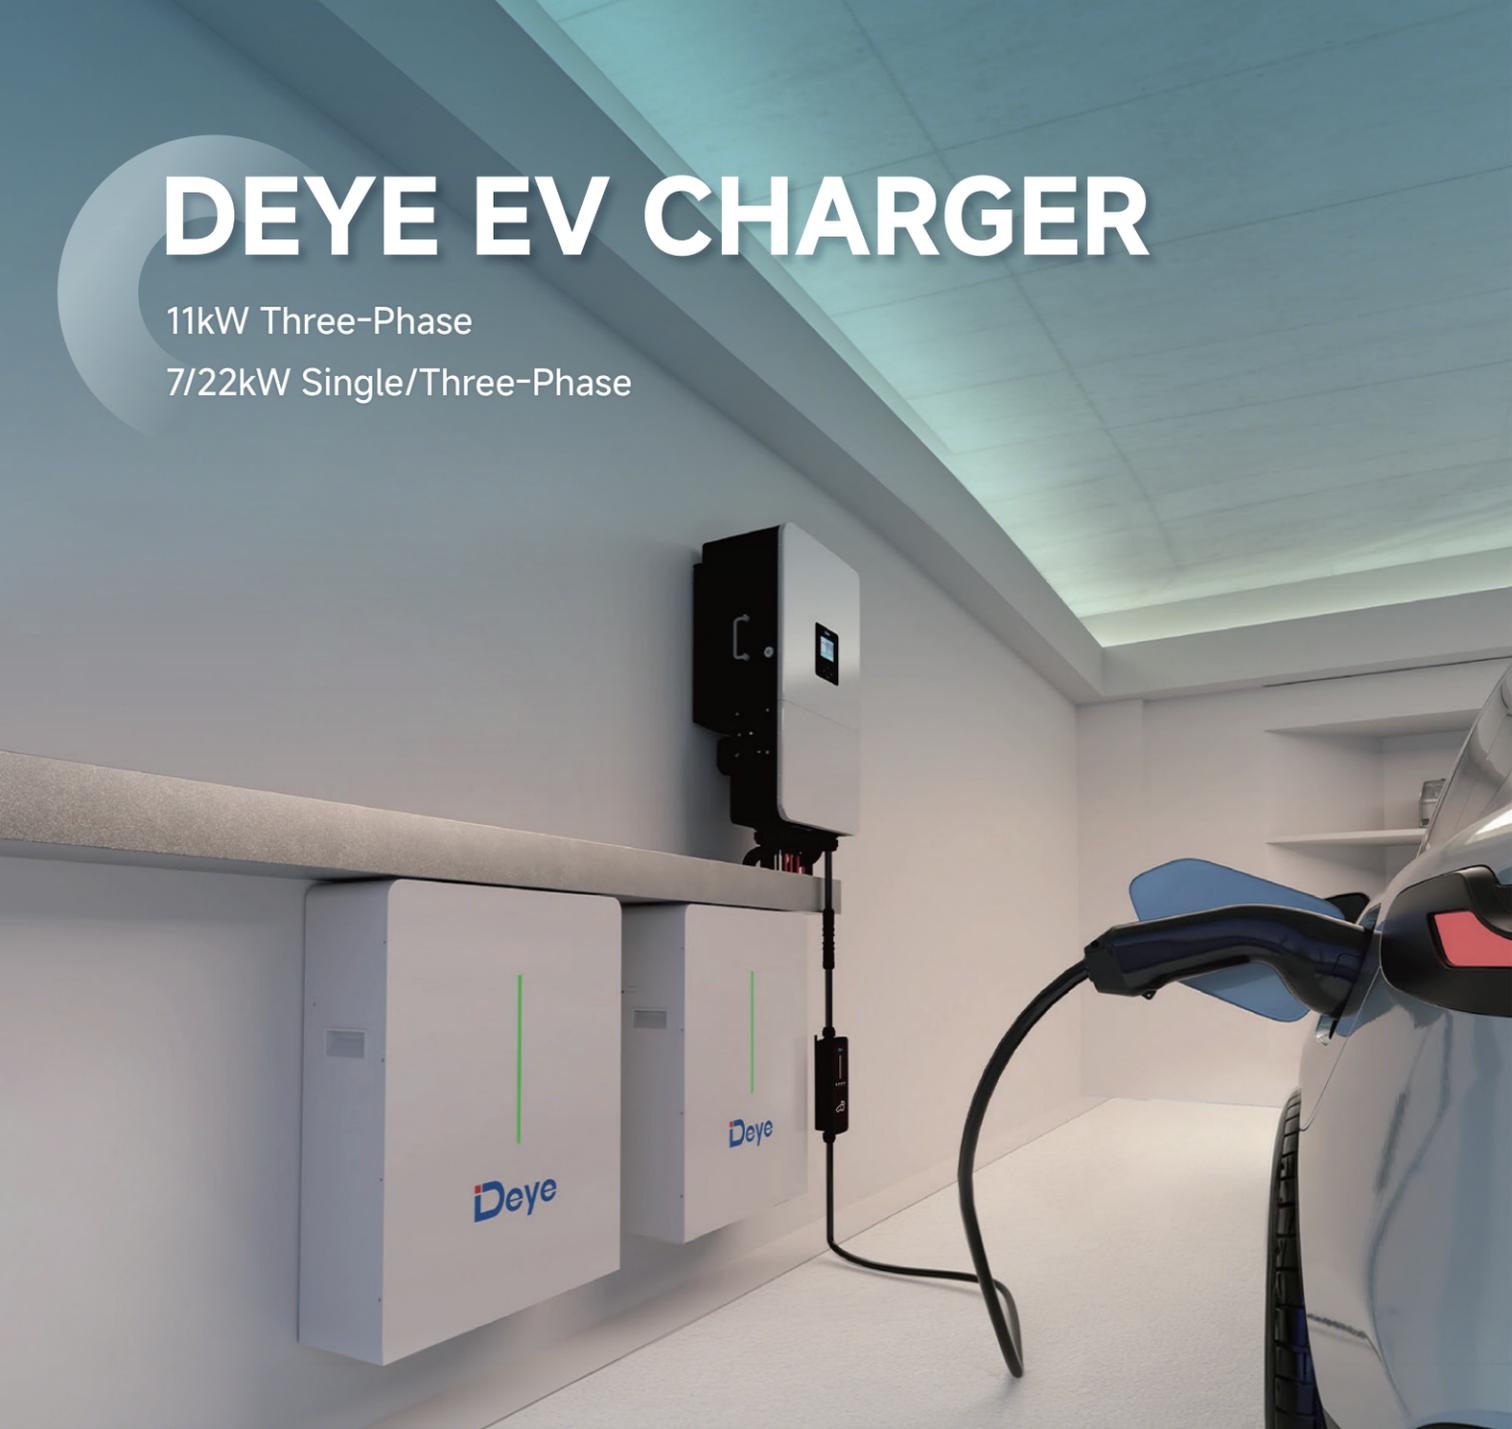


- Low latency
- LoRa communication
- Supports all Deye hybrid inverters
- Maximize The use Of Solar power
- Minimize the Electricity bill as much as possible




| Model | SUN-EVSE11K01-EU-AC | SUN-EVSE22K01-EU-AC |
|----------------------------------|---|---|
| Product Parameter | | |
| Input Voltage/Range (V) | 230/400 | 230(single phase), 230/400(three phase) |
| Connection Mode | 3L+N+PE | L+N+PE,3L+N+PE |
| Input Current (A) | 16 | 32 |
| Input Frequency/Range | 50/45-55, 60/55-65 | |
| Maximum Output Power (kW) | 11 | 7(single phase)/ 22(three phase) |
| Starting Method | Plug and Charge /Charge after Scanning/Appointment for Charging | |
| Equipment Protection | | |
| Over Temperature Protection | Yes | |
| Low Temperature Protection | Yes | |
| Over Voltage Protection | Yes | |
| Under Voltage Protection | Yes | |
| Short Circuit Protection | Yes | |
| Over Load Protection | Yes | |
| Earth Fault Protection | Yes | |
| Leakage Current Protection | DC 6mA | |
| Surge Protection Level | TYPE II | |
| General Data | | |
| Operating Temperature Range (°C) | -40 to +55 | |
| Permissible Ambient Humidity | 5%~95% No condensation | |
| Permissible Altitude (m) | ≤3000 | |
| Noise (dB) | <25 | |
| Ingress Protection(IP) Rating | IP 66 | |
| Cabinet Size (WxHxD mm) | 104x264x57.5 | |
| Weight (kg) | 3.7 | |
| Gun Cable Length (m) | 4.2 | |
| Number Of Charging Guns | 1 | |
| MTBF | 100,000h | |
| Safety EMC/Standard | EN IEC 61851-1:2019, IEC 61851-1:2017, EN 300 220-2 V3.1.1:2017, EN 300 328 V2.2.2:2019, EN IEC 62311:2020 EN 301 489-1 V2.2.3:2019, EN 301 489-3 V2.3.2:2023, EN 301 489-17 V3.3.1:2024, EN IEC 61000-6-1:2019 EN IEC 61000-6-3:2021, EN IEC 61851-21-2:2021 | |
| Interface | | |
| Communication Mode | LoRa/Wi-Fi/BLE | |

Deye Cloud - Installation Guide for Hybrid Inverter Commissioning

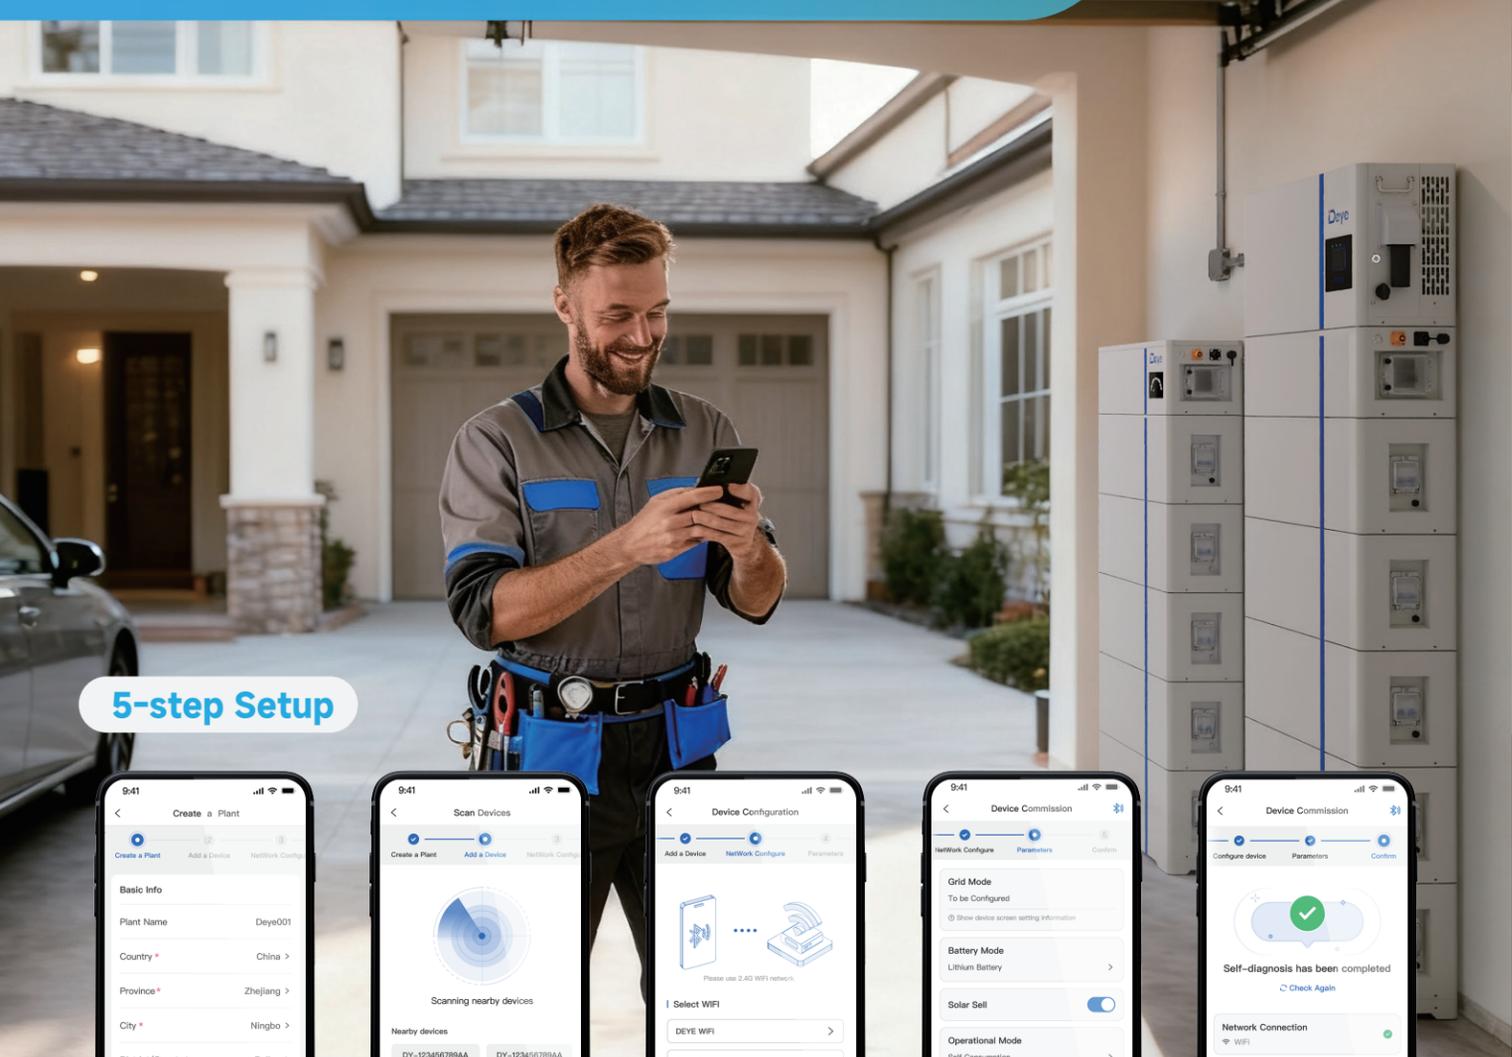

5-step Setup

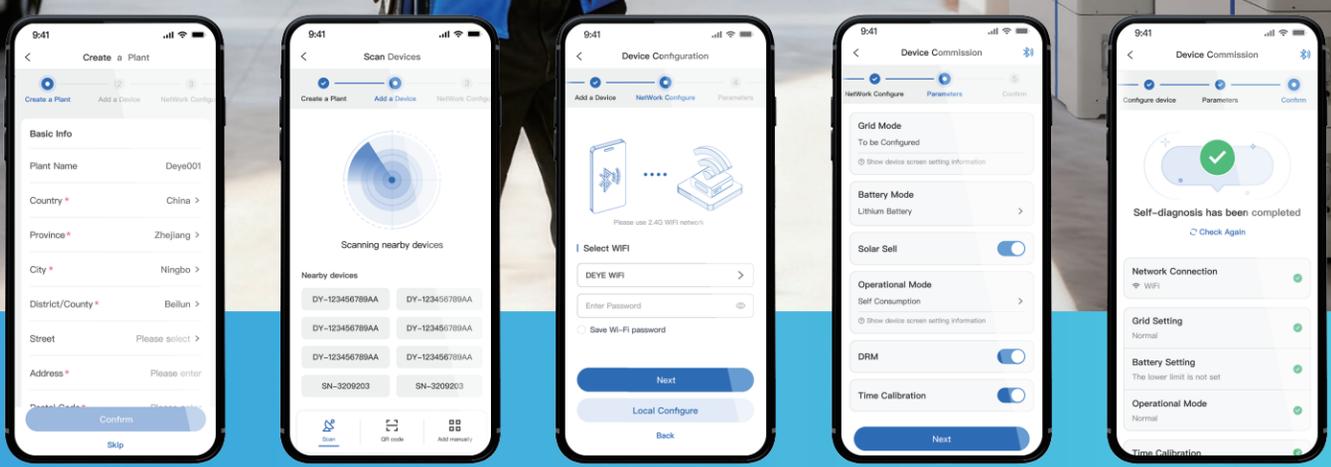

1. Create a Plant
2. Discover Devices
3. Configure Network
4. Set Parameters
5. Confirm

Easy Step-by-Step Guide

Clear instructions take you from wiring to config, right in the app, simplifying the process.

Full Communication Checks

Scans WiFi, Bluetooth to ensure everything's linked up perfectly.

Smart Parameter Setup

The app checks and sets key settings like voltage, grid, and battery automatically, making the process faster while eliminating any chance of mistakes.

Quick and Hassle-Free

Built-in tips and tracking keeps things efficient, saving time and avoiding the need for return trips.

Deye Cloud All-in-one Energy & Device Management Platform

- Unlock Significant Savings
- Individual Add-On for Dynamic Tariff
- Intelligent Charging/Discharging Strategies
- Tailored Solution to Deye Devices
- Real-time Equipment Monitoring



Smarten Up Your Home Energy

Download Deye Cloud APP to join us!
Embrace a seamless, effortless energy experience that's both eco-friendly and budget-friendly with our intelligent assistant



All in One

Smarter home energy and device management



Cloud-edge Collaboration

Faster and more efficient control



Accelerated Connectivity

Optimized for speed and performance



Advanced Smart Energy

A smarter way to manage your electricity bills