

# C&I ESS SOLUTION

DEYE WINTER MC SERIES



## Intelligent Cloud Platform

- ⊙ Customizable load algorithmic modules
- ⊙ 24-hour online O&M
- ⊙ Battery life and safety warning
- ⊙ Device cloud interconnection



## Ultimate Safety

- ⊙ 3+2 Fire Protection System
- ⊙ 3+3 Electrical Safety Safeguards
- ⊙ AC Leakage & DC Insulation Detection
- ⊙ High-voltage interlocking, preventing loaded arc operation



## Versatile Expansion

- ⊙ PCS/BMS/EMS All-in-one modular design
- ⊙ Support up to 10 cabinets in parallel
- ⊙ Support 2/4/6/8-hour energy storage applications
- ⊙ Higher energy density to reduce footprint
- ⊙ PV and BESS DC Coupling



## Multiple Application Scenarios

- ⊙ Peak-to-Valley arbitrage/Peak-to-Valley shifting
- ⊙ Virtual power plant ready
- ⊙ Off-grid operation (Islands, communication base stations, etc.)

5 Level

Extreme safety protection

≤10ms

Seamless on-grid and off-grid

430kW

2/4/6/8-hour energy storage system



**Model** **MC-L430-2H3 ( AC BESS )**

**System parameter**

|                          |                               |
|--------------------------|-------------------------------|
| Operating Temperature    | -25°C ~ 55°C (≥40°C Derating) |
| Storage Temperature      | -30°C ~ +60°C                 |
| Humidity                 | 0 ~ 95% ( No condensation )   |
| Type of cooling          | Liquid cooling                |
| Fire Suppression         | Aerosol, Water                |
| Ingress Protection       | IP54                          |
| Anticorrosion grade      | ≥C4                           |
| Altitude                 | ≤2000m                        |
| Communication            | RS485, Modbus TCP, DIDO       |
| Weight                   | ≤5000kg                       |
| Dimensions ( W × D × H ) | 2000 × 1300 × 2480mm          |

**DC Data**

|                           |                     |
|---------------------------|---------------------|
| Battery                   | LiFePO <sub>4</sub> |
| Nominal Capacity          | 280Ah               |
| Nominal Energy            | 430.08kWh           |
| Nominal DC Voltage        | 768Vd.c.            |
| DC Voltage Range          | 648~876Vd.c         |
| Charge and discharge rate | 0.5P                |

**AC Data**

|                    |                                    |
|--------------------|------------------------------------|
| Nominal AC Voltage | 380/400V 3L+N+PE                   |
| Rated Frequency    | 50 / 60Hz                          |
| Rated Power        | 200kW                              |
| Maximun Power      | 220kW ( 1.1 times of rated power ) |
| Power Factor       | -1~+1                              |



**Model** **MC-L430-BC-3 ( DC BESS )**


#### System parameter

|                          |                             |
|--------------------------|-----------------------------|
| Operating Temperature    | -25°C ~ 55°C                |
| Storage Temperature      | -30°C ~ +60°C               |
| Humidity                 | 0 ~ 95% ( No condensation ) |
| Type of cooling          | Liquid cooling              |
| Fire Suppression         | Aerosol, Water              |
| Ingress Protection       | IP54                        |
| Anticorrosion grade      | ≥C4                         |
| Altitude                 | ≤2000m                      |
| Communication            | RS485, Modbus TCP, DIDO     |
| Weight                   | ≤4700kg                     |
| Dimensions ( W × D × H ) | 2000 × 1300 × 2480mm        |

#### DC Data

|                           |                     |
|---------------------------|---------------------|
| Battery                   | LiFePO <sub>4</sub> |
| Nominal Capacity          | 280Ah               |
| Nominal Energy            | 430.08kWh           |
| Nominal DC Voltage        | 768Vd.c.            |
| DC Voltage Range          | 648~876Vd.c         |
| Charge and discharge rate | 0.5P                |

| Model                                       | MS-MPPT400-2                |
|---|-----------------------------|
| <b>System parameters</b>                    |                             |
| Dimension ( W × D × H, mm )                 | 1000 × 1000 × 2450          |
| Weight Appr. ( kg )                         | ≤950kg                      |
| System Operating temperature range          | -25°C ~ 55°C                |
| Max. working altitude ( m )                 | ≤2000m                      |
| IP Rating of Enclosure                      | IP54                        |
| <b>STS parameters</b>                       |                             |
| Rated working voltage ( V )                 | AC400                       |
| Auxiliary equipment operating voltage ( V ) | AC220, DC24                 |
| Frequency                                   | 50/60Hz                     |
| Rated power of load ( kW )                  | 400                         |
| Rated power of the power grid ( kW )        | 400                         |
| Rated power of oil engine ( kW )            | 400                         |
| Switching Time                              | ≤10ms                       |
| <b>MPPT parameters</b>                      |                             |
| No. of MPPT                                 | 2                           |
| MAX.PV Access Power(kW)                     | 400(200*2)                  |
| Max. PV Input Power ( kW )                  | 320(2*160)                  |
| Max. PV Input Voltage ( V )                 | 800                         |
| Start-up Voltage ( V )                      | 200                         |
| Rated PV Input Voltage ( V )                | 600                         |
| Max. Operating PV Input Current ( A )       | 2*(40+40+40+40+40+40+40+40) |
| Max. Input Short-Circuit Current ( A )      | 2*(60+60+60+60+60+60+60+60) |
| No.of MPP Trackers                          | 16 (2*8)                    |
| Max. Efficiency                             | >99%                        |
| MPPT Efficiency                             | >99.9%                      |

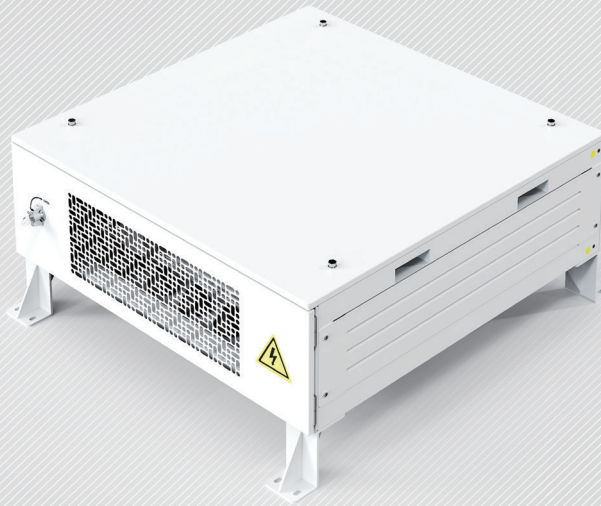

## MS-MPPT200-2

| Model                                   | MS-MPPT200-2            |
|---|-------------------------|
| <b>PV String Input Data</b>             |                         |
| MAX.PV Access Power(kW)                 | 200                     |
| Max. PV Input Power (kW)                | 160                     |
| Max. PV Input Voltage (V)               | 800                     |
| Start-up Voltage (V)                    | 200                     |
| MPPT Voltage Range (V)                  | 180-750                 |
| Full Load MPPT Voltage Range (V)        | 450-750                 |
| Rated PV Input Voltage (V)              | 600                     |
| Max. Operating PV Input Current (A)     | 40+40+40+40+40+40+40+40 |
| Max. Input Short-Circuit Current (A)    | 60+60+60+60+60+60+60+60 |
| No. of MPP Trackers                     | 8                       |
| <b>Efficiency</b>                       |                         |
| Max. Efficiency                         | >99%                    |
| MPPT Efficiency                         | >99.9%                  |
| <b>Equipment Protection</b>             |                         |
| DC input reverse protection             | YES                     |
| DC ARC protection                       | Optional                |
| Anti-PID(Potential Induced Degradation) | Optional                |
| DC Switch                               | YES                     |
| Surge Protection Level                  | TYPE II                 |
| <b>General Data</b>                     |                         |
| Ingress Protection(IP) Rating           | IP20(MPPT IP65)         |
| Cabinet Size[W×H×D] (mm)                | 543x198x700             |
| Weight (kg)                             | 70                      |
| Type Of Cooling                         | Intelligent air cooling |
| Safety EMC/Standard                     | IEC/EN 62109-1          |
| <b>DC Output Data</b>                   |                         |
| DC Output Voltage Range(V)              | 630-1000                |
| Max. DC Output Current(A)               | 200                     |



### AI Intelligence


- Large capacity energy aggregation
- Real-time electricity price revenue calculation
- One click generation of statistical charts
- Maximum profit charging and discharging strategy

### Efficient Operation and Maintenance

- Provide local / cloud operation and maintenance to ensure stable device operation
- Combination of multiple operation and maintenance methods for WEB / APP

### Safe and Reliable

- Real-time alarm for equipment malfunction
- Support SOC balance management

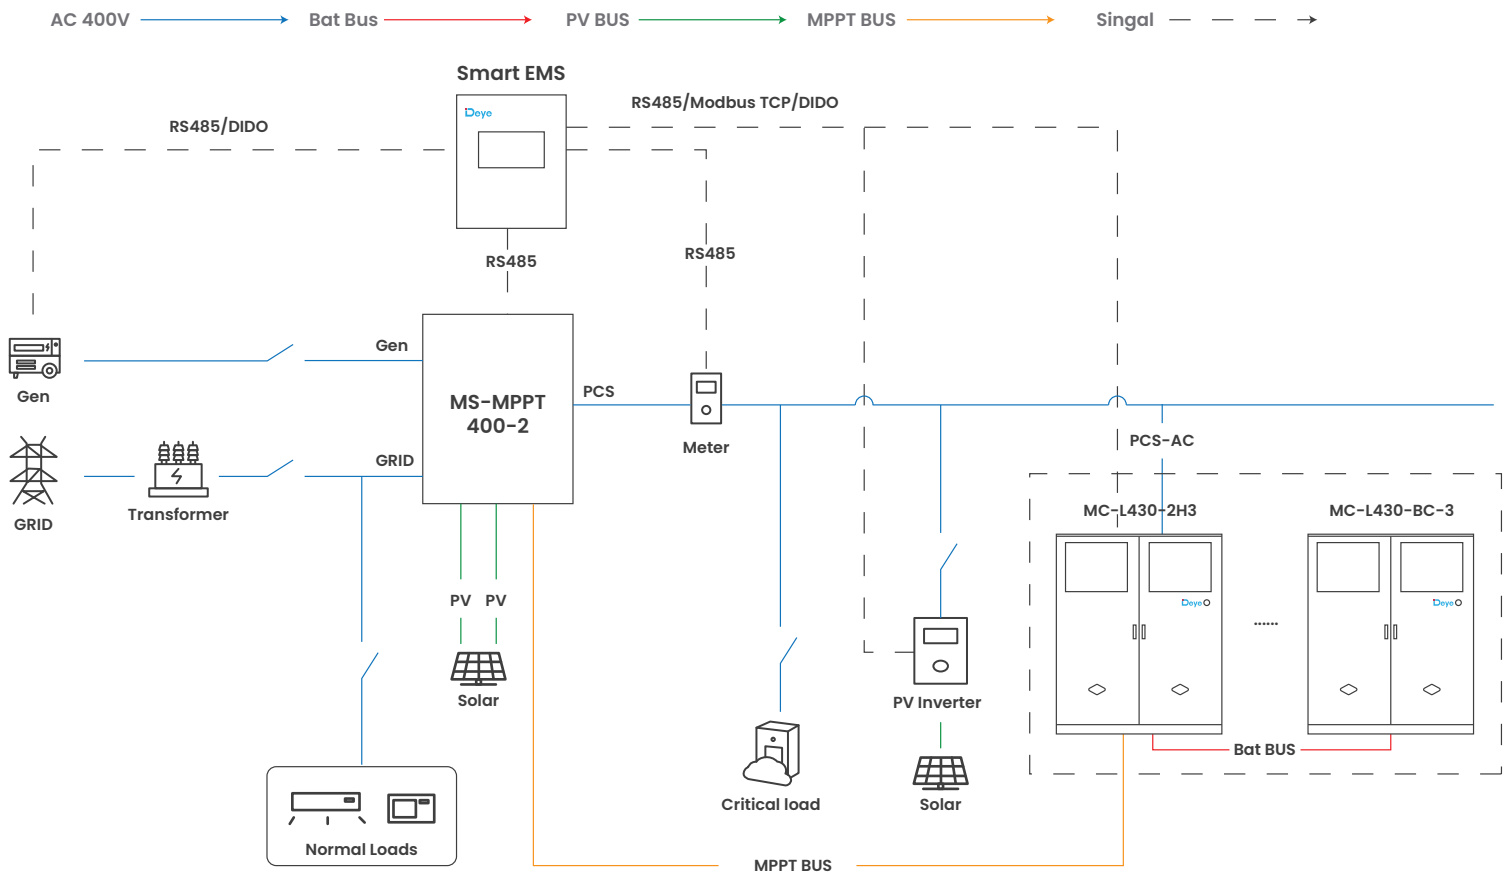


| Model                            | MS-EMS  |
|----------------------------------|---|
| <b>System</b>                    |   |
| Configuration                    | EMS controller, lightning protection module, switch power supply, UPS module, switch  |
| Function                         | Basic functions : peak valley arbitrage, anti backflow, main transformer overload protection, load tracking, demand control, backup power function, phase separation control, SOC balancing, Deye Cloud monitoring<br>Advanced features : load forecasting, production planning, electricity price planning, optimal economic curv                          |
| <b>Communicate</b>               |   |
| Ethernet ( 5 channels )          | 10 / 100 / 1000 Mbps  |
| Fiber optic port ( 2 channels )  | 1Gbps   |
| USB ( 2 channels )               | Host  |
| CAN ( 3 channels )               | Isolation, with 2 channels supporting CAN-FD  |
| RS485 ( 8 channels )             | Isolation   |
| RS232 ( 3 channels )             | 2 isolated channels, 1 non isolated debugging channel ( DB9 socket )  |
| TF Card ( 1 channel )            | Standard TF card holder   |
| LVDS ( 1 channel )               | The physical interface is DVI ( including 1 USB for touch )   |
| M. 2 Interfaces ( 1 channel )    | PCIe2.0 X1, Scalable SSD ( standard 1TB )   |
| MiniPCIe Interface ( 1 channel ) | 4G card with expandable USB communication protocol ( standard )   |
| Nano SIM Interface ( 1 channel ) | Used in conjunction with the miniPCIe expansion 4G module   |
| DI ( 17 channels )               | Optocoupler isolation   |
| DO ( 8 channels )                | Relay isolation   |
| WLAN                             | 802.11 b / AC g n, HT 20 / 40, 2.4 GHz 5 Ghz  |
| 4G Antenna                       | Support multi country frequency bands   |
| <b>Power Supply</b>              |   |
| Communication Input              | 220Vac  |
| DC IN                            | 24Vdc   |
| UPS Backup Power                 | 24Vdc   |
| Consumption                      | Max 25W   |
| <b>Environmental parameters</b>  |   |
| Operation Temperature            | -15°C ~ +50°C   |
| Storage Temperature              | -15°C ~ +50°C   |
| Working Humidity                 | 5% ~ 95%  |
| Max. Working Altitude ( m )      | ≤3000m  |
| IP Rating of Enclosure           | IP54  |
| Anti-Corrosion Grade             | ≥C4   |
| <b>Mechanical parameters</b>     |   |
| Dimension ( W × D × H, mm )      | 488 × 188 × 588   |
| Weight Appr. ( kg )              | ≤24.5kg   |
| Installation Location            | Indoor or outdoor, wall-mounted   |
| Box Material                     | Metal   |
| Incoming Specifications          | AC power cord : Recommended wire diameter 1.5mm <sup>2</sup><br>DC power cord : Recommended wire diameter of 1.5mm <sup>2</sup><br>Eight core Ethernet cable: Recommended CAT5e Ethernet cable<br>RS485 : Recommended 0.75mm <sup>2</sup> ~1.5mm <sup>2</sup> outdoor UV protection with shielding layer twisted pair cable length<1000m ( baud rate 9600 ) |


**NOTE: MAX 3 battery cabinets (without PCS) parallel**

AC 400V ——— Bat Bus ——— PV BUS ——— MPPT BUS ———

**For ESS on-grid application**

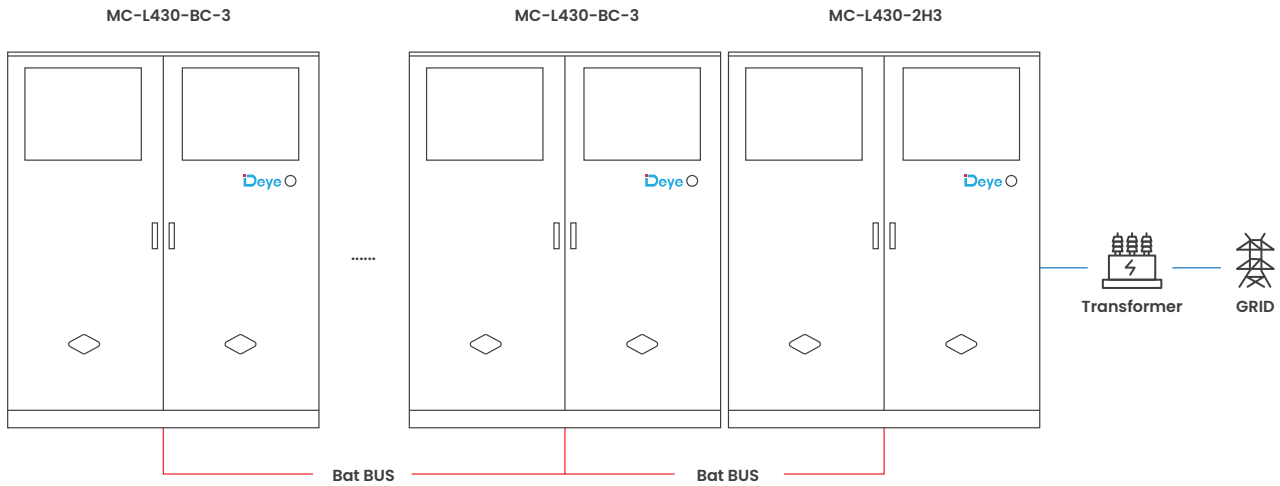


**For backup power application**

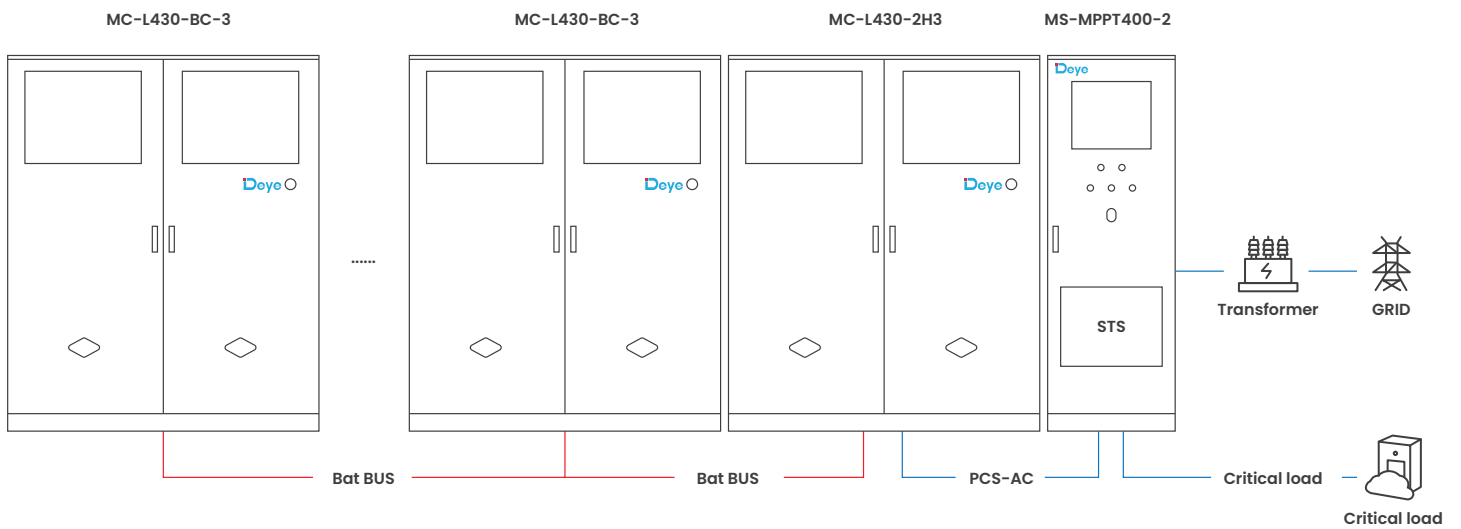


**NOTE: MAX 3 battery cabinets (without PCS) parallel**

AC 400V ——— Bat Bus ——— PV BUS ——— MPPT BUS ———

**For backup power application with solar**

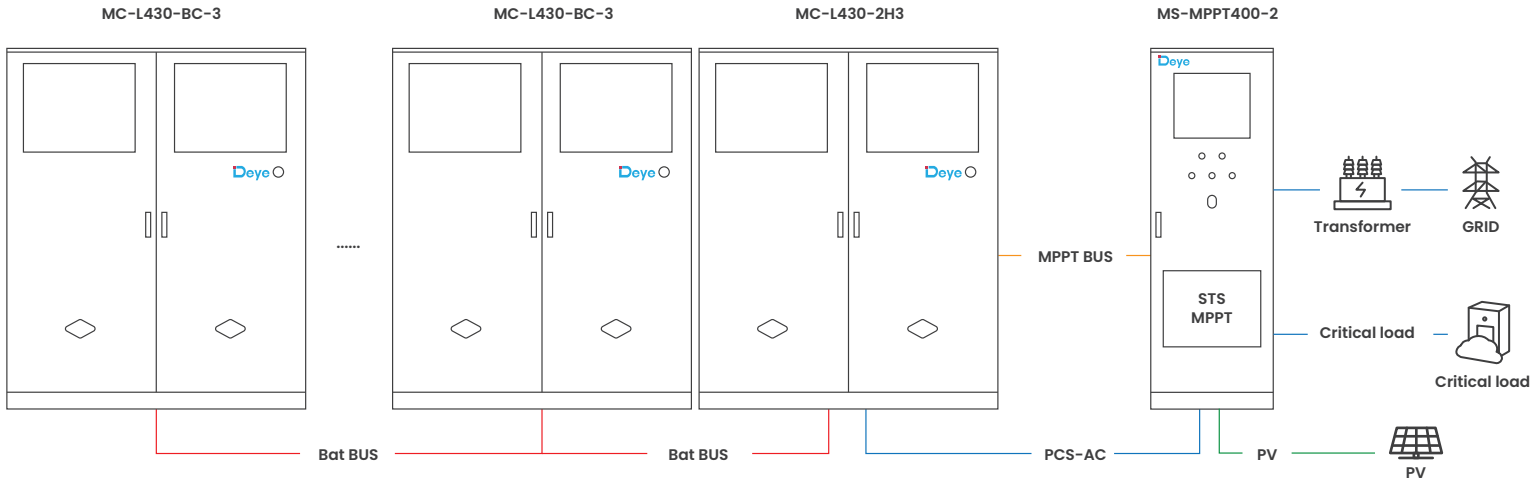



**For ESS on-grid application with solar**

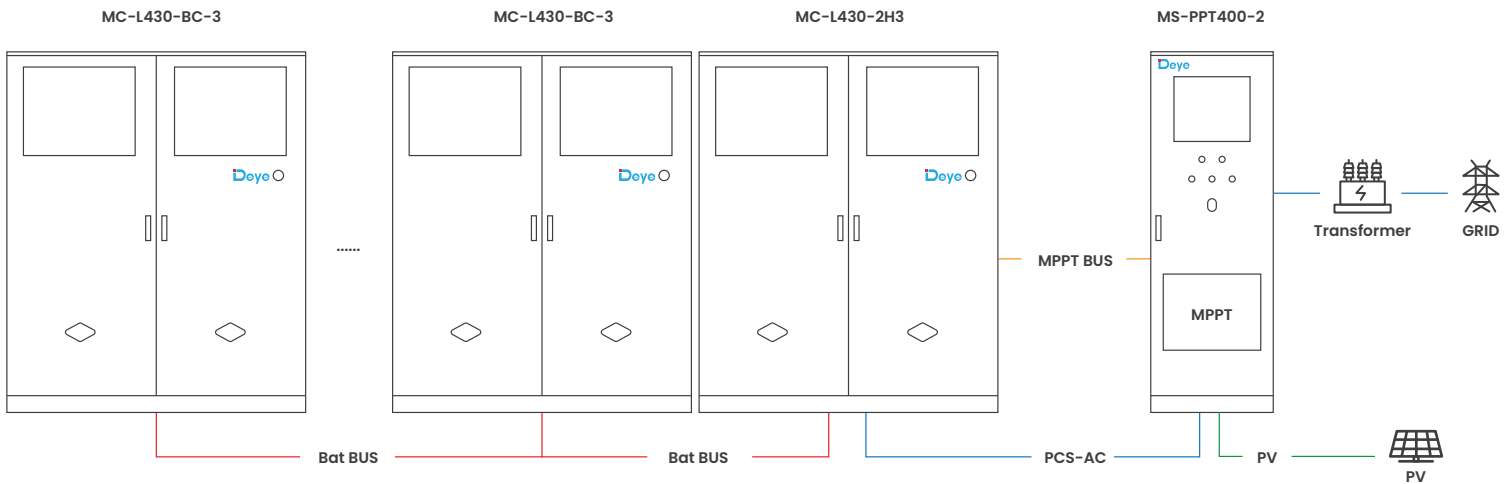

**NOTE: MAX 3 battery cabinets (without PCS) parallel**

AC 400V ——— Bat Bus ——— PV BUS ——— MPPT BUS ———


**For backup power application with generator and grid**

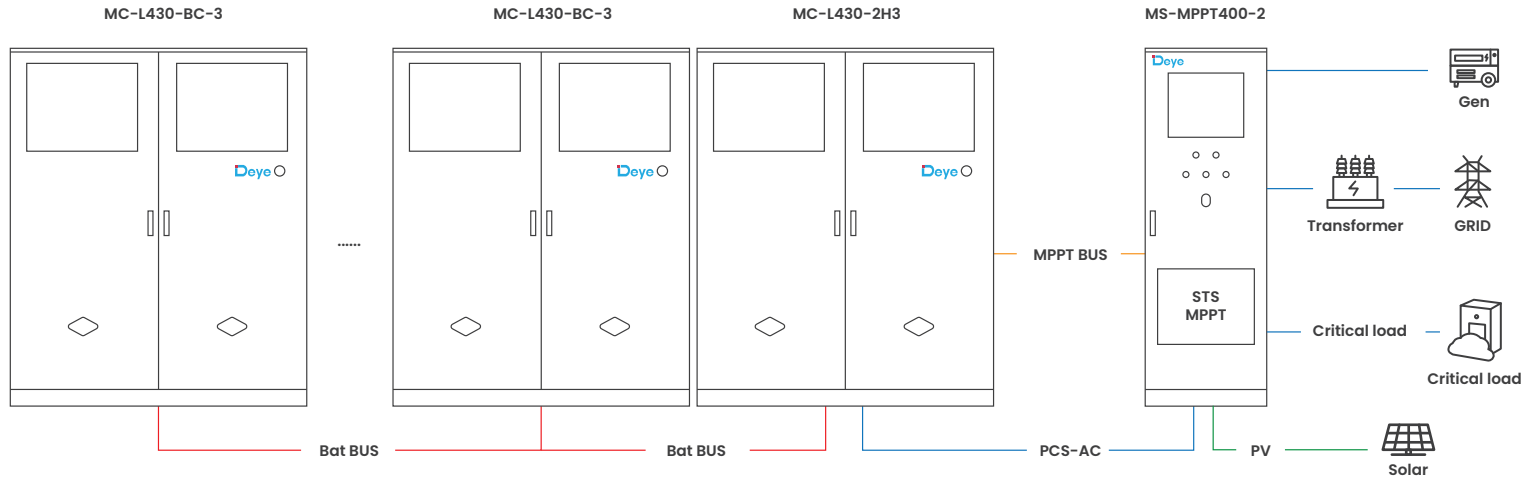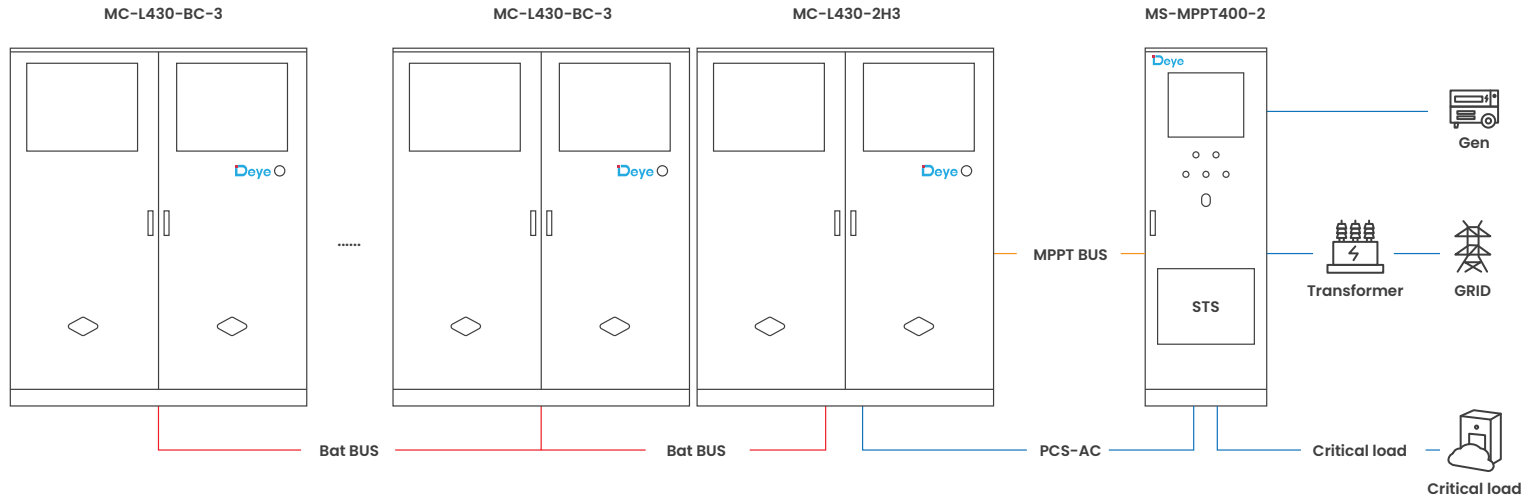


**NOTE: MAX 3 battery cabinets (without PCS) parallel**

AC 400V ——— Bat Bus ——— PV BUS ——— MPPT BUS ———

**For ESS off-grid application with solar and generator**

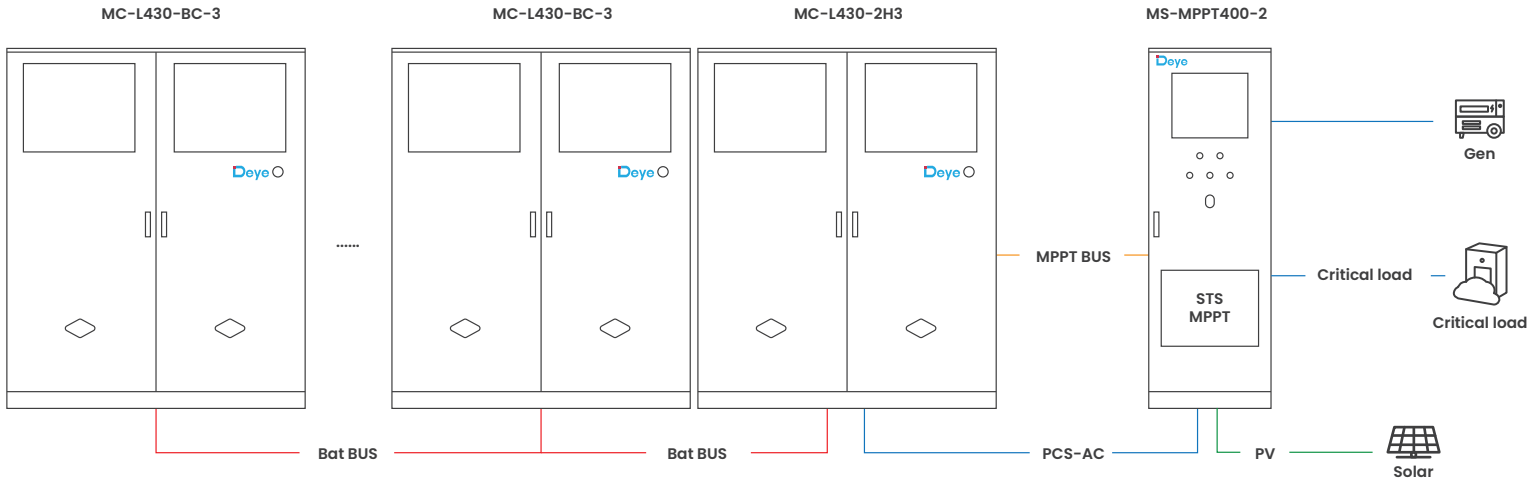

**For ESS off-grid application with solar**

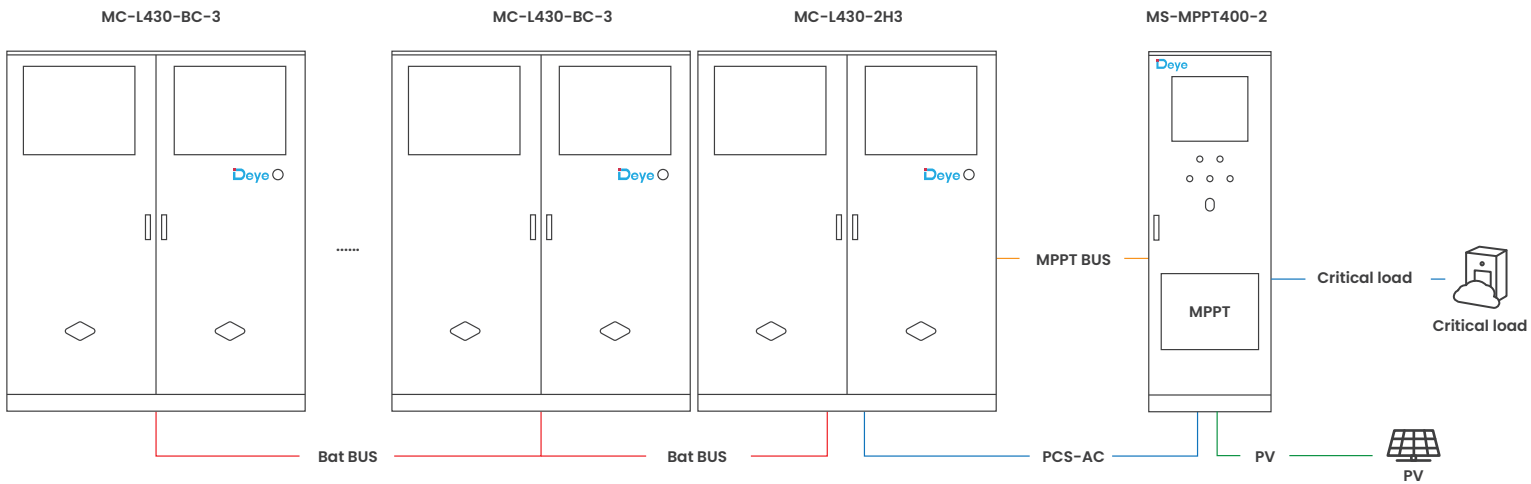



**POWERING YOUR LIFE**

 [www.deyeess.com](http://www.deyeess.com) / [www.deyeinverter.com](http://www.deyeinverter.com)

      **Deye ESS / Deye New Energy**