



ORION E OUTDOOR C&I ESS SOLUTION

GE-F256 Outdoor Battery Cabinet

+

SUN-60~80K Hybrid Inverter

Or

SUN-100/125K PCS+MPPT+STS Series Module



Ultimate Protection, Continuing "0" safety accidents

- **Six-dimensional** safety design, eliminating the risk of fire and explosion
- **D1 electrical isolation + D2 fire detection + D3 active exhaust + D4 explosion venting + D5 fire suppression + D6 Thermal isolation**
- High-intensity cabinet, **unique patented door latch design**, eliminates structural weak points
- **Hour-level fire resistance**, prevent heat spread



Highly Integrated, Plug and play, no debugging required

- Outer cabinet wall preset inverter bracket installation position, **no wall bearing concerns, no need to drill**
- **Hybrid inverter**, covering PV, grid, load, generator, and battery interfaces
- Single cabinet can easily deploy **PV+ESS, PV+ESS+DG**



Stable Efficient, Excellent performance ensures returns

- Long-life lithium iron phosphate battery, **≥ 8000 cycles**
- High-efficiency thermal management, **no derating at 45°C**, cell temperature difference **≤6°C**
- Up to **200%** PV over-matching access



Intelligent Management, Flexible adaptation and expansion

- Self-developed **"3S"(EMS+PCS+BMS)**, full-system Intelligent Control
- Single cabinet can be configured with a **2/3/4h system of 60-125kW**, up to **10 units** AC-side on/off-grid parallel or **10 units** DC-side battery parallel
- Integrated energy platform, **24/7 AI** smart customization of optimal power usage strategies

GE-F256 Outdoor Battery Cabinet

Model		GE-F256-BC-2-A3
Main Parameters		
Cell Type	LiFePO ₄	
Module Capacity (Ah)	314	
Module Nominal Voltage (Vdc)	51.2	
Module Energy (kWh)	16.08	
Module Qty In Series	16	
System Nominal Energy (kWh)	257.23	
System Usable Energy (kWh) ¹	257.23	
System Nominal Voltage (Vdc)	819.2	
System Operating Voltage (Vdc)	640~934.4	
Rated DC Power (kW)	129	
Charge/Discharge Current(A) ²	Recommend	157
	Max. Continuous	180
	Peak discharge	285
	@15s/20~45°C	
Other Parameters		
Fire Protection System	Aerosol and Water fire interface, CO gas detection, Active exhaust and Explosion venting	
Cooling Method	Smart Air Conditioner	
Communication Port	CAN, RS485	
Communication protocol	CAN2.0, Modbus485	
Operating Temperature(°C) ³	-30~55	
Recommend Storage Temperature(°C)	0~35	
Humidity	5% ~ 95%RH (No Condensing)	
Altitude	3000m	
IP Protection	IP55	
Anti Corrosion Level	Standard: C4-M, customizable up to C5	
Dimension(W x D x H,mm)	1303x1240×2510	
Weight(kg)	2770	
Installation Location	Floor mount	
Cycle Life	≥8000 (25±2°C,0.5P,EOL70%)	
Warranty	10 years	
Certification	UN38.3,CE,IEC62619,IE62477,IEC62933-5-2,UL9540A,CEC	

1. Test conditions : 100% DOD, 0.5P charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.

2. The current is affected by temperature and SOC.

3. Derated operation at > 45°C.

GE-F256 Series Outdoor Battery Cabinet Accessories

Power Distribution Unit




Model	BOS-B-PDU-2-A
Operating Voltage	200~1000Vdc
Nominal Charge/Discharge Current	180A
Operating Temperature	-20~60° C
Ingress Protection	IP20
AC Input Rating	220±10%VAC/2A
Details	526×788.6×167.2(W×D×H), 32kg

Battery Pack



Model	BOS-B-Pack16-A3
Nominal Capacity	314Ah
Nominal Energy	16.08kWh
Nominal Voltage	51.2Vdc
Max Charge/Discharge Current	180A
Ingress Protection	IP20
Operating Temperature (Charge)	0 - 55° C
Operating Temperature (Discharge)	-20 - 55° C
Storage Temperature	0 - 35° C
Details	526 × 795.9 × 274.2 (W × D × H), 126kg

Matching accessory pack

Model	Main Accessories			Application
GE-F256-AP-A				For inverters with single or dual battery ports < 100A
	3AWG_3000mm*2	3AWG_3000mm*2	Communication Cable_3000mm	
			Inverter Mounting Bracket Cable Cover	
GE-F256-AP-C				For SUN-100/125K-PCS01HP3
	1AWG_3000mm	1AWG_3000mm	Communication Cable_3000mm	

Battery Cabinet Compatible Inverters

Model	SUN-60K-SG02HP3-AU-EM6	SUN-70K-SG02HP3-AU-EM6	SUN-80K-SG02HP3-AU-EM6
Battery Input Data			
Battery Type	Lithium-ion		
Battery Voltage Range (V)	160-1000		
Max. Charging/Discharging Current (A)	80+80		
Charging Strategy for Li-ion Battery	Self-adaption to BMS		
Number of Battery Input	2		
PV String Input Data			
Max. PV access power (W)	120000	140000	160000
Max. PV Input Power (W)	96000	112000	128000
Max. PV Input Voltage (V)	1000		
Start-up Voltage (V)	180		
MPPT Voltage Range (V)	150-850		
Rated PV Input Voltage (V)	650		
Max. Operating PV Input Current (A)	36+36+36+36+36+36		
Max. Input Short-Circuit Current (A)	54+54+54+54+54+54		
No. of MPP Trackers/ No. of Strings MPP Tracker	6/2+2+2+2+2		
AC Input/Output Data			
Rated AC Input/Output Active Power (W)	60000	70000	80000
Max. AC Input/Output Apparent Power (VA)	60000	70000	80000
Rated AC Input/Output Current (A)	87	101.5	116.0
Max. AC Input/Output Current (A)	87	101.5	116.0
Max. Continuous AC Passthrough (grid to load) (A)	200		
Peak Power (off-grid) (W)	1.5 times of rated power, 10s		
Power Factor Adjustment Range	0.8 leading to 0.8 lagging		
Rated input/output voltage	230/400V	240/415V	0.85Un-1.1Un 3L+N+PE
Rated Input/Output Grid Frequency/Range(Hz)	50/45-55		
Total Current Harmonic Distortion THDi	<3% (of nominal power)		
DC Injection Current	<0.5% In		
Efficiency			
Max. Efficiency	98.7%		
Euro Efficiency	98.1%		
MPPT Efficiency	>99%		
Equipment Protection			
Integrated	DC Reverse Polarity Protection, AC Output Overcurrent Protection, Thermal Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, DC Component Monitoring, Arc Fault Circuit Interrupter (AFCI) (optional), Anti-islanding Protection(Active Frequency shift), DC Switch, Insulation Impedance Detection, Residual Current Detection		
Surge Protection Level	TYPE II(DC), TYPE II(AC)		
Interface			
LCD/LED Display	LCD+LED		
Communication Interface	RS485, RS232, CAN		
General Data			
Operating Temperature Range (°C)	-40 to +60°C, >45°C Derating		
Permissible Ambient Humidity	0-100%		
Permissible Altitude	3000m		
Noise (dB)	≤65		
Ingress Protection(IP) Rating	IP 65		
Protection Level	Class I		
Inverter Topology	Non-Isolated		
Over Voltage Category	OVC II(DC), OVC III(AC)		
Cabinet Size (WxHxD mm)	606×927×314 (Excluding Connectors and Brackets)		
Weight (kg)	105		
Type of Cooling	Smart Cooling		
Warranty	10 Years		
Grid Regulation	AS/NZS 4777.2		
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		

ESS Solution (Recommend)



GE-F256

+



SUN-60K/80K-SG02HP3-EU-EM6

Or



SUN-125K-PCS01HP3+
(SUN MPPT-L01-EU+SUN-ST5500L)

Power Unit

Battery Cabinet Model

Specification

2h ESS Solution

SUN-125K-PCS01HP3 (200A) +
(SUN MPPT-L01-AU+SUN-ST5500L)*

GE-F256-BC-2-A3

125kW/257kWh

3h ESS Solution

SUN-80K-SG02HP3-AU-EM6 (80A+80A)

GE-F256-BC-2-A3

80kW/257kWh

4h ESS Solution

SUN-60K-SG02HP3-AU-EM6 (80A+80A)


GE-F256-BC-2-A3

60kW/257kWh

*: SUN MPPT-L01-AU and SUN-ST5500L are optional

AC/DC Side Parallel Expansion (Capacity & Power)

ENERGY STORAGE SYSTEM

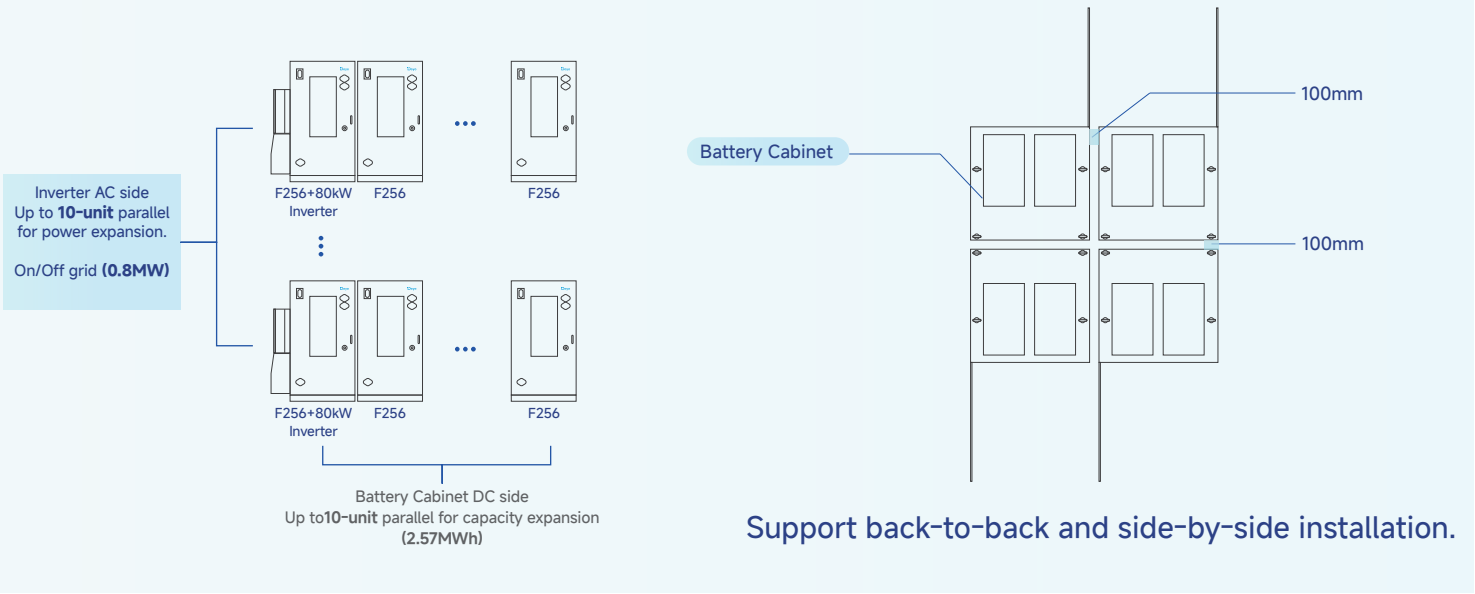


Deye Cloud

All-in-one Energy & Device Management Platform

- Unlock significant savings
- Individual Add-on for dynamic tariff
- Intelligent charging/discharging strategies
- Tailored solution to deye devices
- Real-time equipment monitoring
- Best energy scheduling solutions by Deye Copilot algorithm
- 24/7 AI Assistant support

Switch flexibly between autonomous and manual control

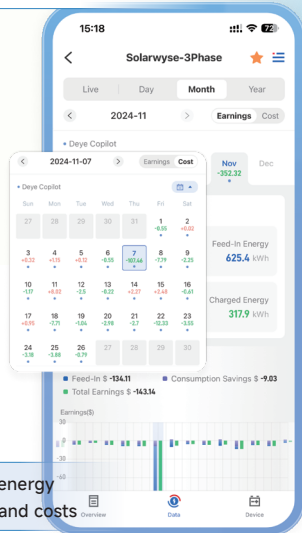

Display energy savings and costs



Support dynamic tariff and flat-rate

AI Assistant



Offer response suggestions and personalized support experience

Support over 30 languages

Analyze dynamic pricing, predict power load and PV generation to optimize energy dispatch and minimize electricity costs



Smarten Up Your Hybrid Energy Storage System

Download Deye Cloud APP to join us!

Embrace a seamless, effortless energy experience that's both eco-friendly and budget-friendly with our intelligent assistant



 APP & Web Manage your energy effortlessly	 Cloud-edge Collaboration Faster and more efficient	 Accelerated Connection Optimized for speed and performance	 Localized Data Centers Ensure data sovereignty and compliance in EU & US	 Deye Copilot AI-powered energy analysis and control	 AI Assistant 24/7 support, fast, efficient, in your language
---	--	--	--	---	--



POWERING YOUR LIFE



www.deyeess.com / www.deyeinverter.com



Deye ESS / Deye New Energy