



ESS Solution

SE-F16 Max

SE-F16 Max-H



Safer & Reliable

Lithium Iron Phosphate (LFP) Battery, safety and long lifespan.
Built-in intelligent BMS with active fuse, providing complete protection.
Intelligent thermal management, IP65/NEMA 3R, wide temperature range: -20°C to 55°C.



Convenient & Smart

Battery module auto networking (No DIP switches), easy to use.
Support Deye Cloud remotely monitoring and upgrade via Deye Inverter.
Support local Bluetooth APP monitoring and upgrade.



Flexible

Modular design, easy to expand, Max. 32 units in parallel.
Suited to residential and small commercial applications for increasing the self-consumption ratio.



Ultra-efficient

Support Max. 0.5C charge & 0.7C discharge, Max. 11.8kW output power.
Integrated PACK design reduces line loss and increases energy density.



Wall-Mounted & Floor-Mounted

Flat design, support wall-mounted and Floor-mounted, saving installation space.

ESS SOLUTION



Model		SE-F16 Max	SE-F16 Max-H
Main Parameters			
Battery Chemistry		LiFePO ₄	
Rated Capacity (Ah) ^[1]		314	
Scalability ^[2]		Max. 32 pcs in parallel	
Nominal Voltage (V)		51.2	
Operating Voltage(V)		44.8 - 57.6	
Nominal Energy (kWh)		16	
Usable Energy (kWh) ^[1]		16	
Max. Output Power (kW)		11.8	
Charge Current(A) ^[3]	Recommend	157 A	
	Max. Continuous	160	
	Peak	280 (10 sec)	
Discharge Current(A) ^[3]	Recommend	157 A	
	Max. Continuous	230	
	Peak	280 (10 sec)	
Other Parameter			
Recommend Depth of Discharge		90% DoD	
Dimension (W/H/D)(Without hanging board and terminals)		464*914*244.5	
Weight Approx. (kg)		118	
Display		LCD(SOC, Alarm)	
Ingress Protection Rating/Enclosure Rating		IP65/NEMA 3R	
Operating Temperature		Charge: 0~55°C, Discharge: -20~55°C	Charge: -20~55°C (Heating On), Discharge: -20~55°C
Storage Temperature		0°C~35°C	
Relative Humidity		95% (non-condensing)	
Altitude (m/ft)		≤3000/9843	
Cycle Life		≥6000(25°C±2°C ,70%EOL)	
Max. Energy RTE (DC) ^[1]		95%	
Isolation Protection		Built-in Circuit Breaker	
Installation		Wall-Mounted, Floor-Mounted	
Communication		CAN2.0, RS485, Bluetooth	
Certification		UN38.3, CE, CB, UL9540A	
Energy Throughput ^[4]		50 MWh	
Warranty Period ^[4]		10 years	

[1] Test conditions : 25°C±2°C , at beginning of life, 0.5C charge & 0.5C discharge,100% DOD.

[2] Max. 64 pcs can parallel with CAN-Bridge.

[3] The current is affected by temperature and SOC.

[4] Conditions apply, refer to Deye Warranty Letter.

Deye APP



Bluetooth APP Monitoring




Low Power (Bluetooth LE)



Automated upgrade



Local monitoring mode for battery

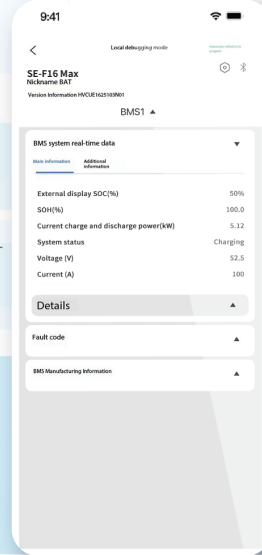

Quick Pairing





No Internet Needed



Portable Control



Remote monitoring mode for ESS(Deye Inverter&Battery)

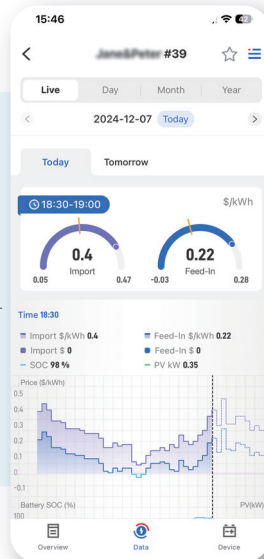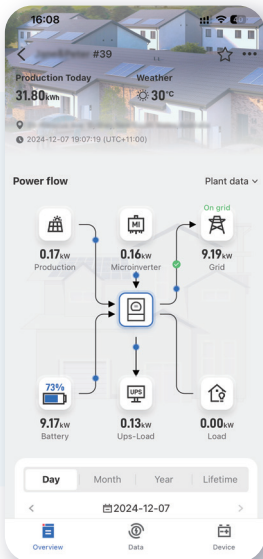

Real-time Equipment Monitoring



Intelligent Charging/Discharging Strategies



AI Data Analytics



Customized Maintenance

Smarten Up Your Home Energy



Download Deye APP to join us!

Embrace a seamless, effortless energy experience that's both ecofriendly and budget-friendly with our intelligent assistant



Deye ESS / Deye New Energy



www.deyeess.com / www.deyeinverter.com



POWERING YOUR LIFE



www.deyeess.com / www.deyeinverter.com



Deye ESS / Deye New Energy