




NEPT S

RESIDENTIAL ESS SOLUTION


SE-F12-A


 **Comprehensive Protection**
— Advanced BMS with active fuse

 **Superior Performance**
— Support Max. 230A charge & discharge

 **Optimized Energy Density**
— Integrated PACK: reduced line loss, enhanced energy density

 **Flexible Expansion**
— Max. 32 units in parallel

 **Easy Maintenance**
— Auto-networking, Local monitoring mode for battery, remote monitoring mode for ESS


 **Reliable Durability**
— Operates reliably in -20°C to 55°C , natural cooling

Model		
SE-F12-A		
Main Parameters		
Battery Chemistry	LiFePO ₄	
Capacity	235 Ah	
Scalability ^[1]	Max. 32 pcs in parallel	
Nominal Voltage	51.2 V	
Operating Voltage	44.8 V ~ 57.6 V	
Nominal Energy	12.03 kWh	
Charge Current ^[2]	Max. Continuous	230 A
	Peak	280A(10 sec)
Discharge Current ^[2]	Max. Continuous	230 A
	Peak	280A(10 sec)
Other Parameter		
Recommend Depth of Discharge	90% DoD	
Dimension (W × H × D) (Without hanging board)mm	400 x 589 x 233	
Weight Approximate	84 kg	
LED Indicator	LED (SOC, working, protecting) & Buzzer	
IP Rating of Enclosure	IP21	
Operating Temperature	Charge :0~55°C/Discharge: -20~55°C	
Storage Temperature	0°C~35°C	
Relative Humidity	95% (non-condensing)	
Altitude	≤3000m	
Cycle Life	≥6000(25°C±2°C ,70%EOL)	
Installation	Wall-Mounted, Floor-Mounted, Stack-Mounted	
Communication	CAN2.0,RS485,Bluetooth+APP	
Warranty Period ^[3]	10 years	
Energy Throughput ^[3]	37 MWh	
Certification	UN38.3, CE, CB	

[1] Max. 64 pcs can parallel with CAN-Bridge.

[2] Operating current is affected by temperature and SOC.


[3] Conditions apply, refer to Deye Warranty Letter.

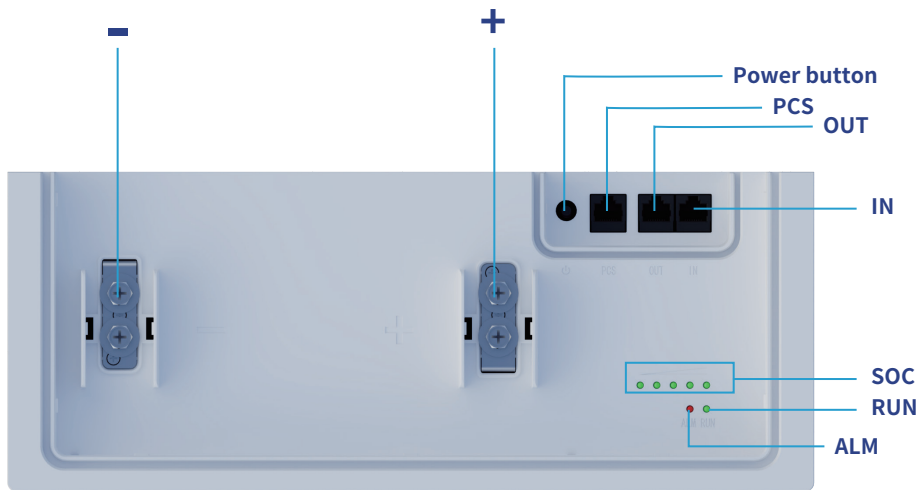


- ⊙ -: Battery negative terminal connection position.
- ⊙ +: Battery positive terminal connection position.
- ⊙ SOC: These 5 LEDs are used to display the pack SOC and charge or discharge state.
- ⊙ RUN light: green LED lighting to show the battery running status.
- ⊙ ALM light: red LED lighting to show the battery has been alarmed .
- ⊙ Power button: Power on or off the control battery.
- ⊙ PCS: Inverter communication terminal:(RJ45port) follow the CAN protocol (baud rate:500kbps),and RS485(baud rate:9600bps),used to output battery information to the inverter.
- ⊙ OUT: parallel Communication Terminal:(RJ45port) Connect "IN"Terminal of Next battery,for Communication between multiple parallel batteries.
- ⊙ IN: parallel Communication Terminal: (RJ45 port) Connect "OUT" Terminal of Previous battery,for Communication between multiple parallel batteries.

SE-F Series Model Selection and Appearance Reference


Common version



LED strip version




Display screen version




Config Version

L


Reference



E




C



Deye Smart Energy Management System(Optional)

The Deye Smart Energy Management System enables seamless control with smart CT, smart plug, smart switch and solar EV charging, ensuring efficiency and full compatibility with Deye inverters.

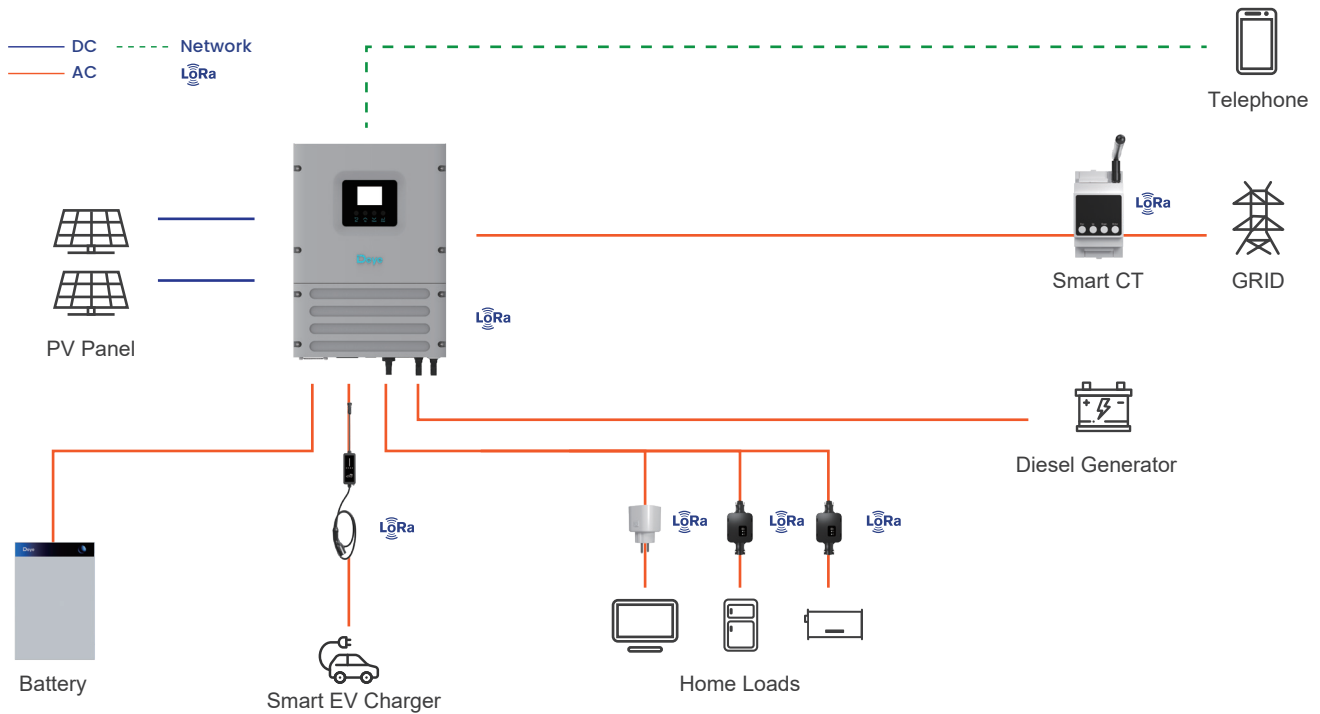

Key Features

- Wireless Zero Export Control**
Enables seamless zero export without the need for complex wiring, simplifying installation.
- Intelligent Load Control**
Automatically manages loads based on time schedules and battery SOC, optimizing energy distribution.
- Solar-Powered EV Charging**
Supports 100% solar charging with dynamic power adjustment for enhanced efficiency and sustainability.
- Full Compatibility**
All Deye hybrid inverters can be upgraded to support this system, ensuring seamless integration with existing setups.
- Precise Off-Grid Load Management**
Ensures that only non-essential loads are disconnected during off-grid operation, maintaining power supply for critical applications.




Deye APP


Bluetooth APP Monitoring

Low Power (Bluetooth LE)

Automated upgrade

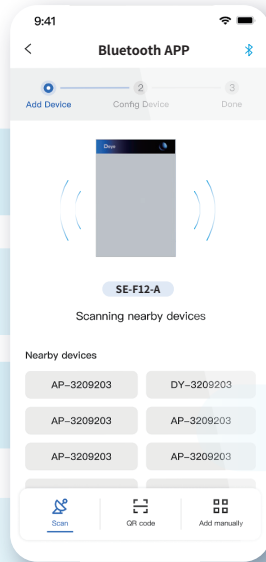

Local monitoring mode for battery

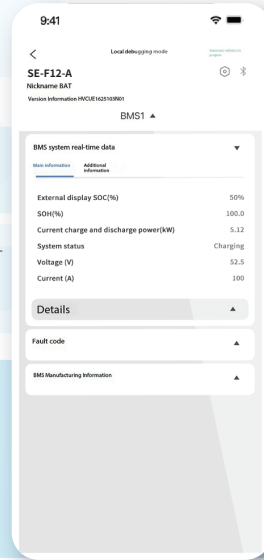


Quick Pairing

No Internet Needed

Portable Control



Remote monitoring mode for ESS(Inverter&Battery)

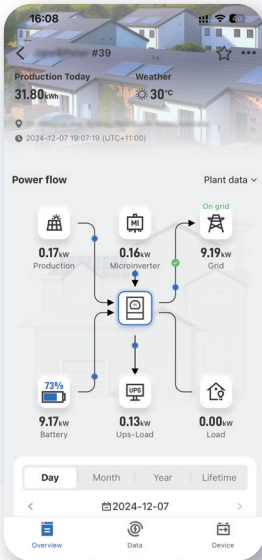

Real-time Equipment Monitoring

Intelligent Charging/Discharging Strategies

AI Data Analytics

Customized Maintenance

Smarten Up Your Home Energy



Download Deye APP to join us!

Embrace a seamless, effortless energy experience that's both ecofriendly and budget-friendly with our intelligent assistant





POWERING YOUR LIFE



www.deyeess.com / www.deyeinverter.com



Deye ESS / Deye New Energy