



NEPT S RESIDENTIAL ESS SOLUTION

SE-F5-24-A

Comprehensive Protection

- Advanced BMS with active fuse

Superior Performance

- Support Max. 100A charge & discharge, GAN MOSFETs:50% loss reduction,high-temp resistance

Optimized Energy Density

- Integrated PACK: reduced line loss, enhanced energy density

Flexible Expansion

- Max. 32 units in parallel

Easy Maintenance

- Auto-networking, Local monitoring mode for battery, remote monitoring mode for ESS

Reliable Durability


- Operates reliably in -20°C to 55°C, natural cooling

Model		SE-F5-24-A
Main Parameters		
Battery Chemistry		LiFePO ₄
Capacity		200 Ah
Scalability ^[1]		Max. 32 pcs in parallel
Nominal Voltage		25.6 V
Operating Voltage		22.4 V~ 28.8 V
Nominal Energy		5.12 kWh
Charge Current ^[2]	Max. Continuous	100 A
	Peak	120A (10 sec)
Discharge Current ^[2]	Max. Continuous	100 A
	Peak	120A (10 sec)
Other Parameter		
Recommend Depth of Discharge		80% DoD
Dimension (W × H × D) (Without hanging board)mm		360 x 545 x 142.5 mm
Weight Approximate		41 kg
LED Indicator		LED (SOC, working, protecting) & Buzzer
IP Rating of Enclosure		IP21
Operating Temperature		Charge:0~55°C/Discharge:-20~55°C
Storage Temperature		0°C~35°C
Relative Humidity		95% (non-condensing)
Altitude		≤3000m
Cycle Life		≥6000(25°C±2°C ,70%EOL)
Installation		Wall-Mounted, Floor-Mounted, Stack-Mounted
Communication		CAN2.0, RS485, Bluetooth+APP
Warranty Period ^[3]		5 years
Energy Throughput ^[3]		8 MWh
Certification		UN38.3

[1] Max. 64 pcs can parallel with CAN-Bridge.

[2] Operating current is affected by temperature and SOC.

[3] Conditions apply, refer to Deye Warranty Letter.

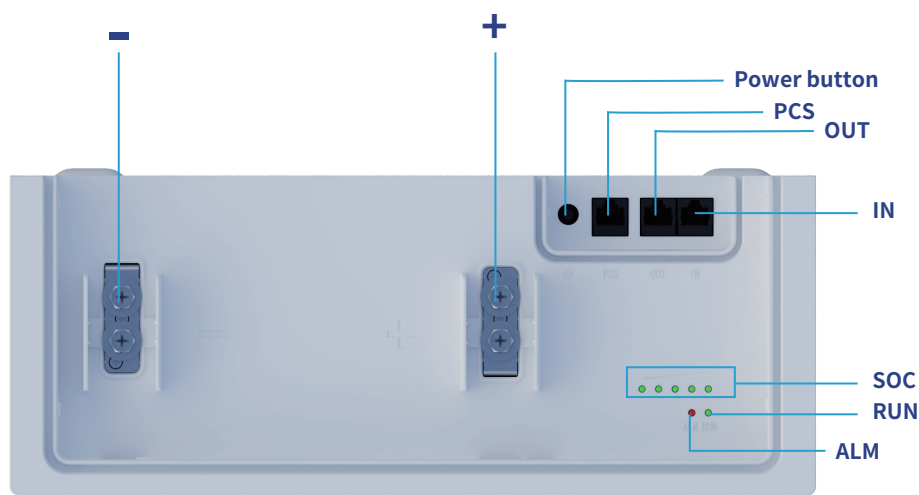


- ⊙ -: Battery negative terminal connection position.
- ⊙ +: Battery positive terminal connection position.
- ⊙ SOC: These 5 LEDs are used to display the pack SOC and charge or discharge state.
- ⊙ RUN light: green LED lighting to show the battery running status.
- ⊙ ALM light: red LED lighting to show the battery has been alarmed .
- ⊙ Power button: Power on or off the control battery.
- ⊙ PCS: Inverter communication terminal:(RJ45port) follow the CAN protocol (baud rate:500kbps),and RS485(baud rate:9600bps),used to output battery information to the inverter.
- ⊙ OUT: parallel Communication Terminal:(RJ45port) Connect "IN"Terminal of Next battery,for Communication between multiple parallel batteries.
- ⊙ IN: parallel Communication Terminal: (RJ45 port) Connect "OUT" Terminal of Previous battery,for Communication between multiple parallel batteries.

Mounting example

Stacked	Wall mounted
---------	--------------


Support 6 packs in one cluster parallel connected, allows multiple clusters in parallel

All support wall mounted installation, and support for multiple packs in parallel

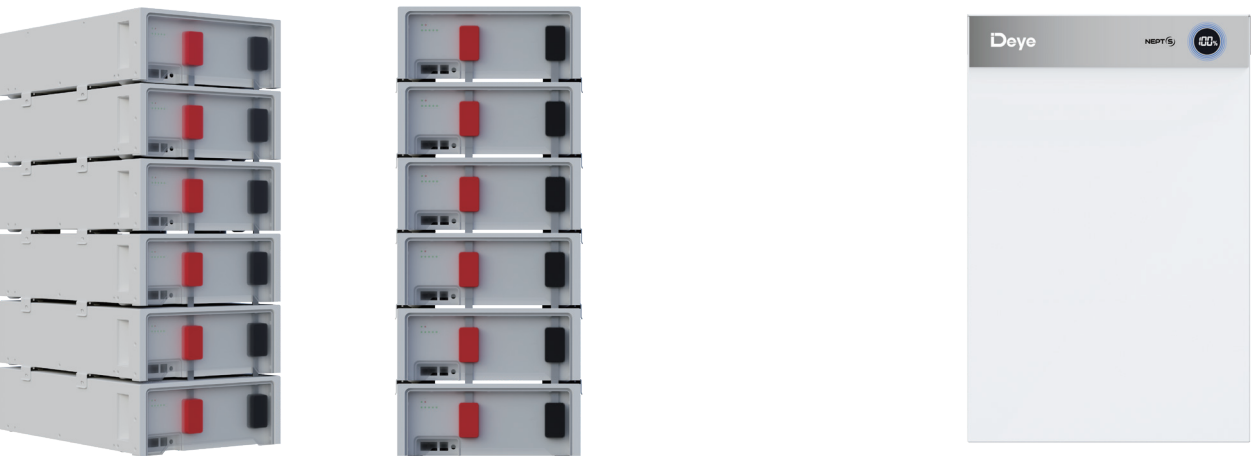

Deye Smart Energy Management System(Optional)

The Deye Smart Energy Management System enables seamless control with smart CT, smart plug, smart switch and solar EV charging, ensuring efficiency and full compatibility with Deye inverters.

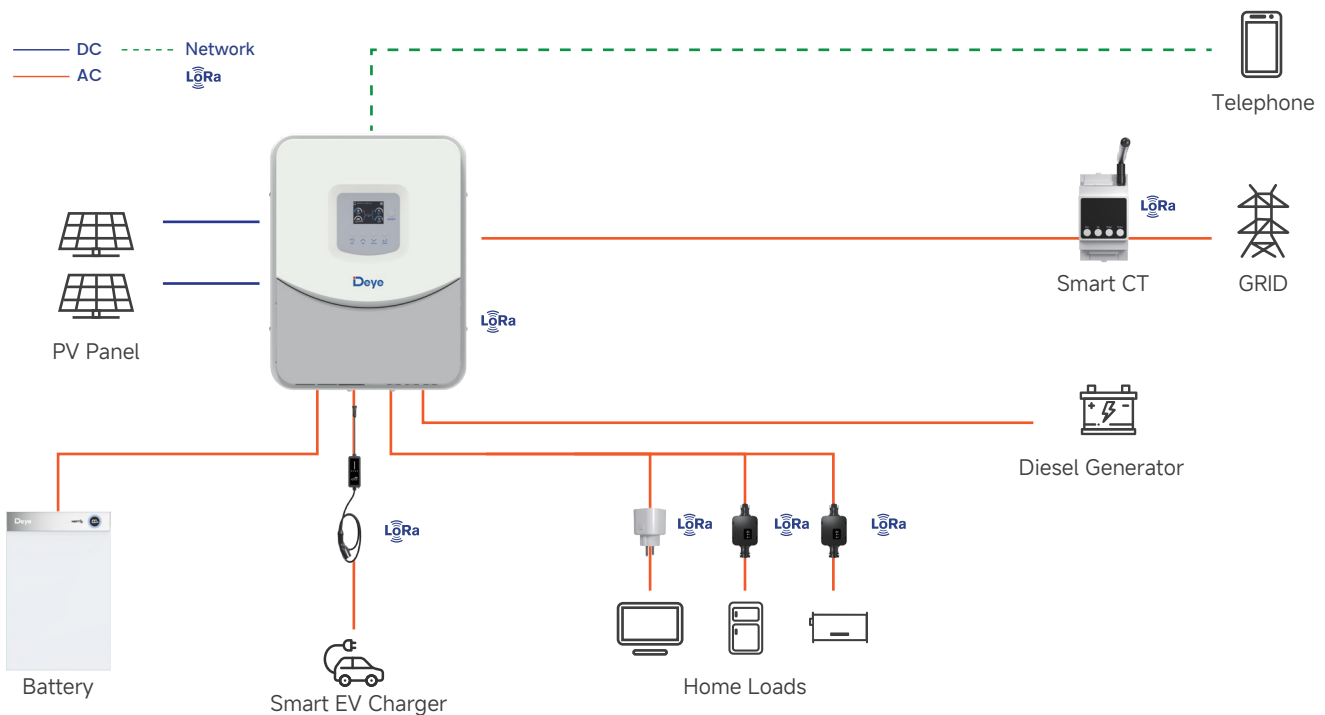

Key Features

- Wireless Zero Export Control**
Enables seamless zero export without the need for complex wiring, simplifying installation.
- Intelligent Load Control**
Automatically manages loads based on time schedules and battery SOC, optimizing energy distribution.
- Solar-Powered EV Charging**
Supports 100% solar charging with dynamic power adjustment for enhanced efficiency and sustainability.
- Full Compatibility**
All Deye hybrid inverters can be upgraded to support this system, ensuring seamless integration with existing setups.
- Precise Off-Grid Load Management**
Ensures that only non-essential loads are disconnected during off-grid operation, maintaining power supply for critical applications.



Deye APP


Bluetooth APP Monitoring

Low Power (Bluetooth LE)

Automated upgrade



Local monitoring mode for battery

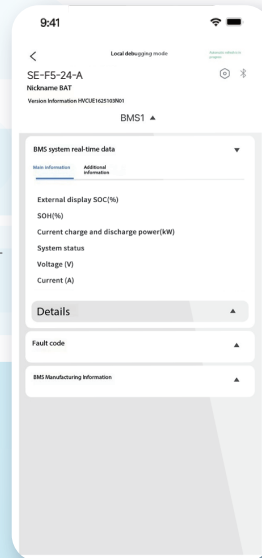



Quick Pairing

No Internet Needed

Portable Control



Remote monitoring mode for ESS(Inverter&Battery)

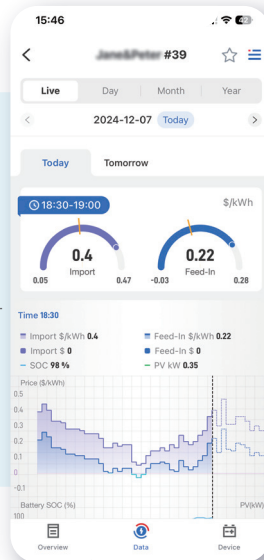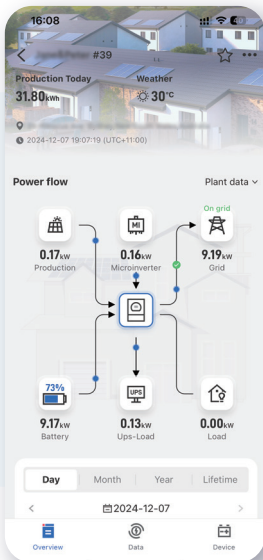

Real-time Equipment Monitoring

Intelligent Charging/Discharging Strategies

AI Data Analytics

Customized Maintenance

Smarten Up Your Home Energy



Download Deye APP to join us!

Embrace a seamless, effortless energy experience that's both ecofriendly and budget-friendly with our intelligent assistant





POWERING YOUR LIFE



www.deyeess.com / www.deyeinverter.com



Deye ESS / Deye New Energy