



SMALL-SCALE C&I ESS SOLUTION HYBRID ENERGY STORAGE SYSTEM

GE-F128/F240/F256 Series Outdoor Battery Cabinet

+

SUN-30~125K Hybrid Inverter

or

SUN-100/125K PCS+MPPT+STS Series Module



Ultimate Protection, Continuing "0" safety accidents

- Six-dimensional safety design, eliminating the risk of fire and explosion
- **D1 electrical isolation + D2 physical insulation + D3 active exhaust + D4 directional venting + D5 aerosol suppression + D6 water fire sprinkler**
- High-intensity cabinet, **unique patented door latch design**, eliminates structural weak points
- **Hour-level fire resistance**, prevent heat spread



Highly Integrated, All-in-one quick deployment

- Outer cabinet wall preset inverter bracket installation position, **no wall bearing concerns, no need to drill**
- **Hybrid inverter**, covering PV, grid, load, generator, and battery interfaces
- Single cabinet can easily deploy **PV+BESS, PV+BESS+DG**



Stable Efficient, Excellent performance ensures returns

- Long-life lithium iron phosphate battery, **≥ 8000 cycles**
- High-efficiency thermal management, **no derating at 45°C**, cell temperature difference **≤6°C**
- **100%** unbalanced output, up to **200%** PV over-matching access



Intelligent Management, Flexible adaptation and expansion

- Leading **rack-level + pack-level + cell-level** energy balancing algorithm, non-inductive pack change and cabinet expansion
- Single cabinet can be configured with a **2/3/4h system of 30~125kW**, up to **10 units** AC-side on/off-grid parallel or **10 units** DC-side battery parallel
- Integrated energy platform, **24/7 AI** smart customization of optimal power usage strategies

Outdoor Battery Cabinet

GE-F240 Series

Model	GE-F144-BC-2-A3	GE-F160-BC-2-A3	GE-F176-BC-2-A3	GE-F192-BC-2-A3	GE-F208-BC-2-A3	GE-F224-BC-2-A3	GE-F240-BC-2-A3
Main Parameters							
Cell Type	LiFePO ₄						
Module Capacity (Ah)	314						
Module Nominal Voltage (Vdc)	51.2						
Module Energy (kWh)	16.08						
Module Qty In Series	9	10	11	12	13	14	15
System Nominal Energy (kWh)	144.69	160.67	176.84	192.92	208.99	225.07	241.15
System Usable Energy (kWh) ¹	144.69	160.67	176.84	192.92	208.99	225.07	241.15
System Nominal Voltage (Vdc)	460.8	512	563.2	614.4	665.6	716.8	768
System Operating Voltage (Vdc)	360~525.6	400~584	440~642.4	480~700.8	520~759.2	560~817.6	600~876
Rated DC Power (kW)	72	80	88	96	104	112	121
Charge/Discharge Current(A) ²	Recommend	157					
	Max. Continuous	180					
	Peak discharge @15s/20~45°C	285					
Other Parameters							
Fire Protection System	Aerosol and Water fire interface, Smoke,temperature and CO gas detection Active exhaust and Explosion venting						
Cooling Method	Smart Air Cooling						
Communication Port	CAN, RS485						
Communication protocol	CAN2.0, Modbus485						
Operating Temperature(°C) ³	-30~55						
Recommend Storage Temperature(°C)	0~35						
Humidity	5% ~ 95%RH (No Condensing)						
Altitude	3000m						
IP Protection	IP55						
Anti Corrosion Level	C4-M						
Dimension(W x D x H,mm)	1303 x 1240 x 2405.5						
Weight(kg)	1920	2035	2150	2265	2380	2495	2610
Installation Location	Floor mount						
Cycle Life	≥8000 (25±2°C,0.5P,EOL70%)						
Warranty	10 years						
Certification	UN38.3, CE, CB, IEC62933, ROHS, REACH						

1. Test conditions : 100% DOD, 0.5P charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.

2. The current is affected by temperature and SOC.

3. Derated operation at > 45°C.

Outdoor Battery Cabinet

		GE-F128 Series		GE-F256 Series
Model	GE-F112-BC-2-A3	GE-F128-BC-2-A3		GE-F256-BC-2-A3
Main Parameters				
Cell Type	LiFePO ₄			
Module Capacity (Ah)	314			
Module Nominal Voltage (Vdc)	51.2			
Module Energy (kWh)	16.08			
Module Qty In Series	7	8	16	
System Nominal Energy (kWh)	112.53	128.61	257.23	
System Usable Energy (kWh) ¹	112.53	128.61	257.23	
System Nominal Voltage (Vdc)	358.4	409.6	819.2	
System Operating Voltage (Vdc)	280-408.8	320-467.2	640-934.4	
Rated DC Power (kW)	56	64	129	
Charge/Discharge Current(A) ²	Recommend	157		
	Max. Continuous	180		
	Peak discharge @15s/20~45°C	285		
Other Parameters				
Fire Protection System	Aerosol and Water fire interface, Smoke,temperature and CO gas detection Active exhaust and Explosion venting			
Cooling Method	SmartAir Cooling			
Communication Port	CAN, RS485			
Communication protocol	CAN2.0, Modbus485			
Operating Temperature(°C) ³	-30~55			
Recommend Storage Temperature(°C)	0~35			
Humidity	5%~95%RH(No Condensing)			
Altitude	3000m			
IP Protection	IP55			
Anti Corrosion Level	C4-M			
Dimension(W x D x H,mm)	998 x 1240 x 2405.5		1303x1240x2510	
Weight(kg)	1575	1690	2770	
Installation Location	Floor mount			
Cycle Life	≥8000(25±2°C,0.5P,EOL70%)			
Warranty	10 years			
Certification	UN38.3, CE, CB, IEC62933, ROHS, REACH			

1. Test conditions : 100% DOD, 0.5P charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.

2. The current is affected by temperature and SOC.

3. Derated operation at > 45°C.

Hybrid Inverter

Model	SUN-60K-SG02HP3-EU-EM6	SUN-70K-SG02HP3-EU-EM6	SUN-80K-SG02HP3-EU-EM6	SUN-100K-SG02HP3-EU-GM10	SUN-125K-SG02HP3-EU-GM10
Battery Input Data					
Battery Type	Lithium-ion				
Battery Voltage Range (V)	160-1000				
Max. Charging Current (A)	80+80			100+100	
Max. Discharging Current (A)	80+80			100+100	
Charging Strategy for Li-ion Battery	Self-adaption to BMS				
Number of Battery Input	2				
PV String Input Data					
Max. PV Access Power (W)	120000	140000	160000	200000	250000
Max. PV Input Power (W)	96000	112000	128000	160000	200000
Max. PV Input Voltage (V)	1000				
Start-up Voltage (V)	180				
MPPT Voltage Range (V)	150-850				
Rated PV Input Voltage (V)	650				
Max. Operating PV Input Current (A)	36+36+36+36+36+36			42+42+42+42+42+42+42+42+42+42	
Max. Input Short-Circuit Current (A)	54+54+54+54+54+54			63+63+63+63+63+63+63+63+63+63	
No. of MPP Trackers/	6/2+2+2+2+2+2			10/2+2+2+2+2+2+2+2+2	
No. of Strings MPP Tracker					
AC Input/Output Data					
Rated AC Input/Output Active Power (W)	60000	70000	80000	100000	125000
Max. AC Input/Output Apparent Power (VA)	66000	77000	88000	110000	135000
Rated AC Input/Output Current (A)	91/87	106.1/101.5	121.3/116	151.6/145.0	189.4/181.2
Max. AC Input/Output Current (A)	100/95.7	116.7/111.6	133.4/127.6	166.7/159.5	204.6/195.7
Max. Continuous AC Passthrough (grid to load)(A)	200			250	
Peak Power (off-grid) (W)	1.5 Times Of Rated Power,10s				
Power Factor Adjustment Range	0.8 Leading to 0.8 Lagging				
Rated Input/Output Voltage/Range (V)	220/380V, 230/400V 0.85Un-1.1Un				
Rated Input/Output Grid Frequency/Range(Hz)	50/45-55, 60/55-65				
Grid Connection Form	3L+N+PE				
Total Current Harmonic Distortion THDi	<3% (Of Rated Power)				
DC Injection Current	<0.5% In				
Efficiency					
Max. Efficiency	98.7%				
Euro Efficiency	98.10%				
MPPT Efficiency	> 99%				
Equipment Protection					
Integrated	DC Reverse Polarity Protection, AC Output Overcurrent Protection, Thermal Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, DC Component Monitoring, Arc Fault Circuit Interrupter (AFCI) (Optional), Anti-islanding Protection, DC Switch, Insulation Impedance Detection, Residual Current Detection				
Surge Protection Level	TYPE II(DC),TYPE II(AC)				
Interface					
LCD/LED Display	LCD+LED				
Communication Interface	RS485,RS232,CAN				
Monitor Mode	GPRS/WIFI/Bluetooth/4G/LAN(optional)				
General Data					
Operating Temperature Range (°C)	-40 to +60, >45 Derating				
Permissible Ambient Humidity	0-100%				
Permissible Altitude	3000m				
Noise (dB)	≤ 65				
Ingress Protection(IP) Rating	IP65				
Inverter Topology	Non-Isolated				
Over Voltage Category	OVC II(DC), OVC III(AC)				
Cabinet Size (WxHxD mm)	606×927×314 (Excluding Connectors and Brackets)			734×1091×344 (Excluding Connectors and Brackets)	
Weight (kg)	105			161.7	
Type of Cooling	Intelligent Air Cooling			Intelligent Air Cooling	
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy			5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy	
Grid Regulation	IEC 61727,IEC 62116,CEI 0-21,EN 50549, NRS 097,RD 140,UNE 217002,OVE-Richtlinie R25,G99,VDE-AR-N 4105				
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				

Model	SUN-30K-SG02HP3 -EU-BM3(-P)	SUN-40K-SG02HP3 -EU-BM4(-P)	SUN-50K-SG02HP3 -EU-BM4(-P)
Battery Input Data			
Battery Type	Lithium-ion		
Battery Voltage Range (V)	160-800		
Max. Charging Current (A)	100(160)	100(160)	100(160)
Max. Discharging Current (A)	100(160)	100(160)	100(160)
Charging Strategy for Li-ion Battery	Self-adaption to BMS		
Number of Battery Input	1		
PV String Input Data			
Max. PV Access Power (W)	60000	80000	100000
Max. PV Input Power (W)	48000	64000	80000
Max. PV Input Voltage (V)	1000		
Start-up Voltage (V)	180		
MPPT Voltage Range (V)	150-850		
Rated PV Input Voltage (V)	600		
Max. Operating PV Input Current (A)	36+36+36	36+36+36+36	
Max. Input Short-Circuit Current (A)	55+55+55	55+55+55+55	
No. of MPP Trackers/ No. of Strings MPP Tracker	3/2+2+2	4/2+2+2+2	
AC Input/Output Data			
Rated AC Input/Output Active Power (W)	30000	40000	50000
Max. AC Input/Output Apparent Power (VA)	33000	44000	55000
Rated AC Input/Output Current (A)	45.5/43.5	60.7/58	75.8/72.5
Max. AC Input/Output Current (A)	50/47.9	66.7/63.8	83.4/79.8
Max. Continuous AC Passthrough (grid to load)(A)	200		
Peak Power (off-grid) (W)	1.5 times of rated power, 10s		
Power Factor Adjustment Range	0.8 leading to 0.8 lagging		
Rated Input/Output Voltage/Range (V)	220/380V, 230/400V, 0.85Un-1.1Un		
Rated Input/Output Grid Frequency/Range(Hz)	50/45-55, 60/55-65		
Grid Connection Form	3L+N+PE		
Total Current Harmonic Distortion THDi	<3% (of nominal power)		
DC Injection Current	<0.5% In		
Efficiency			
Max. Efficiency	97.60%		
Euro Efficiency	97.0%		
MPPT Efficiency	>99%		
Equipment Protection			
Integrated	DC Reverse Polarity Protection, AC Output Overcurrent Protection, Thermal Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, DC Component Monitoring, Arc Fault Circuit Interrupter (optional), Anti-islanding Protection, DC Switch, Insulation Impedance Detection, Residual Current Detection		
Surge Protection Level	TYPE II(DC), TYPE II(AC)		
Interface			
LCD/LED Display	LCD		
Communication Interface	WIFI/RS485 /CAN		
Monitor Mode	GPRS/WIFI/Bluetooth/4G		
General Data			
Operating Temperature Range (°C)	-40 to +60, >45 Derating		
Permissible Ambient Humidity	0-100%		
Permissible Altitude	3000m		
Noise (dB)	≤ 65		
Ingress Protection(IP) Rating	IP 65		
Inverter Topology	Non-Isolated		
Over Voltage Category	OVC II(DC), OVC III(AC)		
Cabinet Size (WxHxD mm)	528×793×278 (Excluding Connectors and Brackets)		
Weight (kg)	65		
Type of Cooling	Intelligent Air Cooling		
Warranty	Standard 5 years, extended warranty		
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105		
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		

HESS Solution (Recommend)



GE-F128 Series

+



SUN-30K-SG02HP3-EU-BM3
SUN-40K-SG02HP3-EU-BM4
SUN-50K-SG02HP3-EU-BM4-P

Or



SUN-60K-SG02HP3-EU-EM6



GE-F240 Series

+



SUN-50K-SG02HP3-EU-BM4

Or



SUN-60K/70K/80K-SG02HP3-EU-EM6

Or



SUN-100K/125K-SG02HP3-EU-GM10



GE-F256 Series

+



SUN-125K-SG02HP3-EU-GM10

Or



SUN-100K/125K-PCS01HP3+
SUN MPPT-L01-EU-AM8*+
SUN-ST5500L*

Power Unit

Battery Cabinet Model

Specification

2h HESS Solution

SUN-50K-SG02HP3-EU-BM4-P	GE-F112-BC-2-A3	50kW/112kWh
SUN-60K-SG02HP3-EU-EM6	GE-F128-BC-2-A3	60kW/128kWh
SUN-80K-SG02HP3-EU-EM6	GE-F176-BC-2-A3	80kW/176kWh
SUN-100K-SG02HP3-EU-GM10	GE-F208-BC-2-A3	100kW/208kWh
SUN-125K-SG02HP3-EU-GM10	GE-F240/F256-BC-2-A3	125kW/241&257kWh
SUN-100/125K-PCS01HP3 +SUN-MPPT-L01-EU-AM8*+SUN-ST5500L*	GE-F256-BC-2-A3	100&125kW/257kWh

3h HESS Solution




SUN-40K-SG02HP3-EU-BM4	GE-F128-BC-2-A3	40kW/128kWh
SUN-60K-SG02HP3-EU-EM6	GE-F176-BC-2-A3	60kW/176kWh
SUN-70K-SG02HP3-EU-EM6	GE-F208-BC-2-A3	70kW/208kWh
SUN-80K-SG02HP3-EU-EM6	GE-F240-BC-2-A3	80kW/241kWh

4h HESS Solution

SUN-30K-SG02HP3-EU-BM3	GE-F128-BC-2-A3	30kW/128kWh
SUN-50K-SG02HP3-EU-BM4	GE-F208-BC-2-A3	50kW/208kWh
SUN-60K-SG02HP3-EU-EM6	GE-F240-BC-2-A3	60kW/241kWh

AC/DC Side Parallel Expansion (Capacity & Power)

HESS HYBRID ENERGY STORAGE SYSTEM

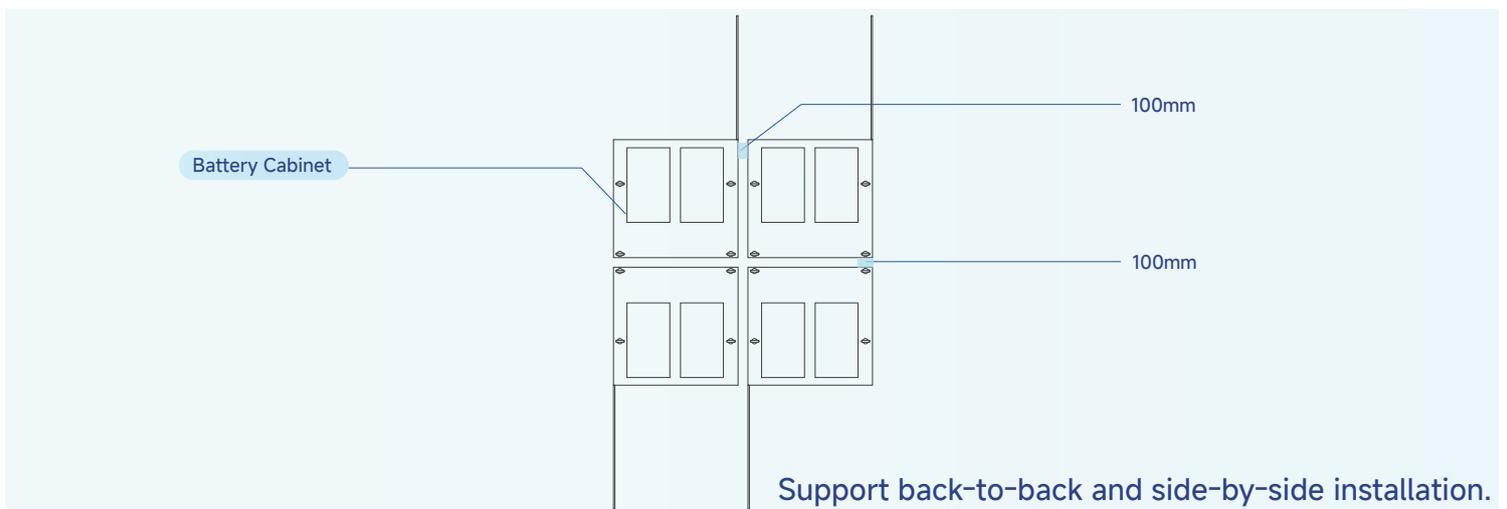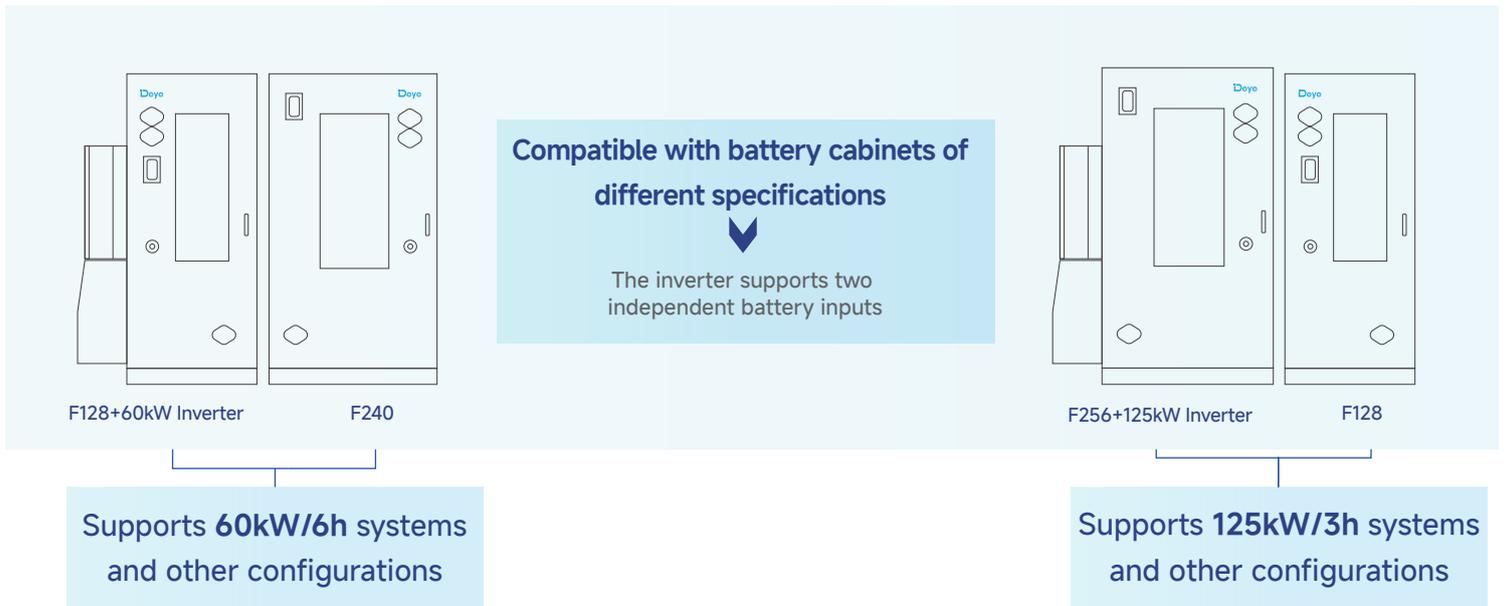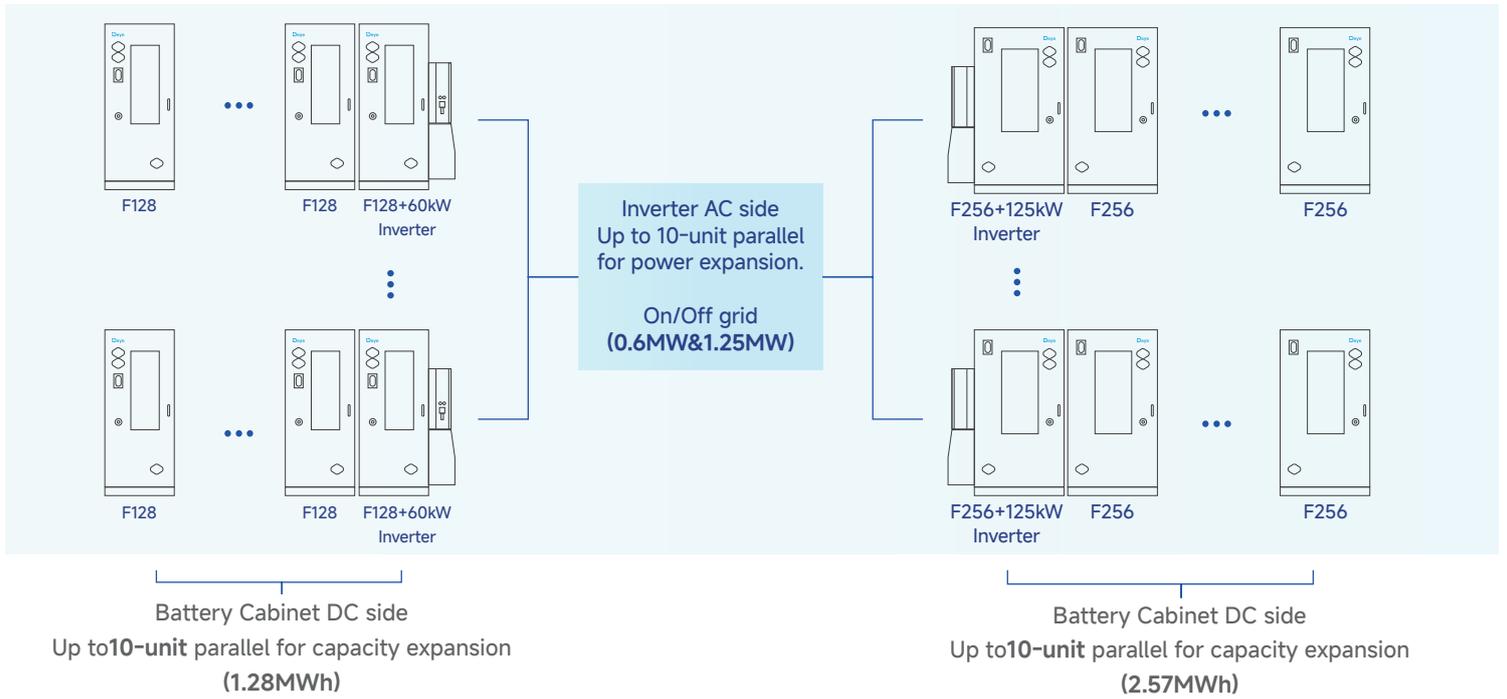


Deye Cloud

All-in-one Energy & Device Management Platform

- Unlock significant savings
- Individual Add-on for dynamic tariff
- Intelligent charging/discharging strategies
- Tailored solution to deye devices
- Real-time equipment monitoring
- Best energy scheduling solutions by Deye Copilot
- 24/7 AI Assistant support

Switch flexibly between autonomous and manual control

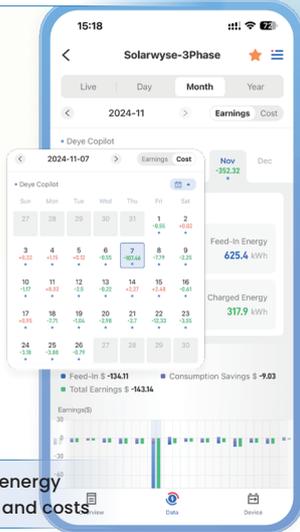

Display energy savings and costs



Support dynamic tariff and flat-rate

AI Assistant



Offer response suggestions and personalized support experience

Support over 30 languages

Analyze dynamic pricing, predict power load and PV generation to optimize energy dispatch and minimize electricity costs



Smarten Up Your Hybrid Energy Storage System

Download Deye Cloud APP to join us!

Embrace a seamless, effortless energy experience that's both eco-friendly and budget-friendly with our intelligent assistant



 APP & Web Manage your energy effortlessly	 Cloud-edge Collaboration Faster and more efficient	 Accelerated Connection Optimized for speed and performance	 Localized Data Centers Ensure data sovereignty and compliance in EU & US	 Deye Copilot AI-powered energy analysis and control	 AI Assistant 24/7 support, fast, efficient, in your language
---	--	--	--	---	--



POWERING YOUR LIFE



www.deyeess.com / www.deyeinverter.com



Deye ESS / Deye New Energy