


RESIDENTIAL ESS SOLUTION

DEYE SPRING AI SERIES

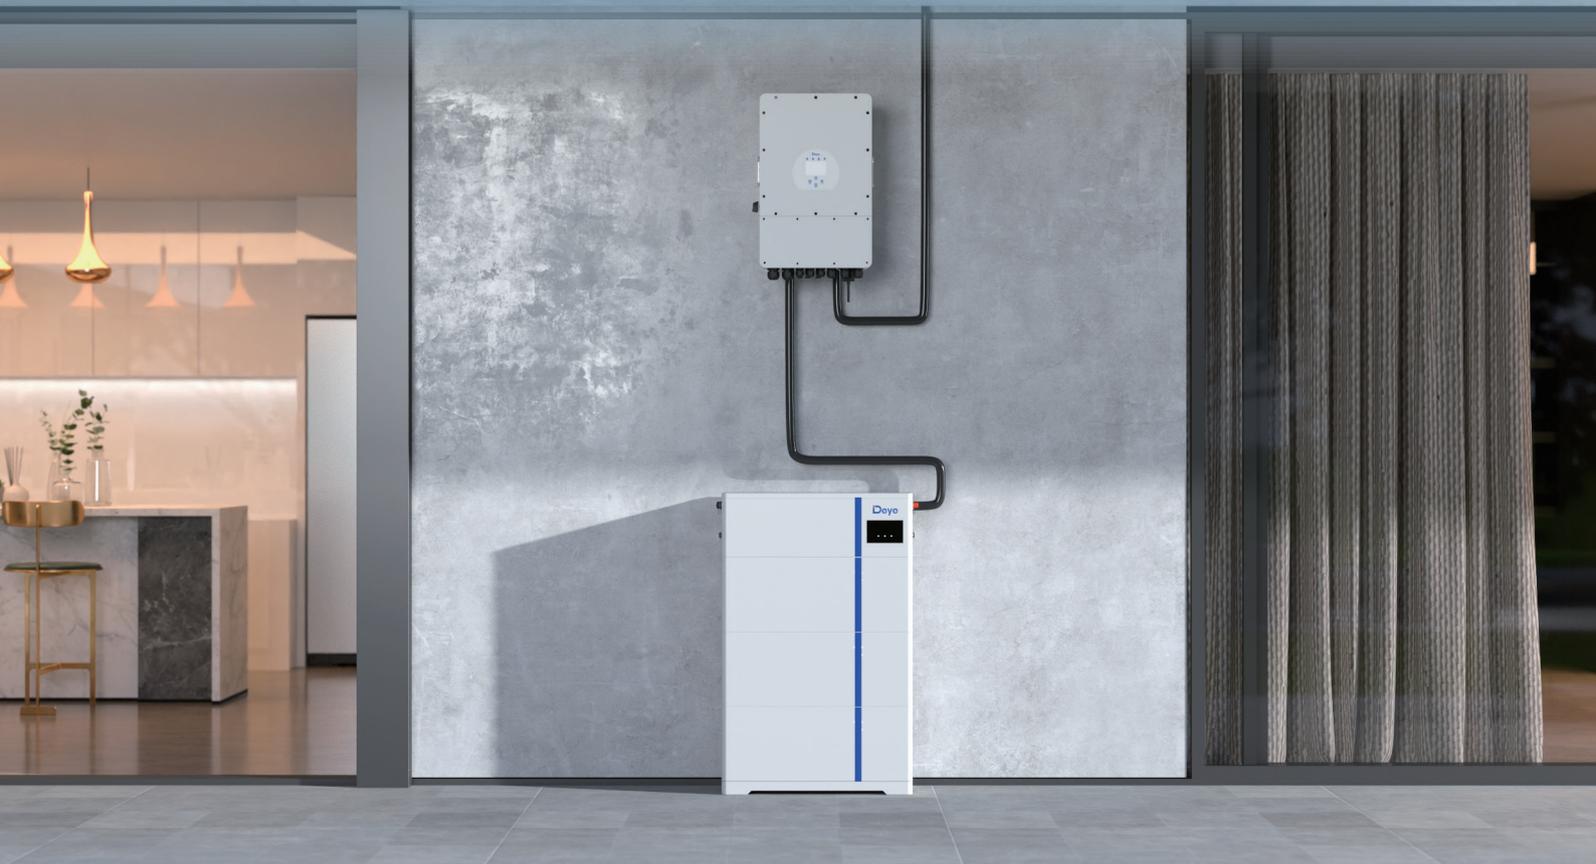

Reliable

- High discharge power, IP65
- Natural cooling, wide temp: -20°C to 55°C



Eco-Friendly

- Non-toxic materials
- Pollution-free



Quick Installation

- Flat, stackable design
- Floor-mounted, no wiring



Flexible

- Modular, Max. 6 clusters in parallel (36pcs)
- Max capacity 184kWh
- Residential/commercial use



Convenient

- Auto networking, easy maintenance
- Remote monitoring, firmware upgrades



Safer

- Cobalt-free LFP battery
- Intelligent BMS, long lifespan, high efficiency

≥6000

Cycles

IP65

Rated for indoor and outdoor use

70%

EOL

10 years

Waranty for long-term peace of mind

Model		AI-W-B					
Main Parameter							
Battery Model Number		AI-W5 . 1-B	AI-W10.2-B	AI-W15.3-B	AI-W20.4-B	AI-W25.6-B	AI-W30.7-B
Number of battery units in parallel (Optional)		1	2	3	4	5	6
Battery Chemistry		LiFePO ₄					
Built-in Circuit Breaker		125A 2P, 60Vdc					
Battery Module Energy (kWh)		5.12					
Battery Module Voltage (V)		51.2					
Battery Module Capacity (Ah)		100					
Nominal Voltage (V)		51.2					
Operating Voltage (V)		44.8 ~ 57.6					
Nominal Energy (kWh)		5.12	10.24	15.36	20.48	25.6	30.72
Usable Energy (kWh) ^[1]		5.12	10.24	15.36	20.48	25.6	30.72
Rated DC Power (KW)		2.5	5	7.5	10	12	12
Charge / Discharge Current (A) ^[2]	Recommend	50	100	150	200	250	250
	Max.	100	200	250	250	250	250
	Peak (10s, 25°C)	150	270	360	360	360	360
Other Parameter							
Recommend Depth of Discharge		100%					
PDU1 Weight (kg)		18.5					
PDU3 Weight (kg)		18.5					
Battery Pack Weight (kg)		53					
Base Weight (kg)		6.5					
Base Dimension (W/D/H, mm)		720±3×255±1.5×68±1.5					
PDU1 Dimension (W/D/H, mm)		720±3×255±1.5×240±1.5					
PDU3 Dimension (W/D/H, mm)		720±3×255±1.5×239±1.5					
Battery Module Dimension (W × D × H, mm)		720±3×255±1.5×300±1.5					
Master LED Indicator		Battery module : 3LED (working, alarming, protecting) , PDU module : 5LED (SOC : 20% ~ 100%) & 3LED (working, alarming, protecting)					
IP Rating of Enclosure		IP65 (after stacking)					
Operating Temperature		Charge: 0~55°C (-20°C~55°C when heating on)/ Discharge : -20°C ~ 55°C					
Standard charging method by manufacturer		Charge at 25±2°C at constant current 50A until the voltage reaches 57.6V.					
Standard discharging method by manufacturer		Discharge at 25±2°C at constant current 50A until the voltage reaches 44.8V.					
Storage Temperature		0°C ~ 35°C					
Humidity		5% ~ 95%, non-condensing					
Altitude		≤3000m					
Installation		Floor-Mounted					
Communication Port		CAN2.0, RS485					
Cycle Life		≥6000 (25°C±2°C , 0.5C / 0.5C, 70%EOL)					
Energy Throughput		16MWh (Battery Module @70%EOL)					
Warranty Period ^[3]		10 years					
Certification		UN38.3, IEC62619, CE, UK, VDE2510-50, CEI0-21,CE-LVD, CEC, FCC, UL1973, UL9540A					

[1]DC Usable Energy, test conditions: 100% DOD, 0.5C charge & discharge at 25°C . System usable energy may vary due to system configuration parameters.

[2]The current is affected by temperature and SOC.

[3]Conditions apply, refer to Deye Warranty Letter.

[4]Made in China.