



# UTILITY-SCALE ESS SOLUTION

WS-L5000-BC-2

## WS-L5000-BC-2 | The Low LCOS Multi-intelligent Energy Storage Solution



### Economical and efficient

- 20-foot container 5015kWh
- Maximum efficiency 94.5%
- Shoulder-to-shoulder/back-to-back installation



### Flexible and convenient

- Liquid cooling circuit equipped with bidirectional shut-off valve
- Equipped with waste liquid collection device
- Single/dual circuit output, 2/4h application



### Smart Cloud Management

- AI-Powered Load Optimization
- 24/7 Remote Monitoring & O&M
- Real-Time Battery Health & Safety Alerts
- Cloud-Connected Ecosystem



### Ultimate Safety

- 2+3 Level Fire Protection System
- 3+2+1 Level Electrical Safety Protection

# Liquid-Cooled ESS

## Model

WS-L5000-BC-2


### Battery Data

Battery Type	LiFePO4
Nominal Capacity ( Cell )	314Ah
PACK Configuration	1P104S
RACK Configuration	4*1P104S
System Configuration	2*6P416S (12P416S)
Nominal Voltage	1331.2Vdc (1144-1497.6Vdc)
Nominal Energy	5015kWh
Nominal Current	2*939A
Charge/Discharge Rate	0.5P
DC efficiency	≥94.5%

### System Data

Operating Temperature	-30°C ~ +55°C (>45°C derating)
Storage Temperature	-30°C ~ +60°C
Humidity	0 ~ 95%RH
Type of cooling BAT	Liquid cooling
Fire Suppression	Aerosol、Water
Ingress Protection	IP55
Anticorrosion grade	C4/C5
Altitude	≤3000m
Weight	≤40500kg
Dimensions ( W × D × H )	6058*2438*2896mm
Communication	Ethernet/CAN
Standard compliance	IEC62619,IEC62477,IEC62933,IEC63056,IEC61000,UN38.3,UN3536,NFPA855,UL9540A

## Architecture Diagram

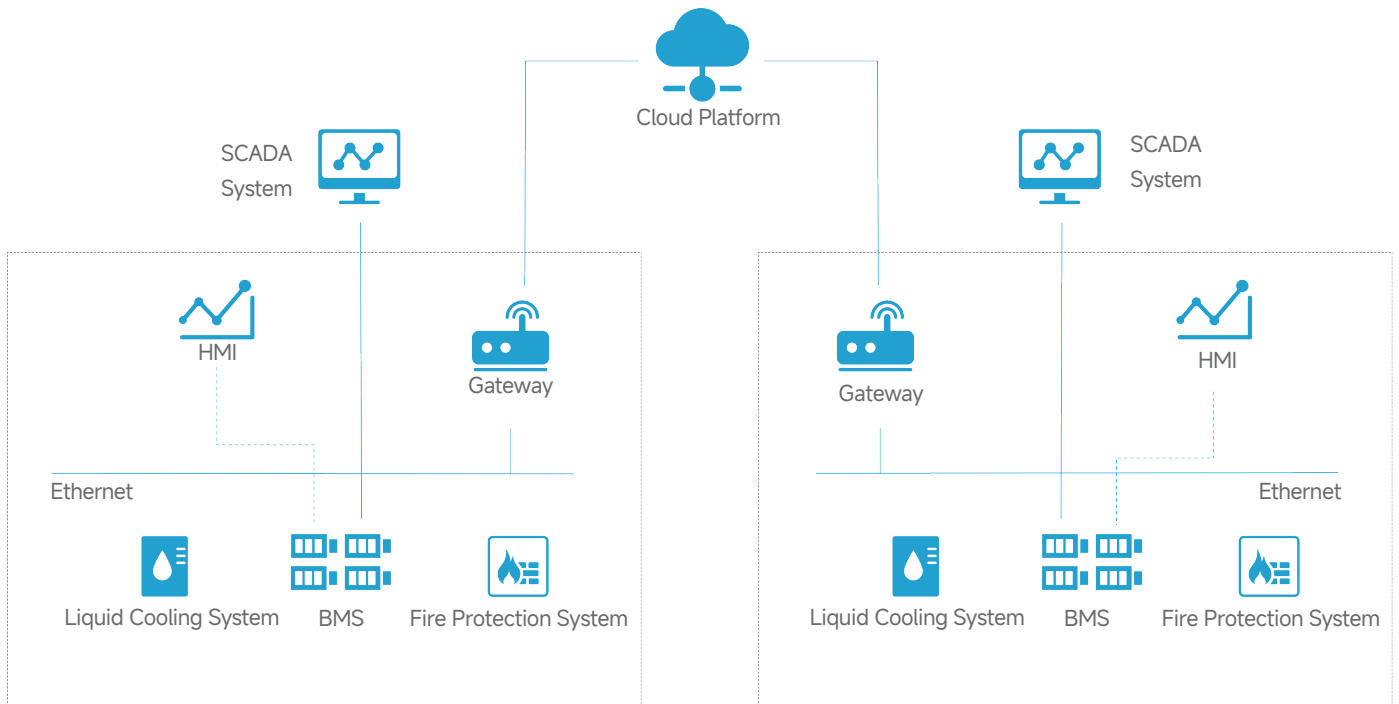



**POWERING YOUR LIFE**



[www.deyeess.com](http://www.deyeess.com) / [www.deyeinverter.com](http://www.deyeinverter.com)



**Deye ESS / Deye New Energy**