



SMALL-SCALE C&I ESS SOLUTION

Deye Summer bos Series

BOS-GL60 & BOS-GH60

 **10-Year Warranty**
Safest LFP battery & Intelligent BMS

 **Battery Protection**
Auto charge/discharge & Cell voltage balancing

 **Flexible Expansion**
Support 4 ~ 12 packs in series

 **Intelligent Control**
Over-discharge/charge/current and temp protection

 **High-Efficiency Use**
Low self-discharge for 6 months & No memory effect

 **Smart Control**
Remote monitoring, management, and upgrades

Rack-Mounted Battery



Model	BOS-GL60		BOS-GH40	BOS-GH60
Main Parameter				
Cell Chemistry	LiFePO ₄			
Module Energy (kWh)	5.12			
Module Nominal Voltage (V)	51.2			
Module Capacity (Ah)	100			
Battery Module Qty In Series (Optional)	12 (2P6S)	8 (1P8S)	12 (1P12S)	
System Nominal Voltage (V)	307.2	409.6	614.4	
System Operating Voltage (V)	240 ~ 350.4	320 ~ 467.2	480 ~ 700.8	
System Energy (kWh)	61.44	40.96	61.44	
System Usable Energy (kWh)	55.29	36.86	55.29	
Charge / Discharge ² Current (A)	Recommend	100		
	Nominal	50		
	Peak Discharge (2 mins, 25°C)	100		
DC Technical Specification				
Working Temperature (°C)	Charge : 0 ~ 55 / Discharge : -20 ~ 55			
Status Indicator	Yellow : Battery High Voltage Power On Red : Battery System Alarm			
Communication Port	CAN2.0 / RS485			
Humidity	5% ~ 85%RH			
Altitude	≤2000m			
IP Rating of Enclosure	IP20			
Dimension (W × D × H, mm)	530 × 667 × 2187	530 × 667 × 1629	530 × 667 × 2219	
Weight Approximate (kg)	75+45 × 12+20=635kg	53+45 × 8+20=433kg	75+45 × 12+20=635kg	
Installation Location	Rack Mounting			
Storage Temperature (°C)	0 ~ 35			
Recommend Depth of Discharge	90%			
Cycle Life	25±2°C, 0.5C / 0.5C, EOL70%≥6000			
Warranty ³	10 years			
Certification	UL1973 / UL9540A / UN38.3 / UL9540			

1. DC Usable Energy, test conditions : 90% DOD, 0.3C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.

2. The current is affected by temperature and SOC.

3. The warranty is due whichever reached first of warranty period or life cycle power.


Rack-Mounted Battery

Backup power duration plan	1 hour				2 hours				
Hybrid inverter power	30kW	60kW	60kW	30kW					
Battery model	BOS-GH40	BOS-GH60	BOS-GH60	BOS-GH60	BOS-GH60	BOS-GH45	BOS-GH50	BOS-GH55	BOS-GH60
Number of batteries	1 pc	1 pc	2 pcs	1 pcs					

BOS-GH60 | Minimum 4 battery packs connected in series, maximum 12 batteries


Battery Module Number	BOS-GH20	BOS-GH25	BOS-GH30	BOS-GH35	BOS-GH40	BOS-GH45	BOS-GH50	BOS-GH55	BOS-GH60
Battery Module Qty In Series (Optional)	4	5	6	7	8	9	10	11	12
System Energy (kWh)	20.48	25.6	30.72	35.84	40.96	46.08	51.2	56.32	61.44

Supports up to 16 battery clusters in parallel
Supports up to 10 AC inverters in parallel

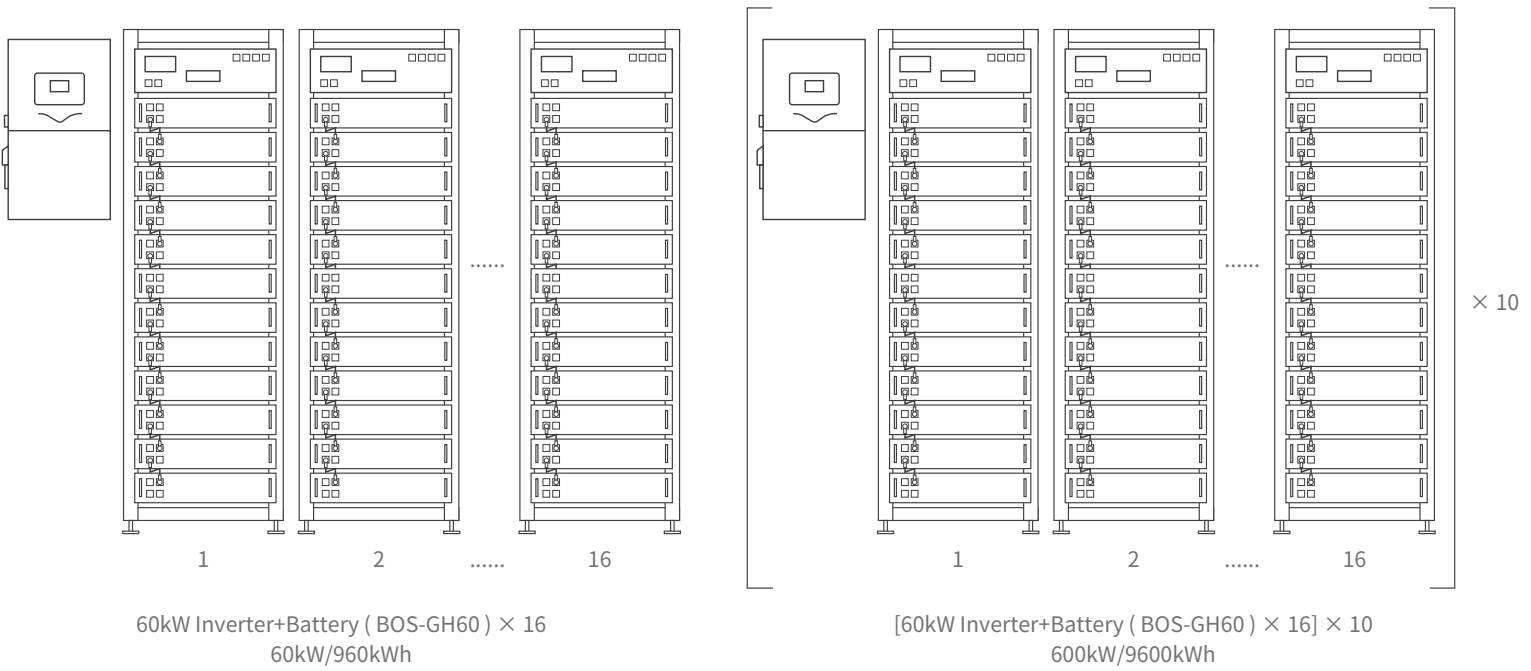


BOS-GL60

Supports up to 16 battery clusters in parallel
Supports up to 10 AC inverters in parallel

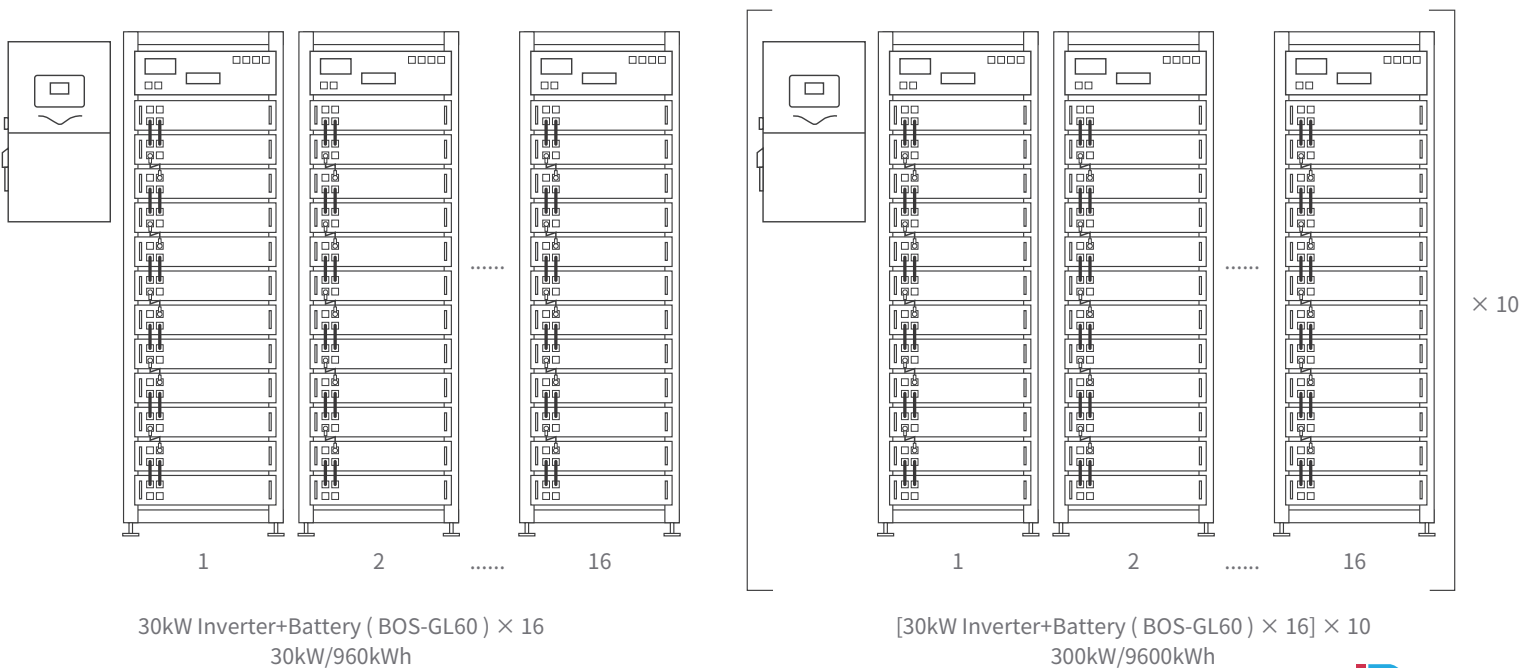

Model	Description
BOS-G-PDU-NA	High Voltage Battery cluster control box conforming to North American Standard
Operating Voltage	120 ~ 750Vdc
Nominal Charge / Discharge Current	100A
Max.Charge / Discharge Current	125A
DC Input Rating	12±2%V / 4.15A
Operating Temperature Range	-20 ~ 65°C
Ingress Protection	IP20
Dimension (W× D× H)	440× 570× 150mm
Weight Approximate	20kg
BOS-G-Pack5.1-D	5.12 kwh battery module
Battery Type	LiFePO ₄ (LFP)
Nominal Voltage	51.2Vdc
Rated Capacity	100Ah
Rated Energy	5.12kWh
Nominal Charge / Discharge Current	100A
Peak.Discharge Current	125A
Charge Temperature	0 ~ 55°C
Discharge Temperature	-20°C ~ 55°C
Storage Temperature	0°C ~ 35°C
Ingress Protection	IP20
Dimension (W× D× H)	440× 570× 133mm
Weight Approximate	45kg
3U-HCabinet (Optional)	Standard 19inch rack can install 12 / 8 pcs batteries and 1 pcs High Voltage Battery cluster control box

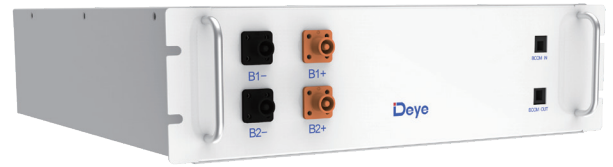

Dimension (W× D× H) 530× 667× 1629mm / 530× 667× 2219mm
 Weight Approximate 53kg / 75kg

